CIGARETTE LIGHTER ASSY


REPLACEMENT

6709K–01

HINT:

COMPONENTS: See page 67–1

1. REMOVE INSTRUMENT PANEL ASH RECEPTACLE ASSY
(See page 71–10)

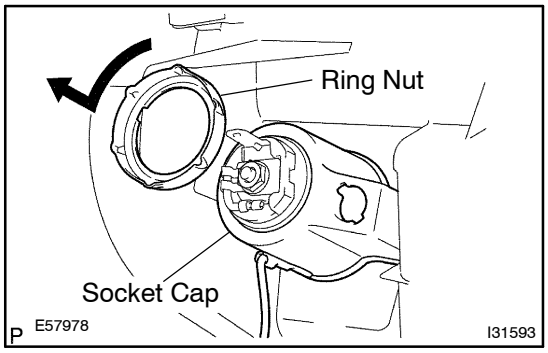

2. REMOVE CIGARETTE LIGHTER ASSY

(a) Turn the ring nut counterclockwise to remove it.
(b) Remove the cigarette lighter assy from the instrument panel ash receptacle assy.

3. INSTALL CIGARETTE LIGHTER ASSY

(a) Properly position the socket at the cutout of the instrument panel ash receptacle assy and insert them.
(b) Install the socket cap.
(c) Turn the ring nut clockwise from the backside.