COMBINATION METER ASSY


7105Q–01

OVERHAUL

HINT:


COMPONENTS: See page 71–7

1. REMOVE INSTRUMENT CLUSTER FINISH PANEL
(See page 71–10)

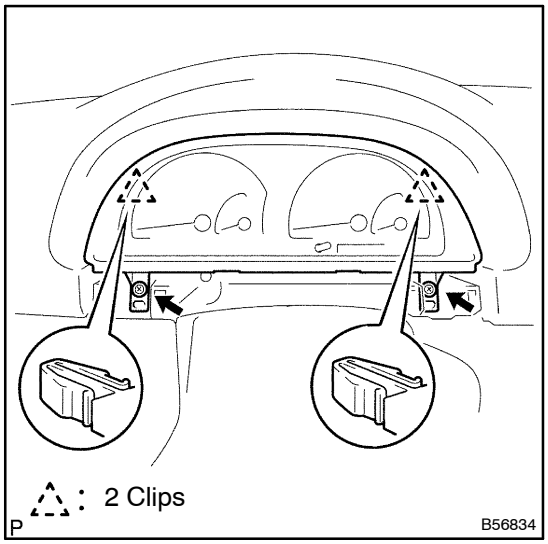

2. REMOVE COMBINATION METER ASSY

(a) Remove the 2 screws and disengage the 2 clips.
(b) Disconnect the connectors and remove the combination meter assy.

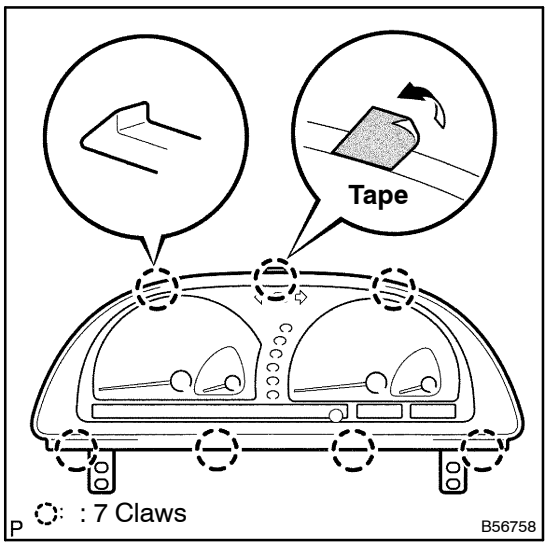

3. REMOVE COMBINATION METER GLASS

(a) Reverse the combination meter assy and remove the 2 screws.
(b) Remove the tape.
(c) Disengage the 7 claws and remove the combination meter glass.