REAR SPOILER SUB–ASSY

760CN–02

REPLACEMENT

HINT:

Installation is in the reverse order of the removal. But the installation is indicated only when it has a point.

1. REMOVE LUGGAGE COMPARTMENT DOOR COVER

(a) Remove the 15 clips and luggage compartment door cover.

2. REMOVE REAR SPOILER SUB–ASSY


(a) Remove the 2 nuts.

(b) Put protective tape onto the body.

(c) Using a heat light, heat the spoiler 40 – 60°C (104 – 140°F).

NOTICE:

Do not heat the spoiler excessively.

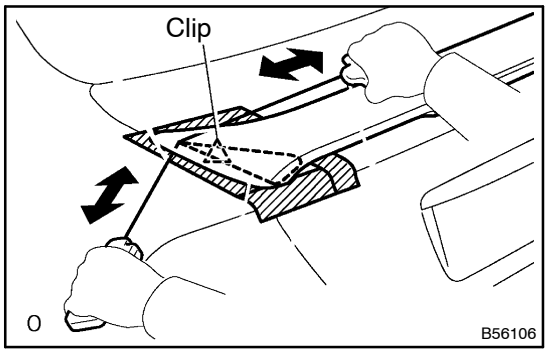

(d) Tie both piano wire ends to a wooden blocks or similar object.


(1) Scrape the adhesive tape off by pulling the piano wire as shown in the illustration.

(2) If reusing the rear spoiler, take care not to damage the rear spoiler.

NOTICE:

Do not damage the body.

(e) Disconnect the connector.

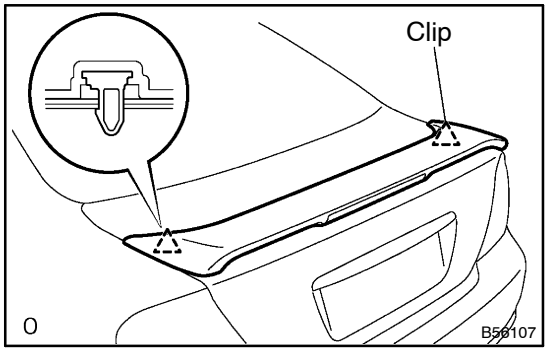

(f) Remove the 2 clips and rear spoiler.

3. REMOVE CENTER STOP LAMP ASSY (See page 65–16)

(a) Remove the 2 bolts and part of the center stop lamp.

4. INSTALL REAR SPOILER SUB–ASSY

(a) Using a heat light, heat the body mounting surface to 40 – 60°C (104 – 140°F).

NOTICE:

Do not heat the body excessively.

(b) Remove the protective tape from the body.

(c) Wipe off the stains with cleaner.

(d) Clean the rear spoiler (if reusing the spoiler).


(1) Using a heat light, heat the rear spoiler to 40 – 60°C (104 – 140°F).

NOTICE:

Do not heat the spoiler excessively.

(2) Remove the adhesive tape from the rear spoiler.

(3) Wipe off the stains with cleaner.

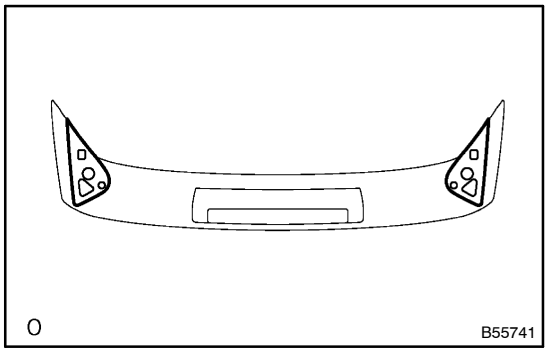

(4) Install new adhesive tape to the rear spoiler as shown in the illustration.

(e) Using a heat light, heat the body and moulding.

HINT:

- Body: 40 – 60°C (104 – 140°F)
- Moulding: 20 – 30°C (68 – 86°F)

(f) Install the rear spoiler with 2 nuts.