FRONT DOOR BELT MOULDING ASSY LH


760CI–01

REPLACEMENT

HINT:

- Installation is in the reverse order of removal. But the installation is indicated only when it has a point.
- In the RH side, work in the same procedure as in the LH side.

1. **REMOVE POWER WINDOW REGULATOR SWITCH ASSY**
   (See page 75–8)
2. **REMOVE FRONT DOOR LOWER FRAME BRACKET GARNISH LH**
   (See page 75–8)
3. **REMOVE FRONT DOOR INSIDE HANDLE BEZEL PLUG LH**
   (See page 75–8)
4. **REMOVE FRONT DOOR TRIM BOARD SUB–ASSY LH**
   (See page 75–8)
5. **REMOVE OUTER REAR VIEW MIRROR ASSY LH**
   (See page 75–8)

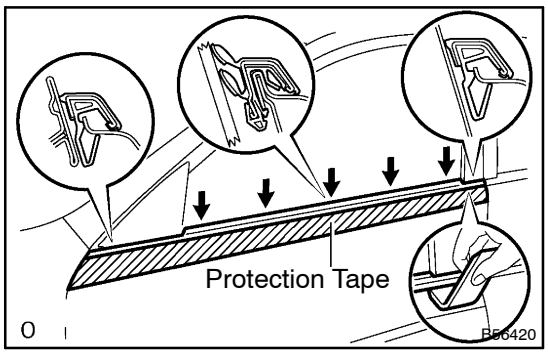

6. **REMOVE FRONT DOOR BELT MOULDING ASSY LH**

(a) Put protective tape under the front door belt moulding.
(b) Using a moulding remover or scraper, remove the front door belt moulding.

HINT:
Tape the scraper tip before use.