
REAR DOOR BELT MOULDING ASSY LH

760CJ–01

REPLACEMENT

HINT:

- Installation is in the reverse order of removal. But the installation is indicated only when it has a point.
- In the RH side, work in the same procedure as in the LH side.

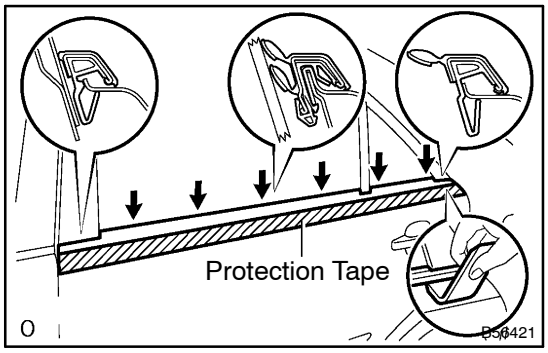

1. REMOVE REAR DOOR BELT MOULDING ASSY LH

(a) Put protective tape under the rear door belt moulding.
(b) Using a moulding remover or scraper, remove the rear door belt moulding.

HINT:
Tape the scraper tip before use.