
STEERING PAD SWITCH

REPLACEMENT

8201Q–01

1. DISCONNECT BATTERY NEGATIVE TERMINAL(See page 60–1)
2. REMOVE STEERING WHEEL COVER LOWER NO.2

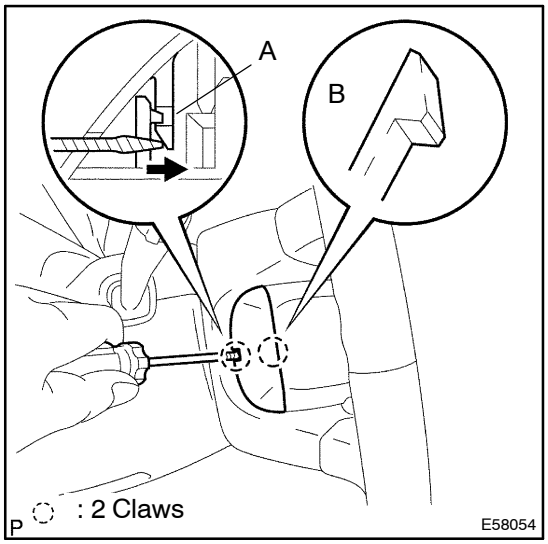

3. REMOVE CONNECTOR COVER


(a) Using a screwdriver, disengage the claw(A).

HINT:

Tape the screwdriver tip, before use.

(b) Disengage the claw(B) and remove the connector cover.

4. REMOVE HORN BUTTON ASSY

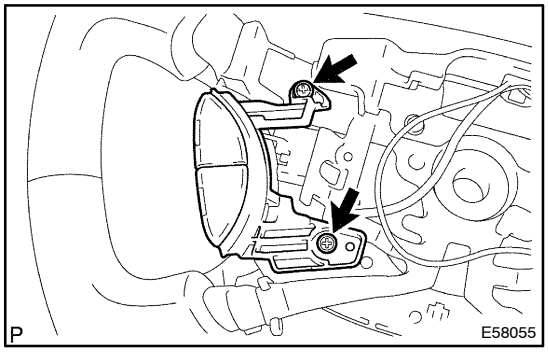

5. REMOVE STEERING PAD SWITCH

(a) Disconnect the connector.

(b) Remove the 2 screws and steering pad switch.

6. INSTALL HORN BUTTON ASSY
7. INSPECT HORN BUTTON ASSY
8. INSPECT SRS WARNING LIGHT