
COWL TOP SIDE REINFORCEMENT (ASSY)

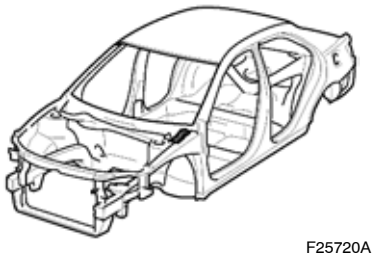


F25720A

Symbol meaning

REMOVAL	:	Cut with disc sander, etc.
INSTALLATION	:	Tack Weld

F25720B

REMOVAL·INSTALLATION

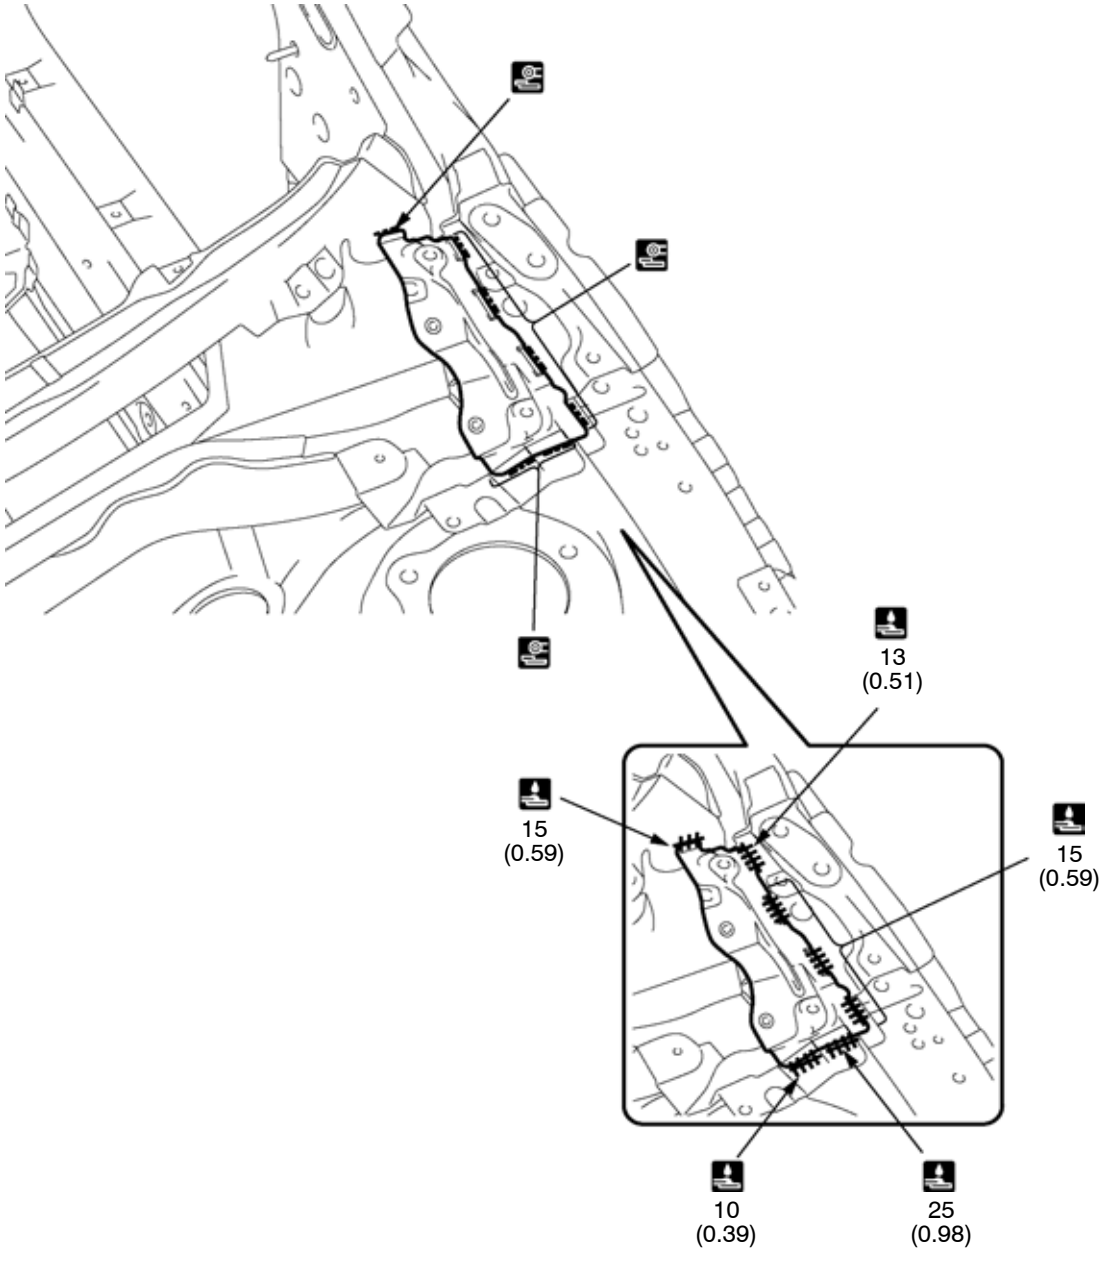

F25720

INSTALLATION POINT

1 After welding, apply body sealer to the corresponding parts. (See the paint·coating)
2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.