
COWL TOP OUTER PANEL (ASSY)

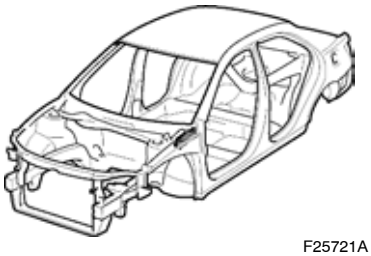

F25721A


With the cowl top side reinforcement and front body pillar lower gusset removed.

Symbol meaning

REMOVAL	: Remove Weld Points	: Cut with disc sander, etc.
INSTALLATION	: MIG Plug Weld	: Tack Weld

F25721B

REMOVAL·INSTALLATION

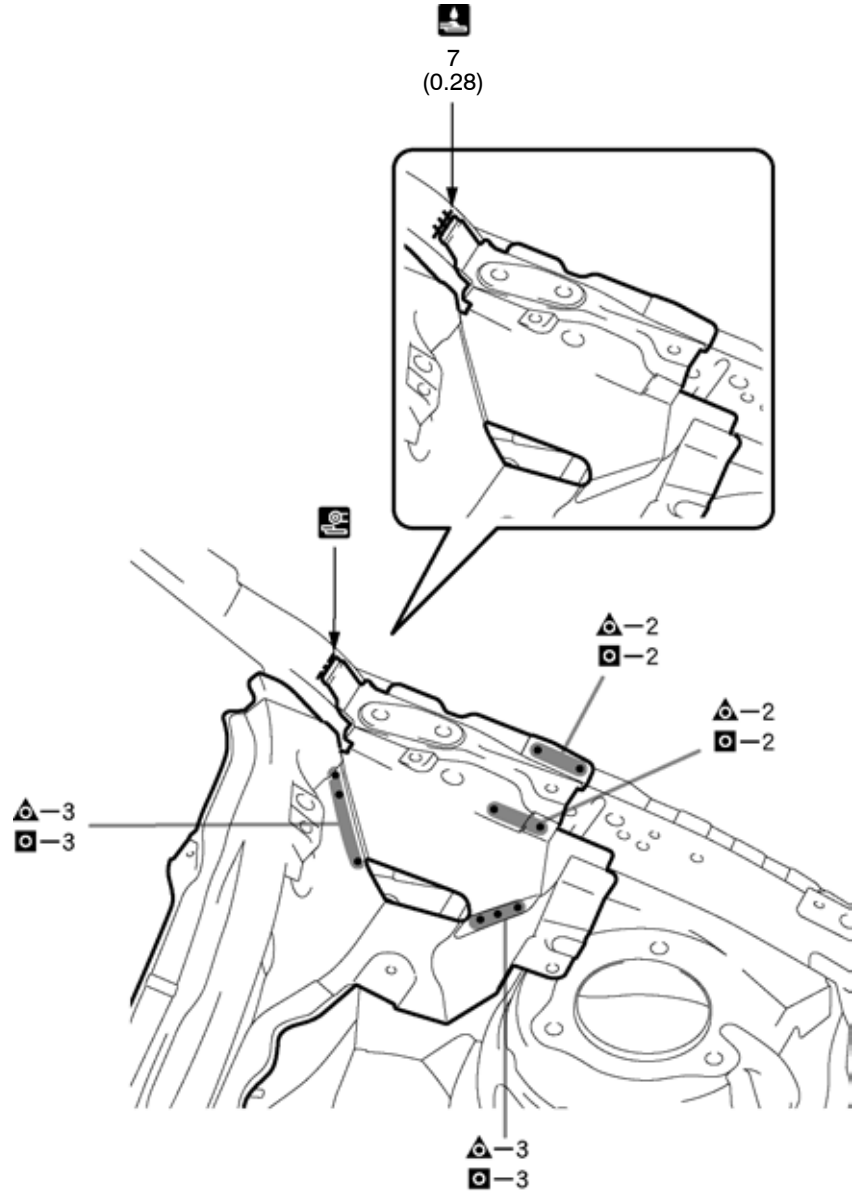

mm (in.)

F25721

INSTALLATION POINT

1 Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
2 After welding, apply body sealer to the corresponding parts. (See the paint·coating)
3 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.