REAR FLOOR SIDE PANEL (ASSY)



F25750A

With the rear floor pan removed.


Symbol meaning


REMOVAL	A A : Remove Weld Points
INSTALLATION	O I : MIG Plug Weld

F25750B

REMOVAL·INSTALLATION

[LH]

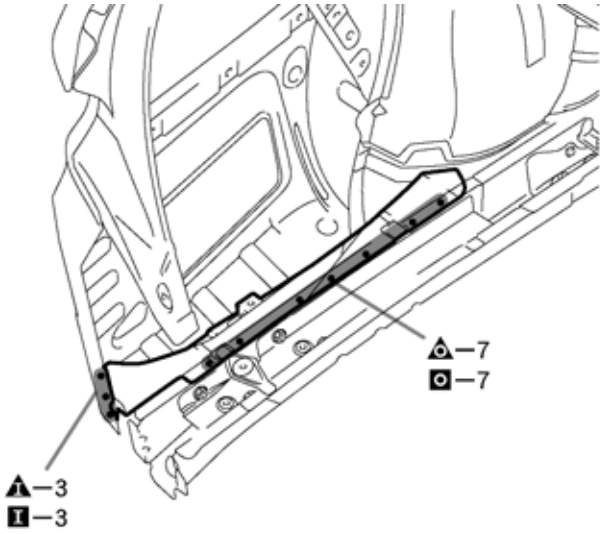

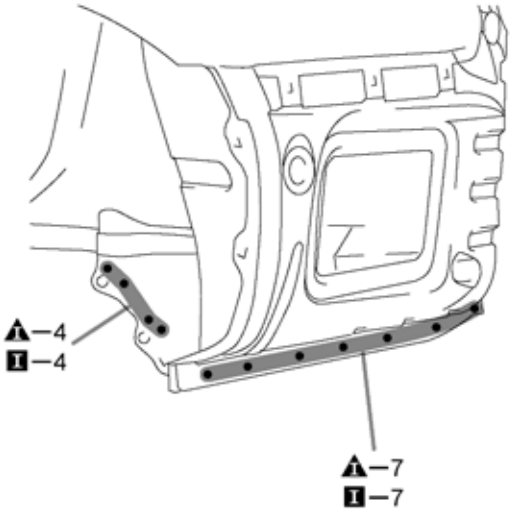

F25750

INSTALLATION POINT


1 After welding, apply body sealer and undercoating to the corresponding parts. (See the paint·coating)
2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.


Symbol meaning

REMOVAL	▲ ▲ : Remove Weld Points
INSTALLATION	■ I : MIG Plug Weld

F25750B

[RH]

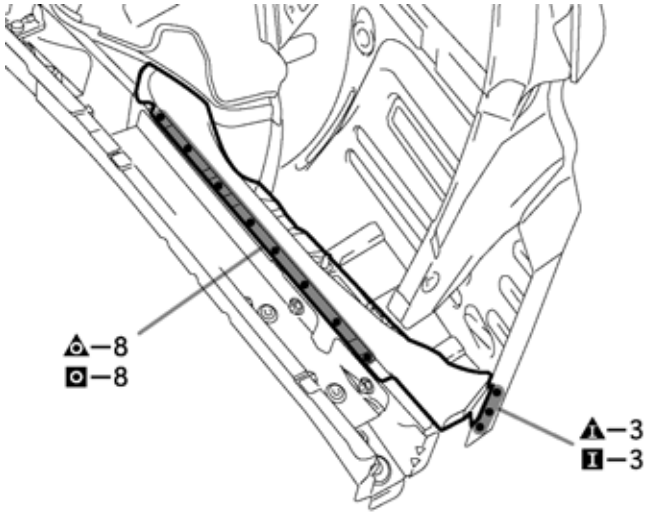

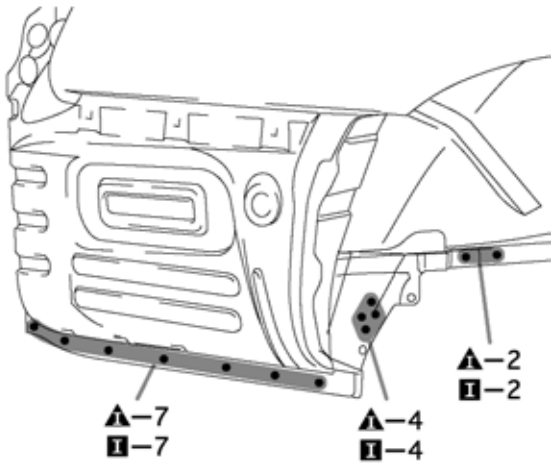

F26463

INSTALLATION POINT

1 After welding, apply body sealer and undercoating to the corresponding parts. (See the paint·coating)
2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.