

Welcome Function


When the driver starts the engine, the graduated illumination sequence of the combination meter, audio and heater control panel gives the impression of the driver being welcomed aboard. This function is available only for models with the optitron display type combination meter with multi-information display.


(1) 0.7 seconds after engine start

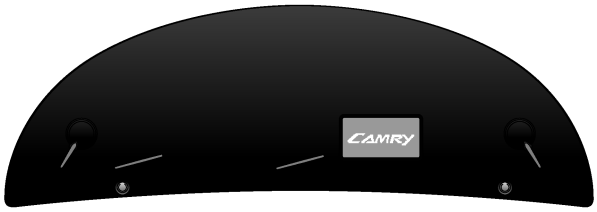

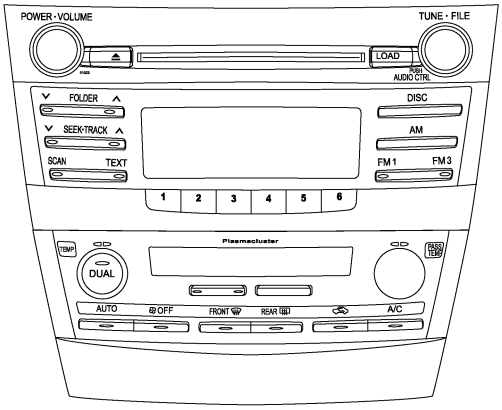


(2) Approximately 2 seconds after engine start

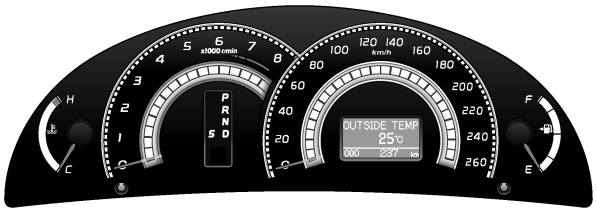


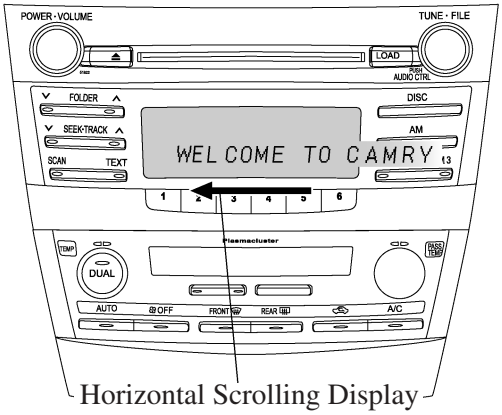

Horizontal Scrolling Display

(3) Approximately 3 seconds after engine start

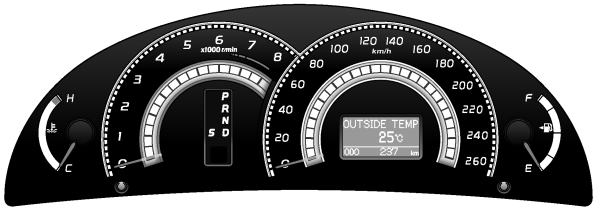

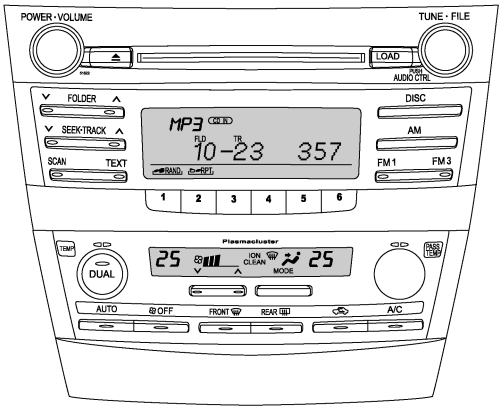

02KMO37Y