
■ AERODYNAMICS

To improve aerodynamic performance, the following measures have been taken.

- Rear fairings are provided to smooth out the airflow around the tires and reduce the air resistance while the vehicle is in motion.



- The engine undercover has been formed into a step shape to increase the velocity of the air flowing underneath the vehicle. This creates a vacuum and suppresses the lift force, thus, excellent maneuverability and stability have been achieved.

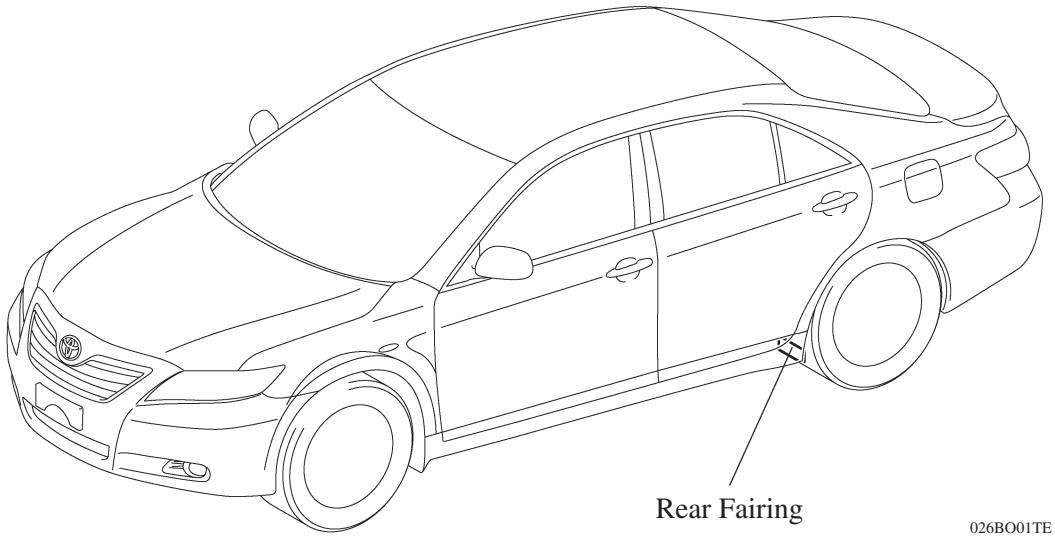