
FRONT SIDE MEMBER (CUT-H)

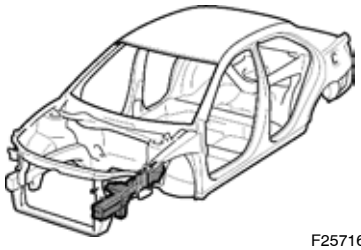

F25716A


With the front fender apron removed.


Symbol meaning


: Remove Weld Points

F25716B

REMOVAL

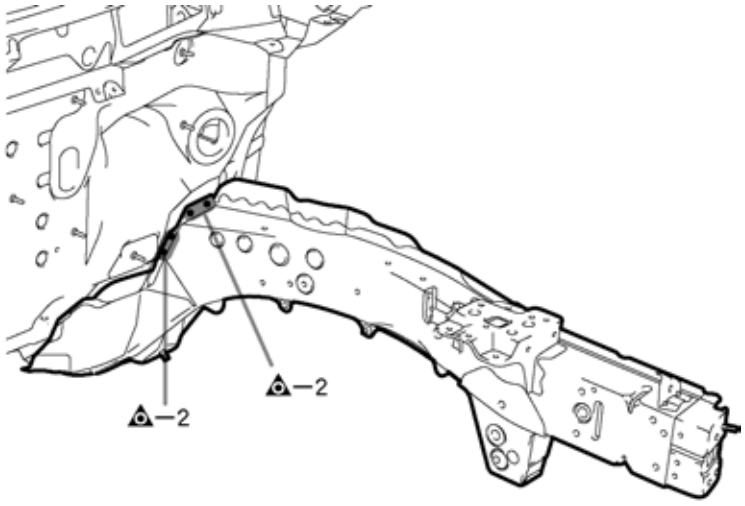

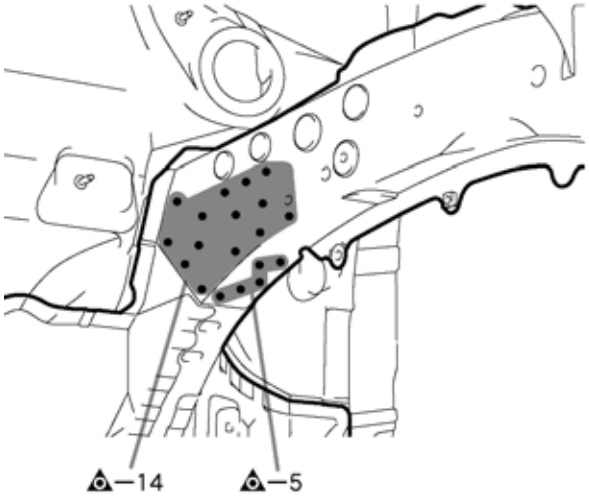

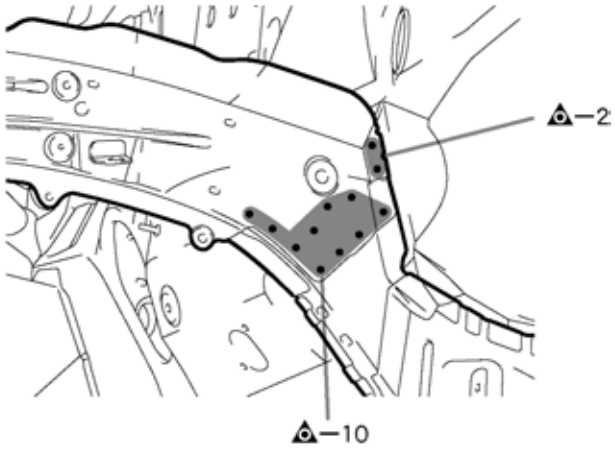


F25716


Symbol meaning


: MIG Plug Weld


F25718B

INSTALLATION

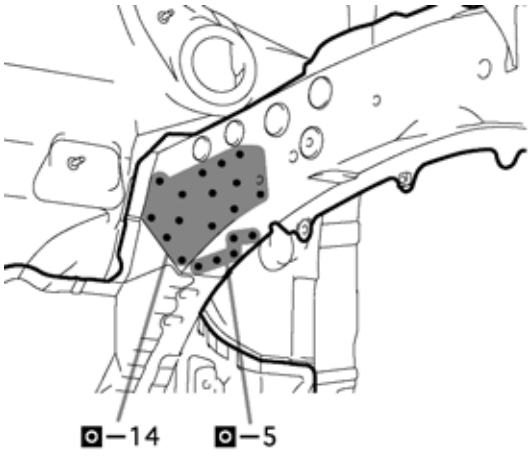

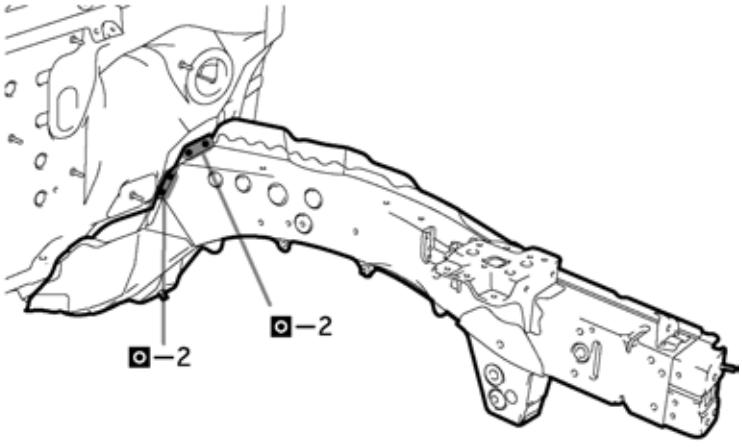

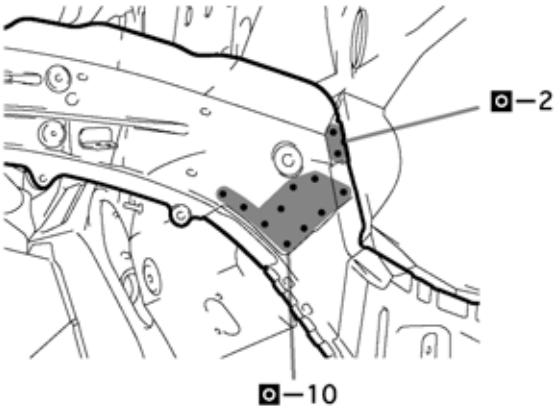

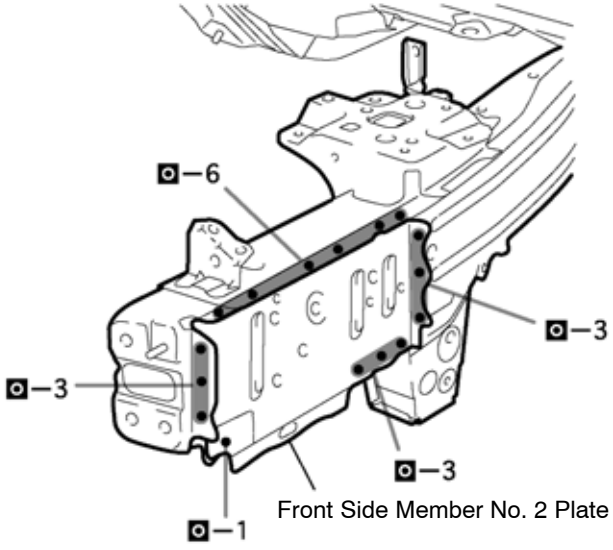

CAUTION

Make sure to attach correctly in accordance with the body dimension diagram as this part affects the front wheel alignment.

F26451

INSTALLATION POINT

1 Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
2 After welding, apply body sealer and undercoating to the corresponding parts. (See the paint·coating)
3 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.