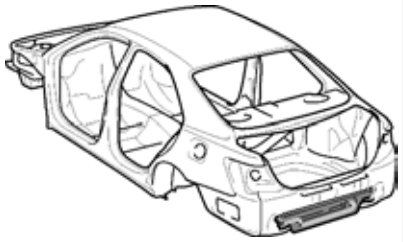
REAR FLOOR NO. 3 CROSSMEMBER (ASSY)


F25746A


With the body lower back panel removed.

Symbol meaning

REMOVAL	▲ : Remove Weld Points	
INSTALLATION	⊙ : Spot Weld	◘ : MIG Plug Weld

F25746B

REMOVAL·INSTALLATION

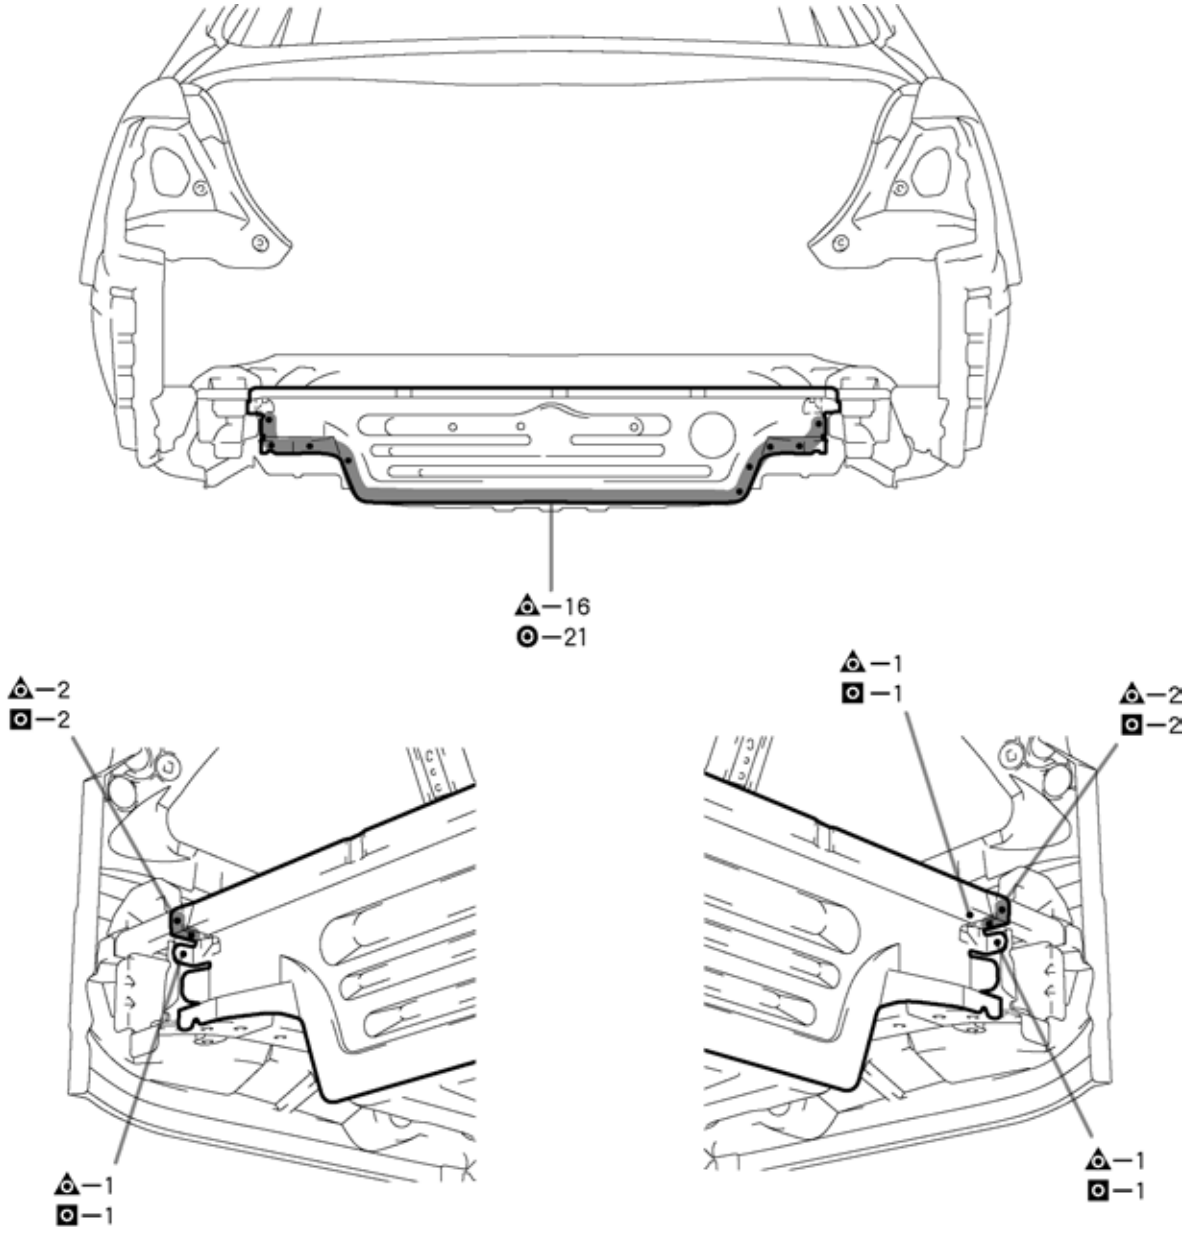

F25746

INSTALLATION POINT

1 Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
2 After welding, apply body sealer and undercoating to the corresponding parts. (See the paint·coating)
3 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.