


LOWER VALVE BODY

LOCATION COMPONENTS

AX0BB-02

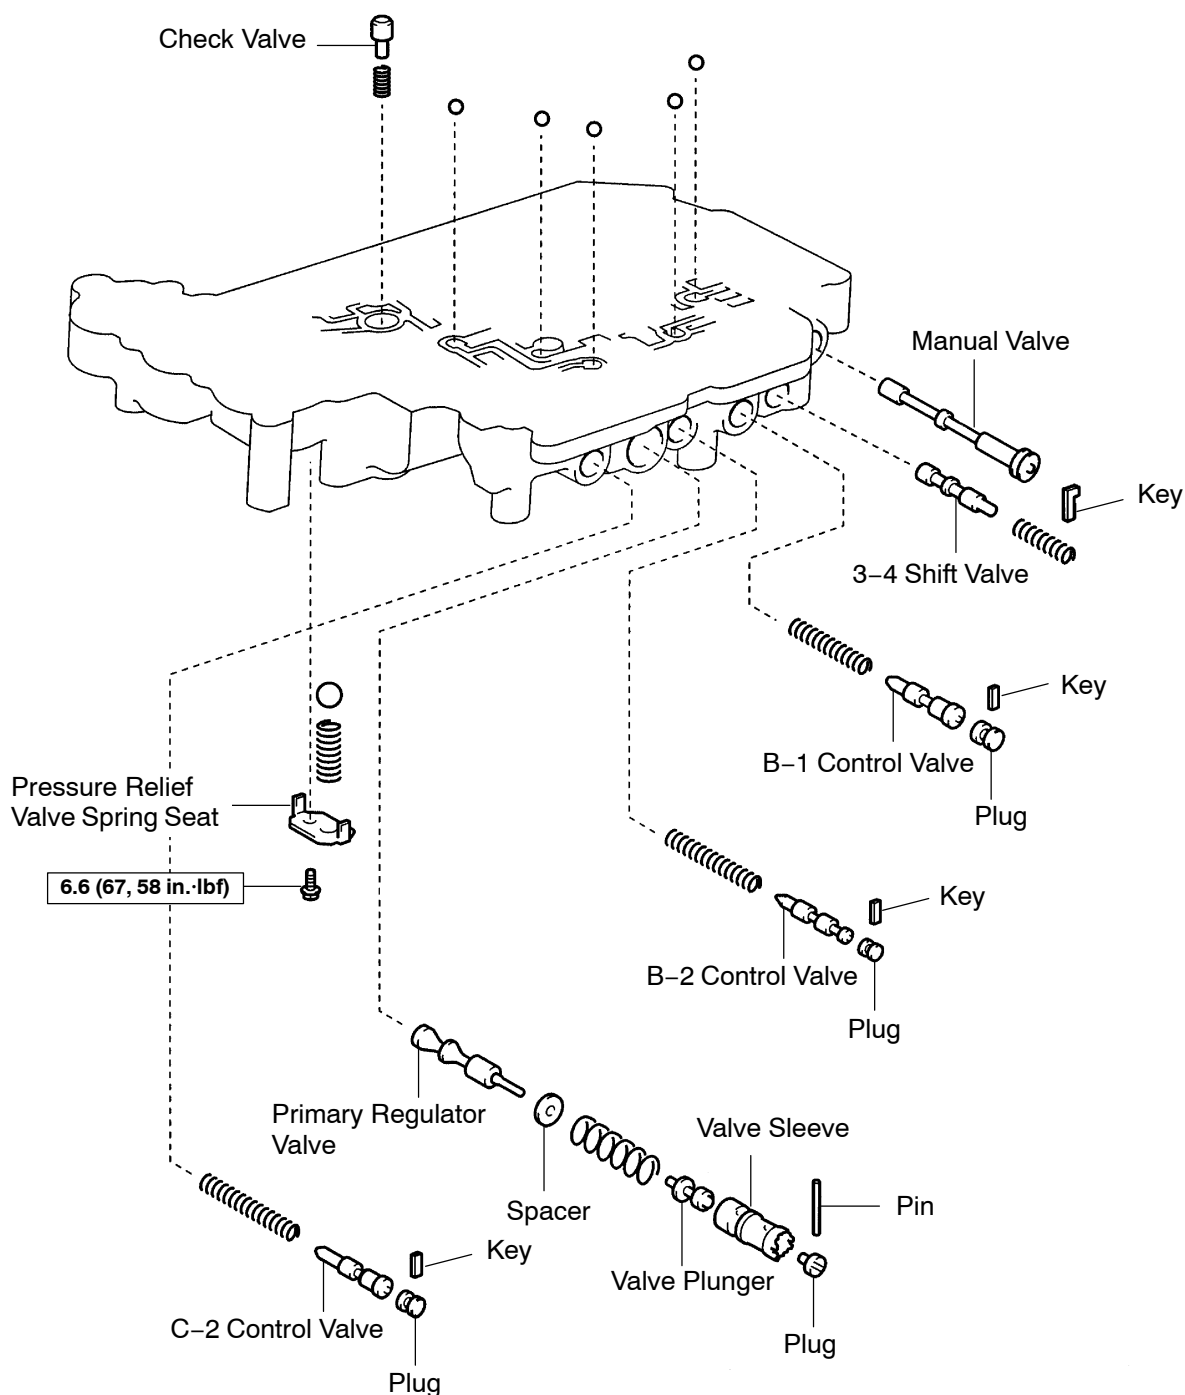


N·m (kgf·cm, ft·lbf) : Specified torque

D08143

SPRING**HINT:**


During reassembly, please refer to the spring specifications below to help you differentiate among the different springs.

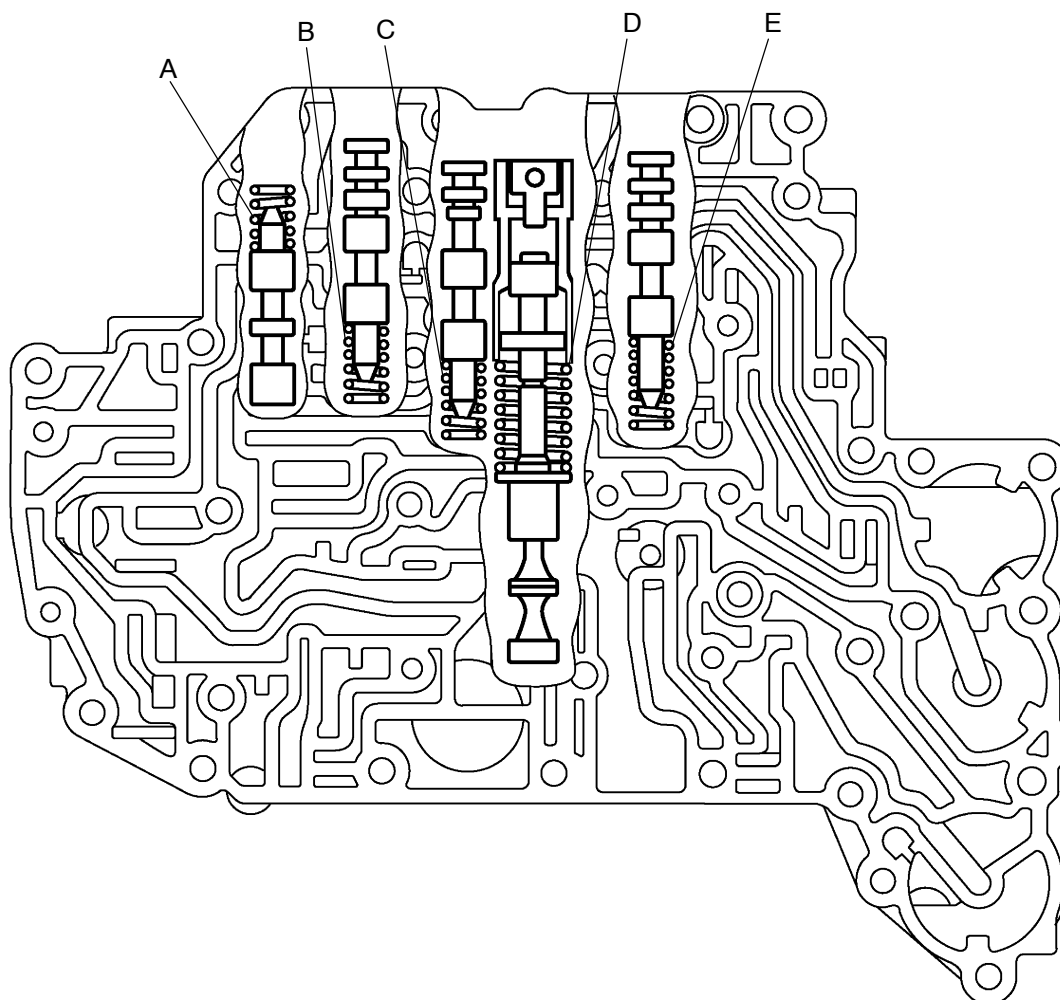

D03836

Mark	Name (Color)	Free length / Outer diameter mm (in.)	Total number of coils
A	3-4 shift valve (None)	29.25 (1.1516) / 9.7 (0.382)	10.5
B	B-1 control valve (Green)	48.57 (1.9122) / 9.8 (0.386)	13.43
C	B-2 control valve (Pink)	57.08 (2.2472) / 9.8 (0.386)	15.34
D	Primary regulator valve (Orange)	57.58 (2.2669) / 19.9 (0.783)	7.87
E	C-2 control valve (Brown)	34.19 (1.3461) / 9.9 (0.390)	8.79


KEY

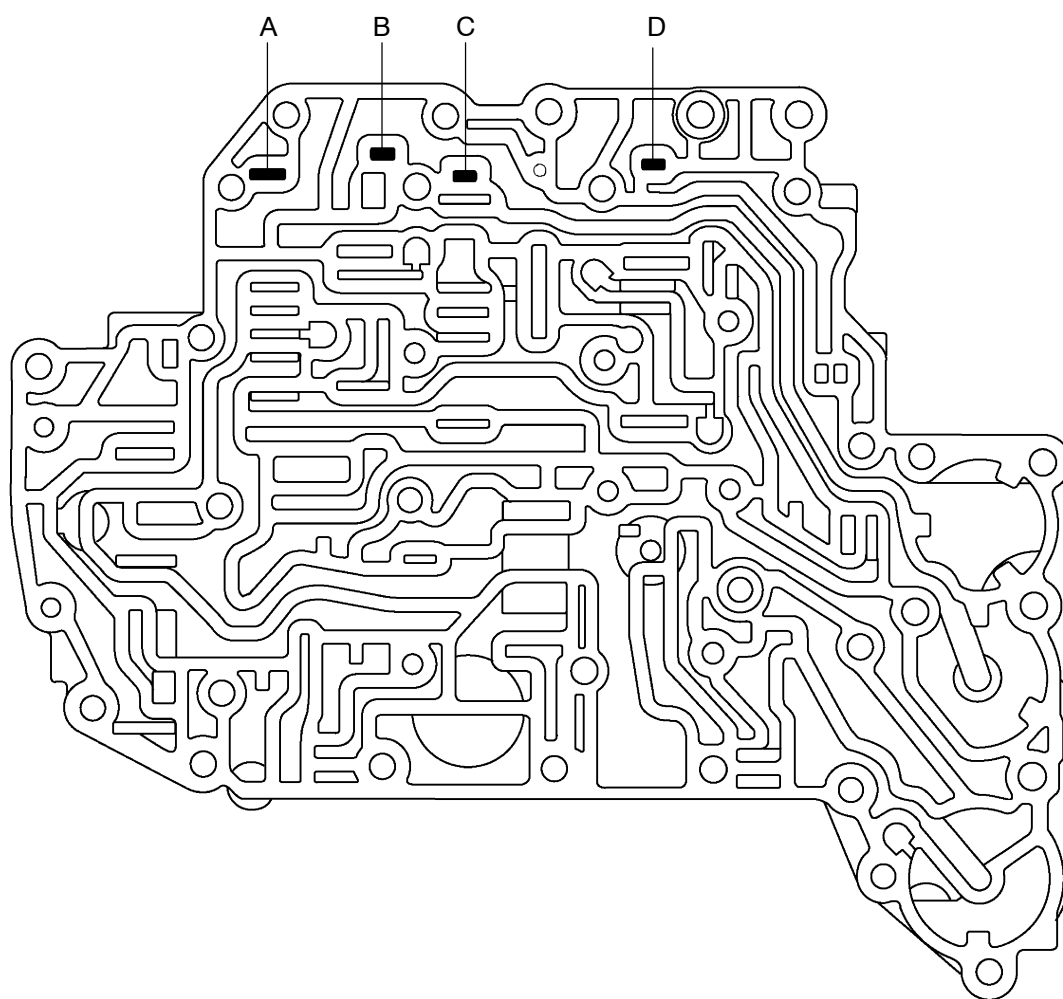

D03837

Mark	Retainer	Height / Width / Thickness	
		mm (in.)	
A	3-4 shift valve	25.5 (1.004) / - / 2.3 (0.091)	
B	B-1 control valve	14.5 (0.571) / 5.0 (0.197) / 3.2 (0.126)	
C	B-2 control valve	14.5 (0.571) / 5.0 (0.197) / 3.2 (0.126)	
D	C-2 control valve	14.5 (0.571) / 5.0 (0.197) / 3.2 (0.126)	

CHECK BALL

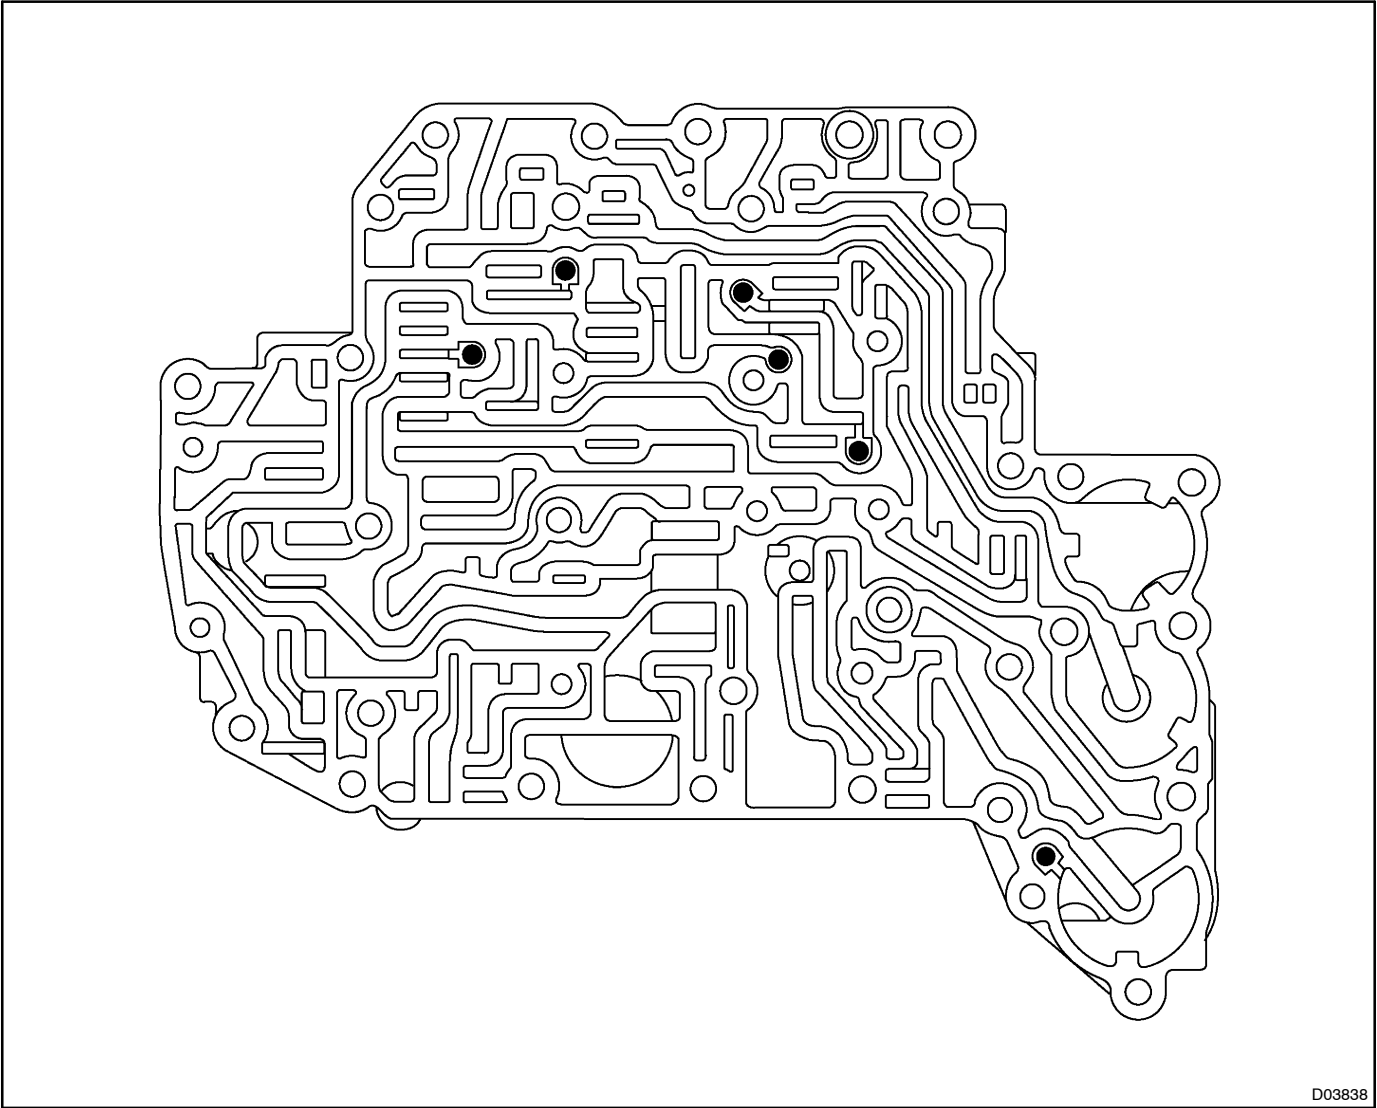

D03838

Check ball	mm (in.)	5.5 (0.217)
------------	----------	-------------