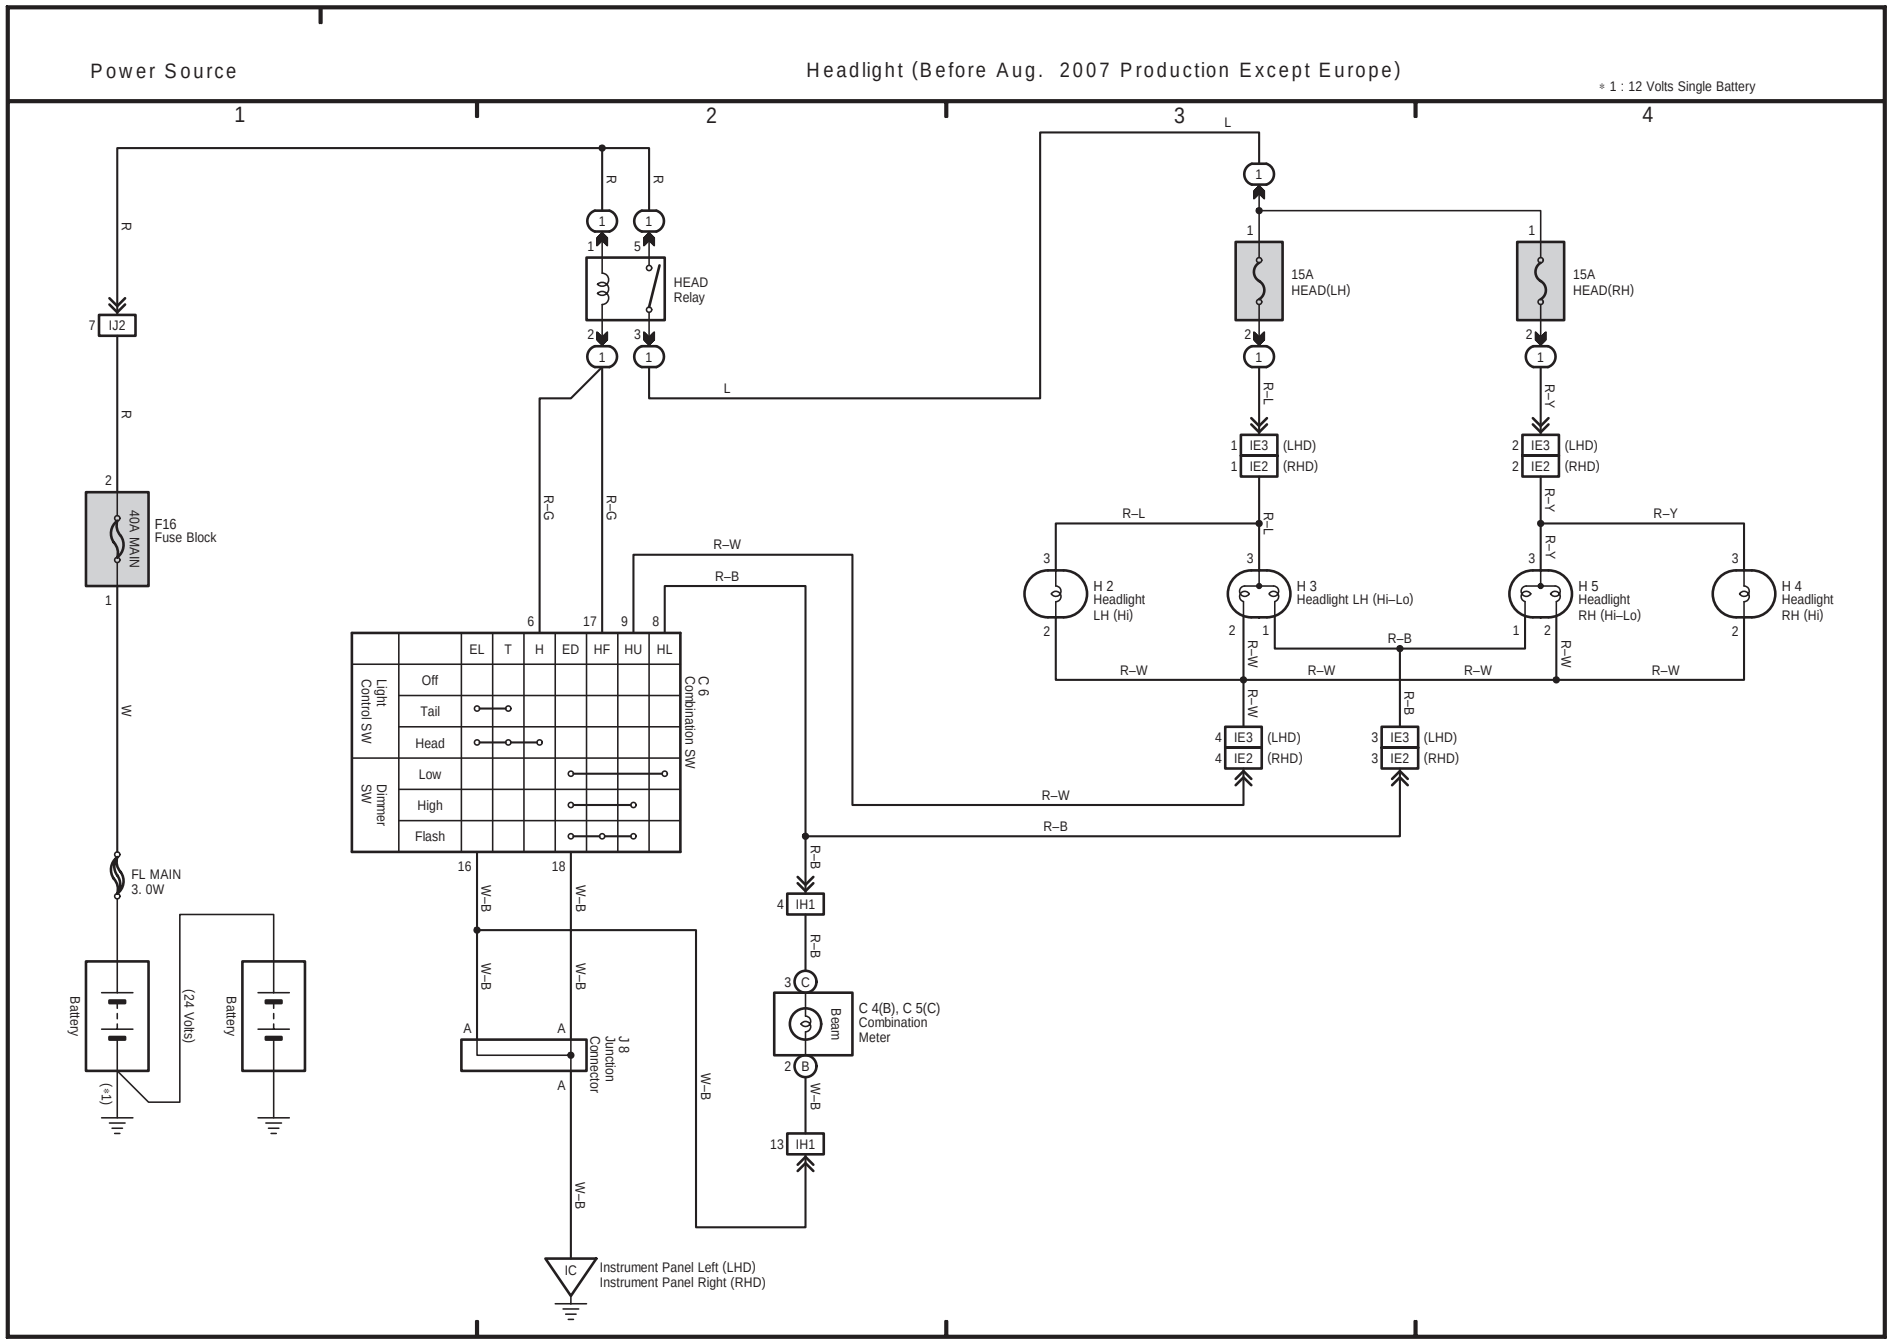

Power Source
Headlight (Before Aug. 2007 Production Except Europe)
* 1 : 12 Volts Single Battery
1
2
3
4
HEAD Relay
15A HEAD(LH)
15A HEAD(RH)
IJ2
F16 Fuse Block
40A MAIN
FL MAIN 3. 0W
Battery
Battery
(24 Volts)
(*1)
C 6 Combination SW
EL
T
H
ED
HF
HU
HL
Light Control SW
Off
Tail
Head
Dimmer SW
Low
High
Flash
J 8 Junction Connector
C 4(B), C 5(C) Combination Meter
Beam
IE3 (LHD)
IE2 (RHD)
H 2 Headlight LH (Hi)
H 3 Headlight LH (Hi–Lo)
H 5 Headlight RH (Hi–Lo)
H 4 Headlight RH (Hi)
IH1
IC
Instrument Panel Left (LHD)
Instrument Panel Right (RHD)
R
L
W
R–G
R–W
R–B
R–L
R–Y
W–B