
■ WAX AND SEALER

To improve rust resistance, wax and sealer have been applied to the areas shown, which include under the doors, around hinges, and at the joints between panels, and hemmed portions.

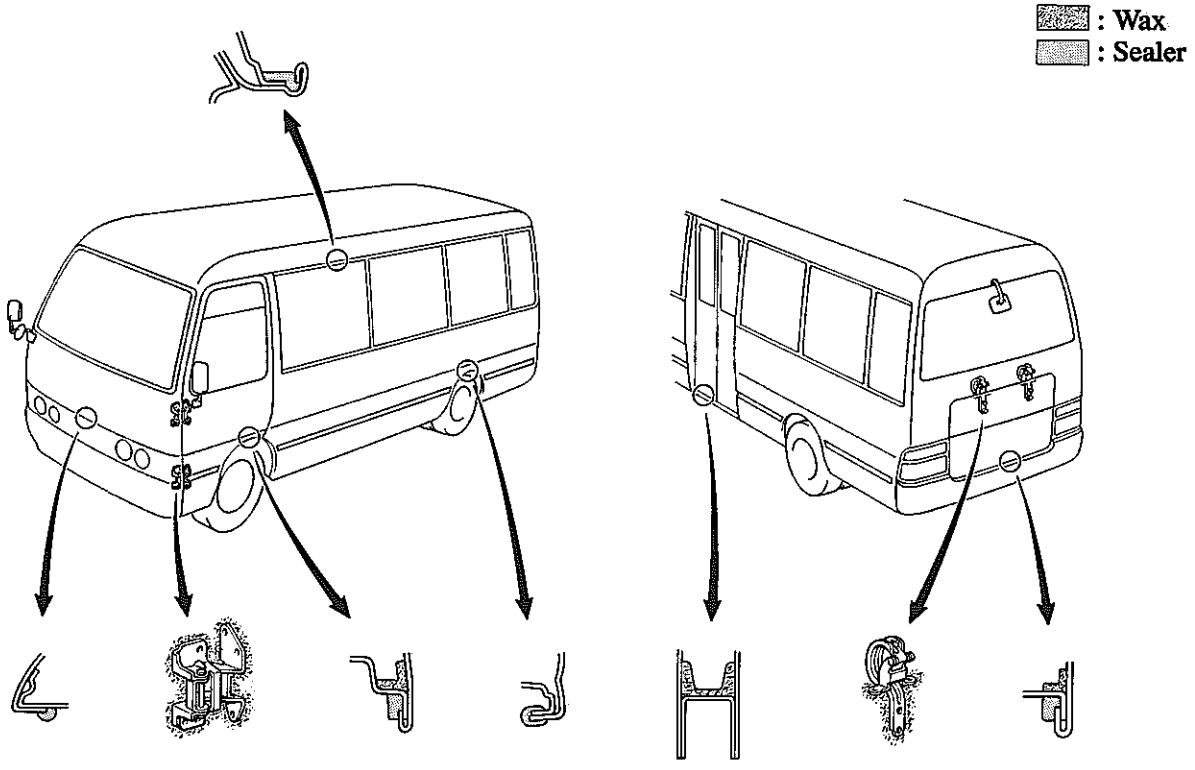

■ UNDER COAT

The under body is coated with Vinyl Chloride Plastisol to a thickness of 0.5 mm (0.019 in.) over the entire area and 1.0 mm (0.039 in.) at panel joints to improve resistance to corrosion.

0.5 mm (0.019 in.) Coating is Applied
1.0 mm (0.039 in.) Coating is Applied

