
LOW VIBRATION, LOW NOISE BODY

■ DESCRIPTION

A low-vibration and low-noise body has been realized through the use of asphalt sheet, floating type rubber body mountings for G. C. C. countries, and the double-wall engine service hole cover.

■ ASPHALT SHEET


Asphalt sheeting is applied to most of the front floor area to reduce noise and vibration.

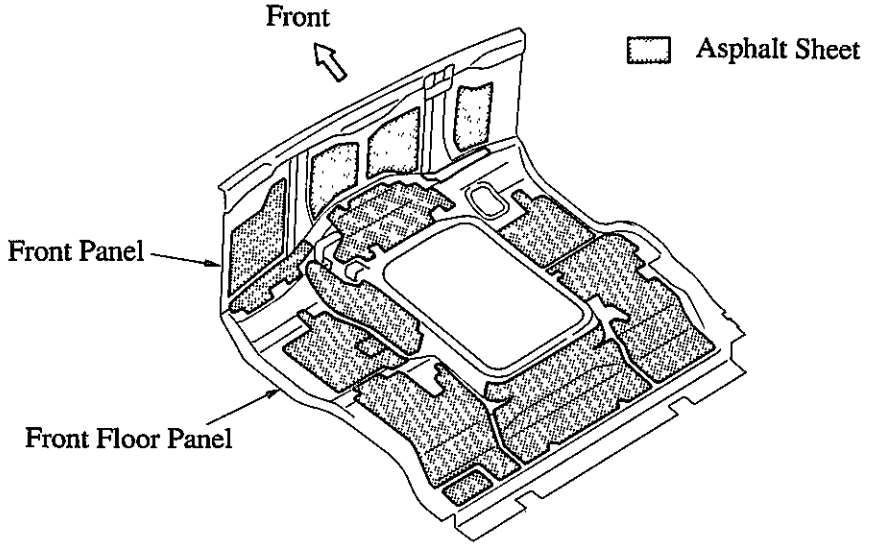

For RHD Model


■ ENGINE SERVICE HOLE COVER

The engine service hole cover has been changed from single plywood to a double-walled steel cover, to improve insulation of the engine noise.

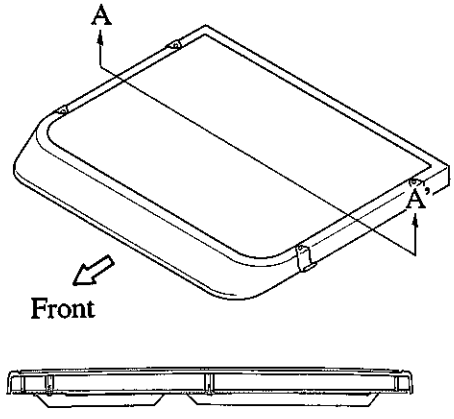

A–A' Cross Section

New

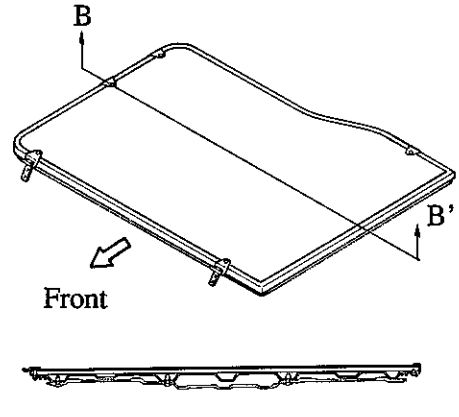

B–B' Cross Section

Previous