

15. Seat

- The sixth-row 2-seater separate seat has been changed to the 2-seater bench seat on the Australia models.

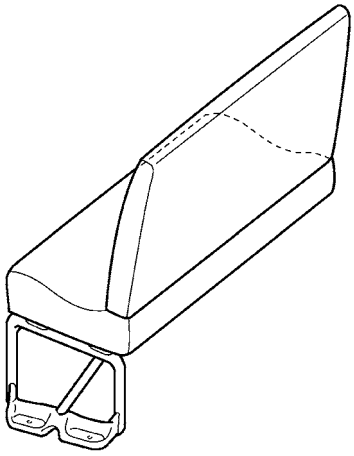

047BO008Y


New

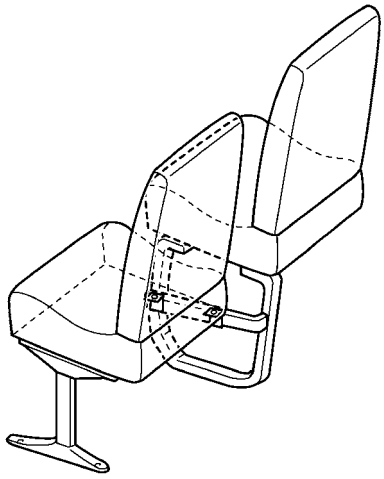

047BO009Y


Previous

- The second- to seventh-row 2-seater seats use frame type seat legs on the Australia models.



047BO010Y

Seat Leg for Second-, Third-, Fourth-, and Seventh-row 2-seater Seats




047BO011Y

Seat Leg for Fifth- and Sixth-row 2-seater Seats

- The positions of the passenger seats have been changed on the standard grade of the Hong Kong models. The shifted distance of each seat is as follows:


▶ Standard Wheel Base Models ◀

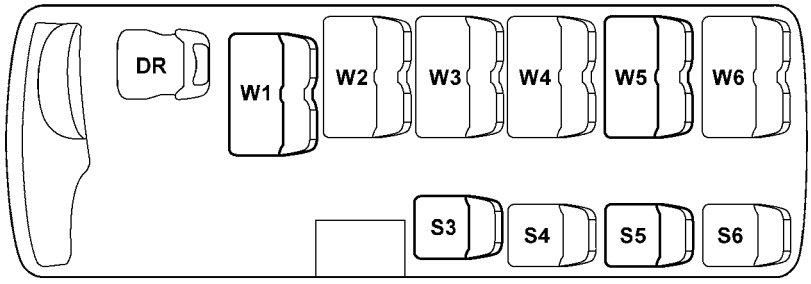

047BO012Y

Seat	Lateral Shifted Distance (to Center)	Vertical Shifted Distance (Upward)
W1	96 mm (3.8 in.)	32 mm (1.3 in.)
S3	49 mm (1.9 in.)	—
W5, S5	—	70 mm (2.8 in.)

▶ Long Wheel Base Models ◀

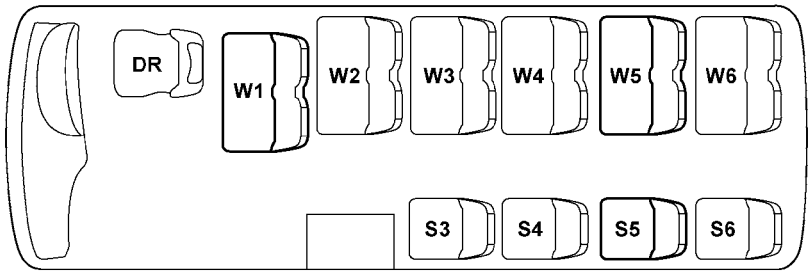


047BO013Y

Seat	Lateral Shifted Distance (to Center)	Vertical Shifted Distance (Upward)
W1	96 mm (3.8 in.)	32 mm (1.3 in.)
W5, S5	—	70 mm (2.8 in.)

- Several passenger seats have been changed to the semi high back seats on the standard grade of the Australia models.

: Semi High Back Passenger Seats

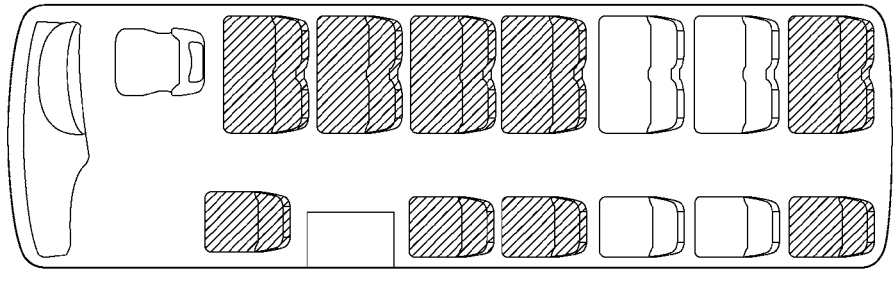

047BO014Y

- A headrest for the driver seat is provided as standard equipment for the general countries models.