
FRONT AXLE

DESCRIPTION

SADWM-01

Tapered roller bearings are used for the wheel bearings.
The preload of the bearing can be determined only by tightening the axle hub nut to a specified torque, improving serviceability.
The brake drum or disc rotor are integrated with the axle hub to reduce the overall weight.

(w/ Drum Brake)

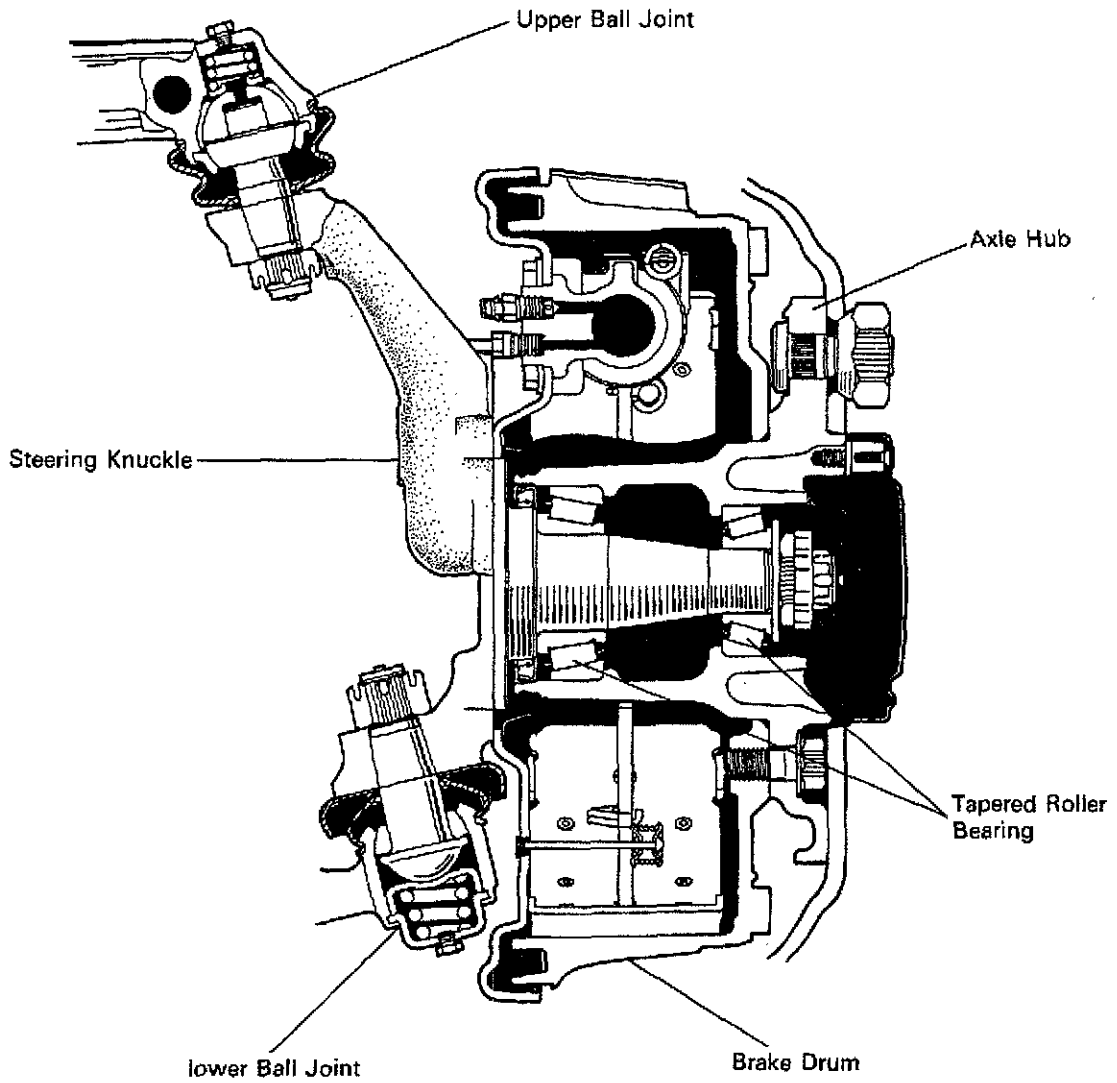

R06487