
AC3MM–01

REMOVAL

1. DISCHARGE REFRIGERANT FROM REFRIGERATION SYSTEM

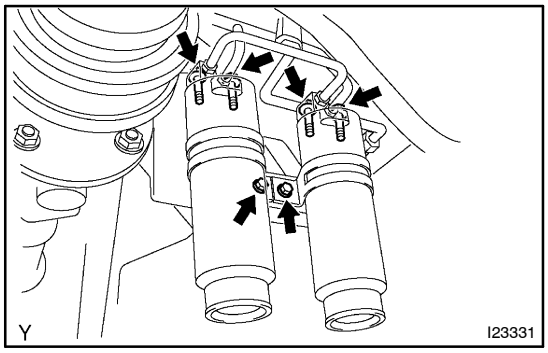

2. DISCONNECT LIQUID TUBES

Remove the 4 bolts and disconnect the 4 liquid tubes from the receiver.

NOTICE:

Cap the open fittings immediately to keep moisture or dirt out of the system.

3. REMOVE RECEIVERS

Remove the 2 bolts and 2 receivers from the receiver holder.