

AXLES

■FRONT AXLE

- Large-capacity type tapered roller bearings were installed in the wheel bearings.
- The minimum turning radius of rigid-suspension models was reduced and superior handling characteristics were secured by optimally arranging the steering gear and steering knuckle.

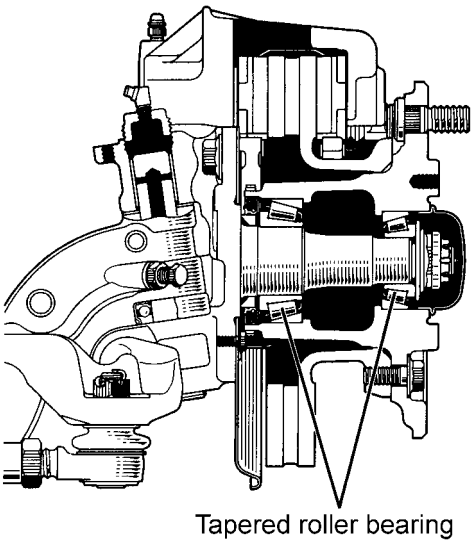

with Disc brake

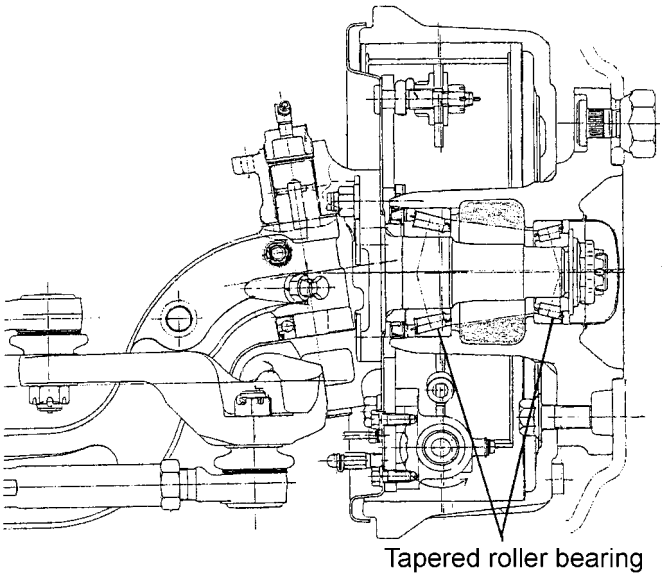

with Drum brake

▶ Specifications ◀

Cab Type	GVMR	No. of hub bolt	Brake type			Model
			Disc	Drum	with ABS	
Regular	5.5 ton	5	○		○	BU300, BU303, BU340, BU343, WU300, WU340
	6.5 ton		○			
	8 ton	6		○		
Wide	5.5 ton	5	○		○	XZU412, XZU414
				○		
	6.5, 7.5, 8.5 ton	6		○		XZU412, XZU414, XZU422, XZU424, XZU434, WU410
				○	○	