
DIFFERENTIAL OIL

REPLACEMENT

2907M–01

1. DRAIN DIFFERENTIAL OIL

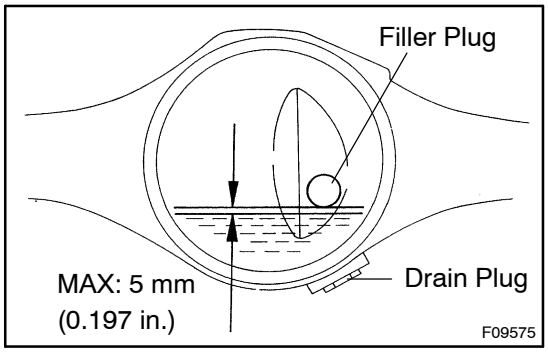

2. ADD DIFFERENTIAL OIL

Oil type: Hypoid gear oil API GL–5

Recommended oil viscosity: SAE 90

Capacity:

Differential Type	litters (US qts, Imp. qts)
B265	3.4 (3.6, 3.0)
B305	5.2 (5.5, 4.8)
SH13	3.7 (3.9, 3.4)

Torque for drain and filler plugs:

Differential Type	N·m (kgf·cm, ft·lbf)
B265	50 (510, 37)
B305	
SH13	98 (1000, 72)