AIR CONDENSOR AMPLIFIER ASSY


REPLACEMENT

550WS–01

HINT:


The installation is in the reverse order of the removal. However, when there is a special point concerning the installation, it is indicated.

1. **REMOVE STEERING COLUMN ASSY (See page 50–8)**
2. **REMOVE INSTRUMENT PANEL SUB–ASSY (See page 71–11 or 71–17)**

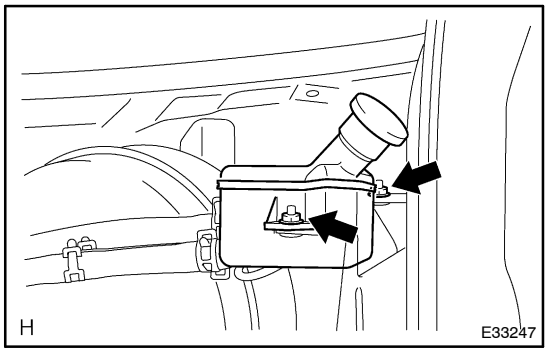


3. **REMOVE BRAKE MASTER CYLINDER RESERVOIR SUB–ASSY**

(a) Remove the 2 nuts and disconnect bracket master cylinder reservoir.

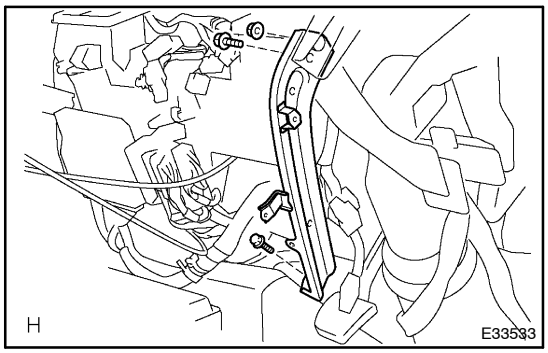


4. **REMOVE INSTRUMENT PANEL BRACE SUB–ASSY NO.1**

(a) Remove the 2 bolts, nut and instrument panel brace.

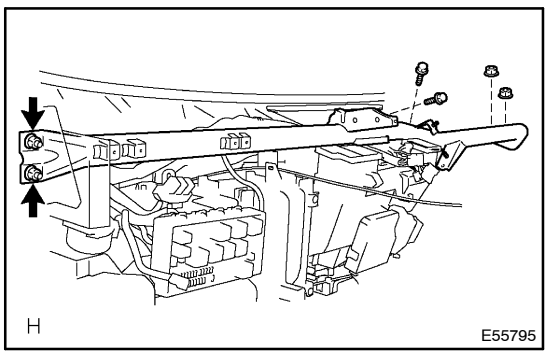


5. **REMOVE INSTRUMENT PANEL REINFORCEMENT**

(a) Remove the 2 bolts, 4 nuts and instrument panel reinforcement.

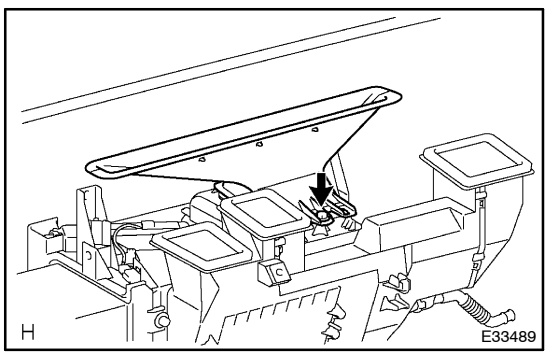

6. **REMOVE DEFROSTER NOZZLE ASSY LWR**

(a) Remove the screw and defroster nozzle assy LWR.

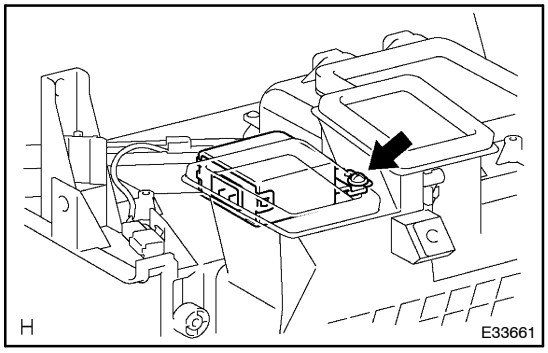

7. REMOVE AIRCONDITIONER AMPLIFIER SUB–ASSY

(a) Remove the screw and amplifier.

8. INSTALL AIRCONDITIONER AMPLIFIER SUB–ASSY

(a) Install the amplifier with the screw.

9. INSTALL DEFROSTER NOZZLE ASSY LWR

10. INSTALL INSTRUMENT PANEL REINFORCEMENT

11. INSTALL INSTRUMENT PANEL BRACE SUB–ASSY NO.1

12. INSTALL BRAKE MASTER CYLINDER RESERVOIR SUB–ASSY

13. INSTALL INSTRUMENT PANEL SUB–ASSY (See page 71–11 or 71–17)

14. INSTALL STEERING COLUMN ASSY (See page 50–8)