RADIO RECEIVER ASSY


REPLACEMENT

670BR–02

HINT:

- COMPONENTS: See page 67–1
- The installation is in the reverse order of the removal.


1. REMOVE INSTRUMENT CLUSTER FINISH PANEL (See page 71–11 or 71–17)

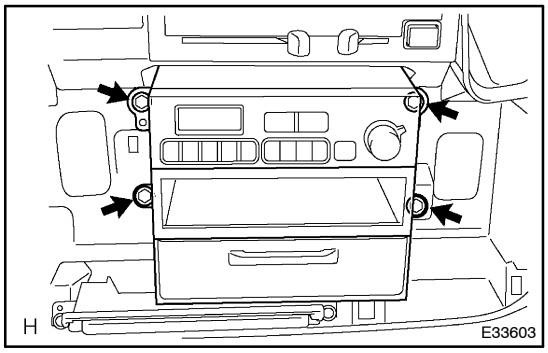

2. REMOVE RADIO RECEIVER ASSY


(a) Remove the 4 bolts.

(b) Disconnect the connector and remove the radio receiver.

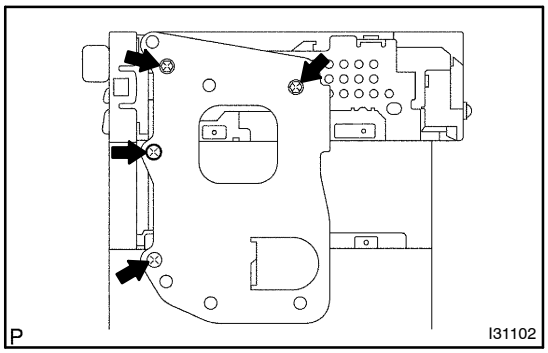

3. REMOVE RADIO BRACKET NO.1

(a) Remove the 4 screws and radio bracket No. 1.

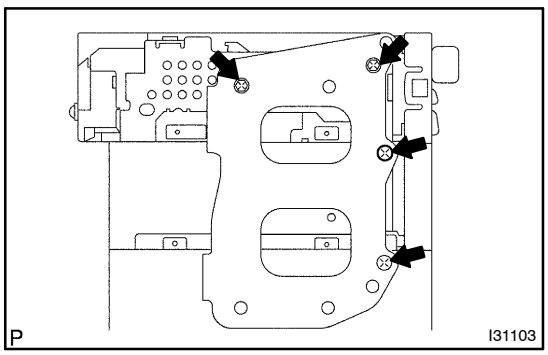

4. REMOVE RADIO BRACKET NO.2

(a) Remove the 4 screws and radio bracket No. 2.