ANTENNA ASSY

REPLACEMENT

670BT–02

HINT:

- COMPONENTS: See page 67–1
- The installation is in the reverse order of the removal. However, when there is a special point concerning the installation, it is indicated.

1. REMOVE RADIO RECEIVER ASSY (See page 67–2)

(a) Remove the instrument cluster panel sub–assy center.

(b) Remove the radio receiver assy.

2. REMOVE HEATER OR BOOST VENTILATOR CONTROL ASSY (W/ HEATER) (See page 71–11 or 71–17)

(a) Remove the heater control lever knob.


(b) Remove the heater control name plate.

(c) Remove the heater or boost ventilator control assy.

3. REMOVE COMBINATION METER ASSY (See page 71–11 or 71–17)


(a) Remove the instrument cluster finish panel.

(b) Remove the combination meter assy.

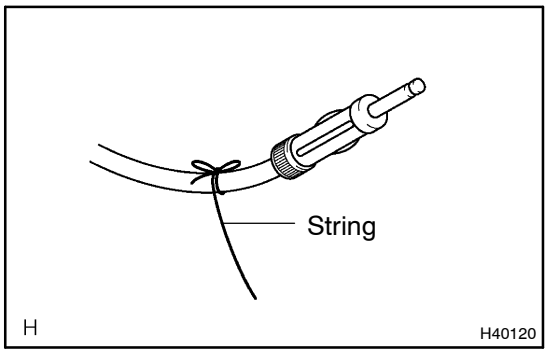


4. REMOVE ANTENNA ASSY


(a) Tie a string at the tip of the cable of the antenna.

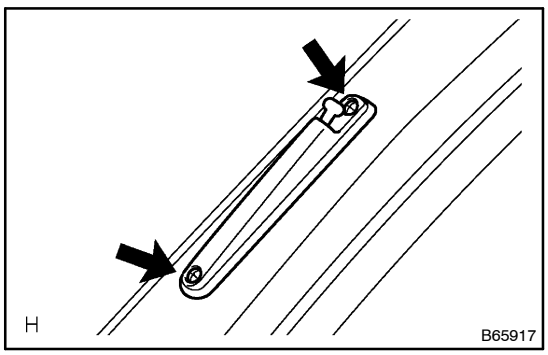

(b) Remove the 2 screws.

(c) Remove the antenna.

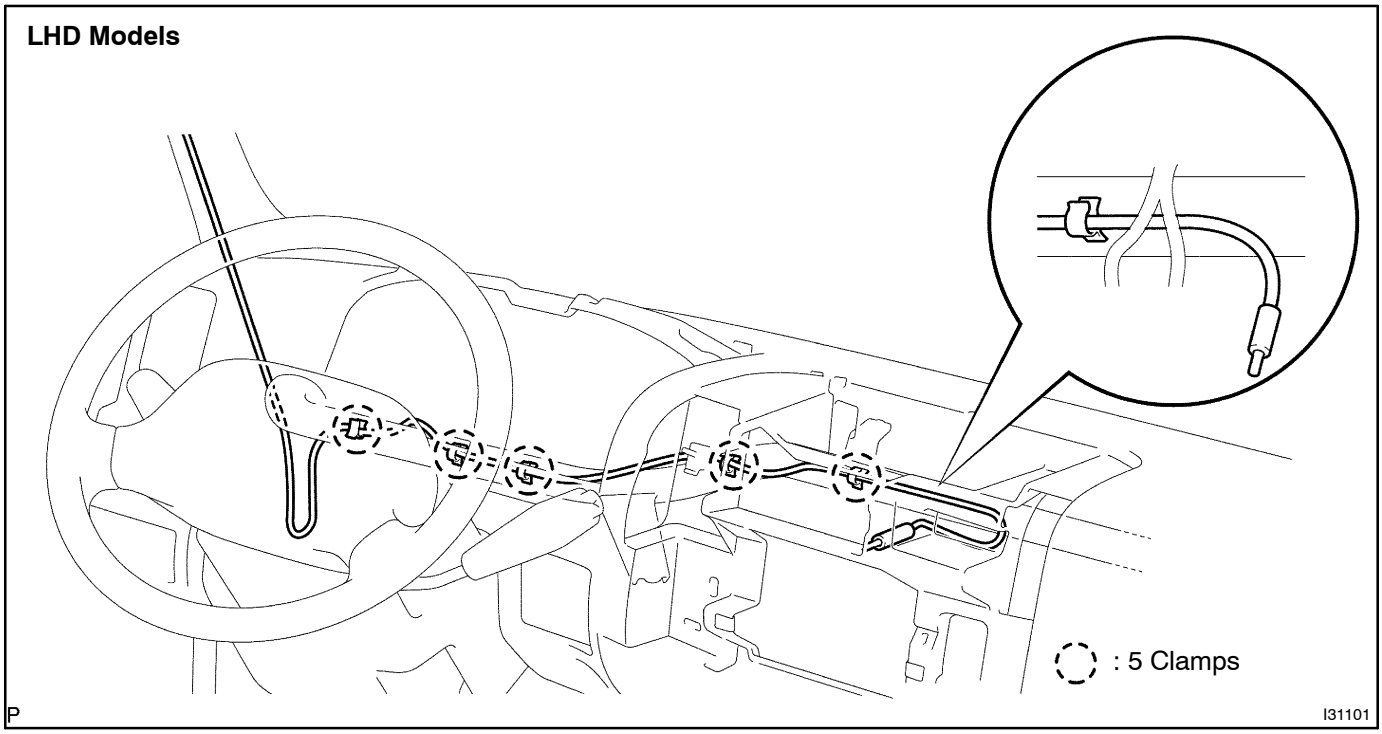

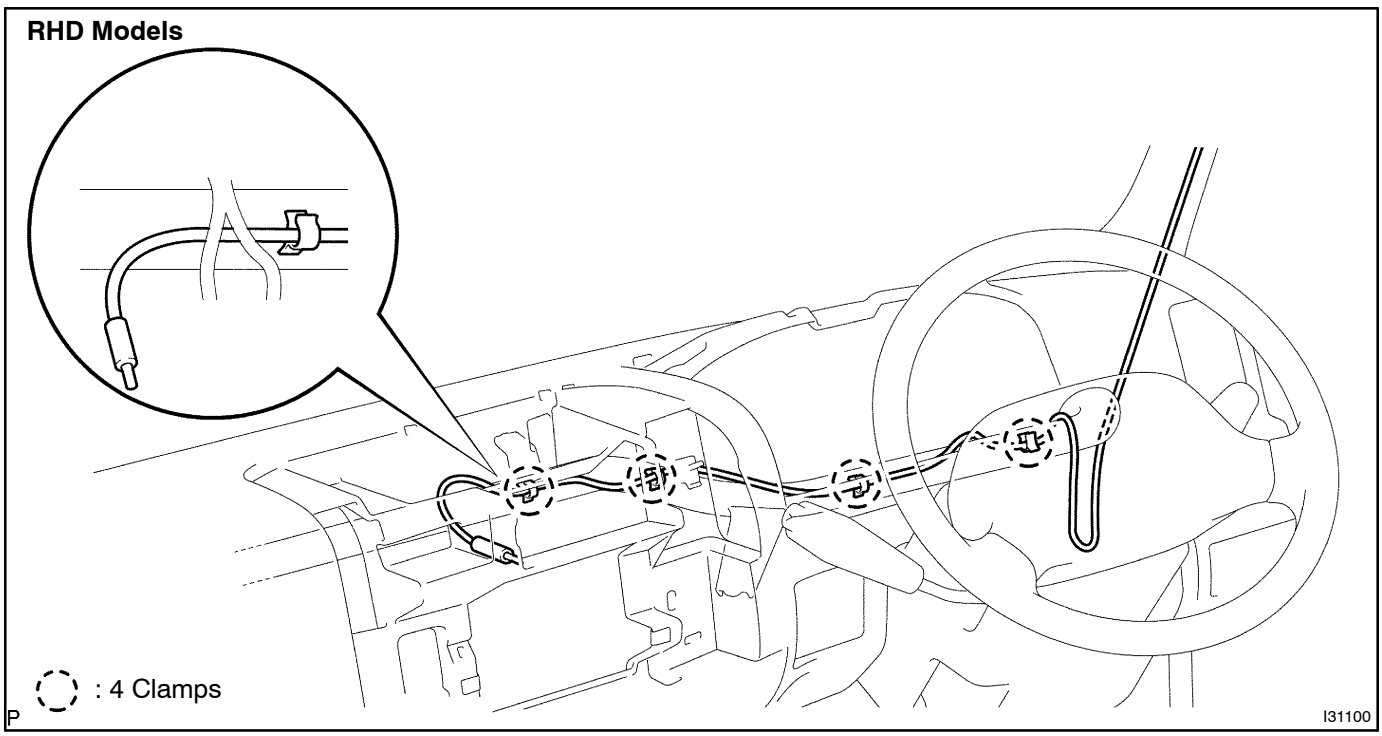

5. INSTALL ANTENNA ASSY

(a) Use a string to put the cable of the antenna.

(b) Install the antenna with the 2 screws and engage the clamps.