
INNER REAR VIEW MIRROR ASSY

700RD–01

REPLACEMENT

HINT:

The installation is in the reverse order of the removal. However, when there is a special point concerning the installation, it is indicated.

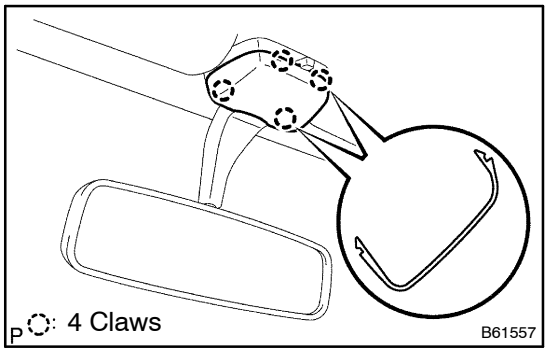


1. REMOVE INNER RR VIEW MIRROR ROOM LAMP LENS

(a) Using a screwdriver, remove the inner rear view mirror room lamp lens.

HINT:

Tape the screwdriver tip before use.

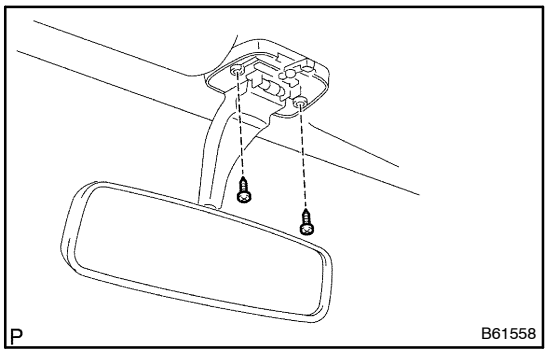

2. REMOVE INNER REAR VIEW MIRROR ASSY

(a) Remove the 2 screws and inner rear view mirror assy, then disconnect the connector.