
750L9–01

REPLACEMENT


1. TILT UP CAB

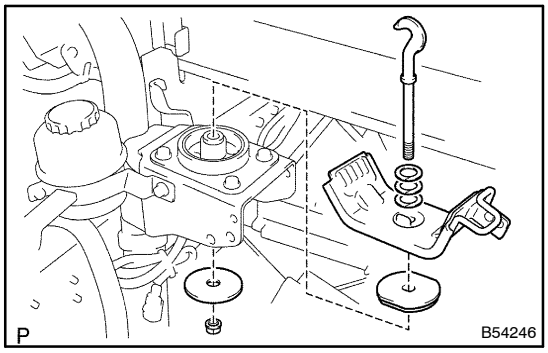

2. REMOVE CAB MOUNTING HOOK BRACKET SUB–ASSY NO.1

(a) Disconnect the connector.

(b) Remove the nut and cab mounting hook bracket.

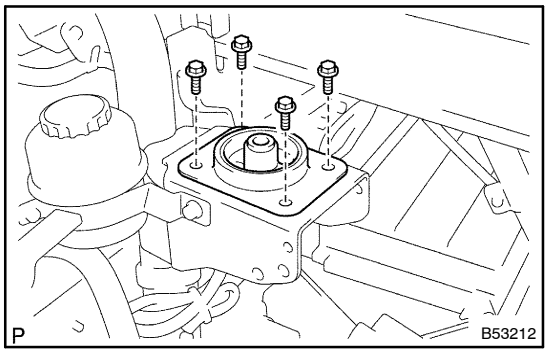


3. REMOVE CAB MOUNTING CUSHION SUB–ASSY NO.2

(a) Remove the 4 bolts and cab mounting cushion.

4. INSTALL CAB MOUNTING CUSHION SUB–ASSY NO.2

(a) Install the mounting cushion with 4 bolts.
Torque: 105 N·m (1,070 kgf·cm, 77 ft·lbf)

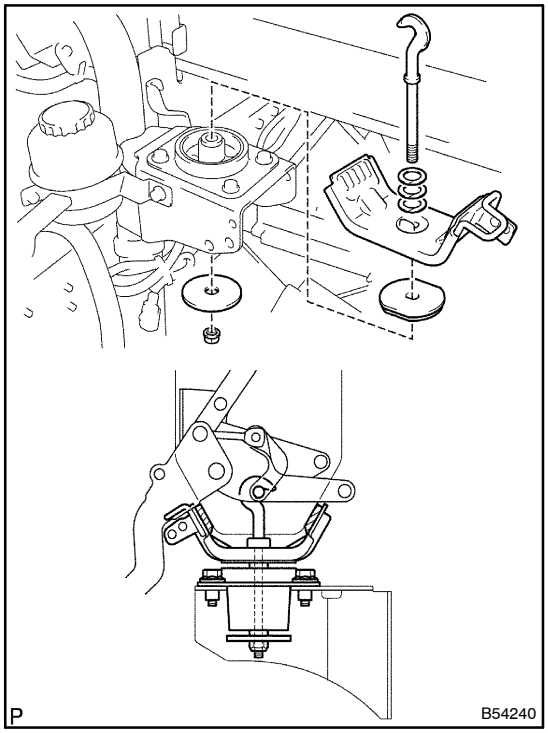

5. INSTALL CAB MOUNTING HOOK BRACKET SUB–ASSY NO.1

(a) Temporarily install the cab rear mounting hook, the cab mounting rebound stopper, the plate washer and the cab mounting cushion stopper together with the cab mounting hook bracket with nut.

NOTICE:

- **Assemble the plate washers as many as those were removed. (sometime no plate washer is used)**
- **Temporarily tighten so that the cab mounting hook bracket can move.**

(b) Make the cab tilt down (should not be locked), after checking that the cab and cab mounting hook bracket evenly hit, tighten the nut.
Torque: 83 N·m (845 kgf·cm, 61 ft·lbf)