
RADIATOR GRILLE

760TZ–01

REPLACEMENT

HINT:

The installation is in the reverse order of the removal. However, when there is a special point concerning the installation, it is indicated.

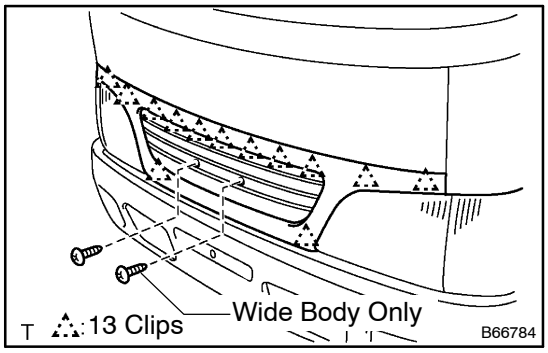

1. REMOVE RADIATOR GRILLE

(a) Wide body:
Remove the 2 screws.

(b) Standard body:
Remove the screw.

(c) Using a screwdriver, disengage the the clips and remove the radiator grille.

HINT:

Tape the screwdriver tip before use.