
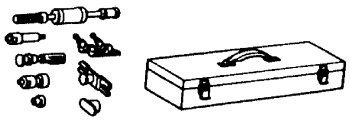

LUBRICATION

PREPARATION

023W7–01

SST

	09228–78010	Oil Filter Wrench	OIL FILTER SUB–ASSY(N04C–TF)
	09910–00015	Puller Set	OIL PUMP ASSY(N04C–TF)
	(09911–00011)	Puller Clamp	OIL PUMP ASSY(N04C–TF)
	(09912–00010)	Puller Slide Hammer	OIL PUMP ASSY(N04C–TF)
	(09913–00010)	Main Drive Gear Puller Attachment (J)	OIL PUMP ASSY(N04C–TF)

Equipment

Oil pressure gauge	
Torque wrench	

SSM

	08826–00080	Seal Packing Black or equivalent (FIPG)	OIL COOLER ASSY(N04C–TF)
	08833–00080	Adhesive 1344 THREE BOND 1344 LOCTITE 242 or equivalent	LUBRICATION SYSTEM(N04C–TF)

Lubricant

Item	Capacity	Classification
Engine oil (N04C–TF) Drain and refill w/Oil filter change w/o Oil filter change	8.2 litters (8.6 US qts, 7.2 imp. qts) 7.2 litters (7.6 US qts, 6.3 imp. qts)	API grade CD, CE, CF, CH–4 or CI–4 Energy–Conserving or ILSAC, multigrade engine oil is recommended. SAE 5W–30 is the best choise for your vehicle, for good fuel economy, and good starting in cold weather.