FRONT CROSSMEMBER (ASSY)




F25274A

Symbol meaning

REMOVAL	: Remove Weld Points
INSTALLATION	: Spot Weld : Plug Weld

F44953B

REMOVAL·INSTALLATION

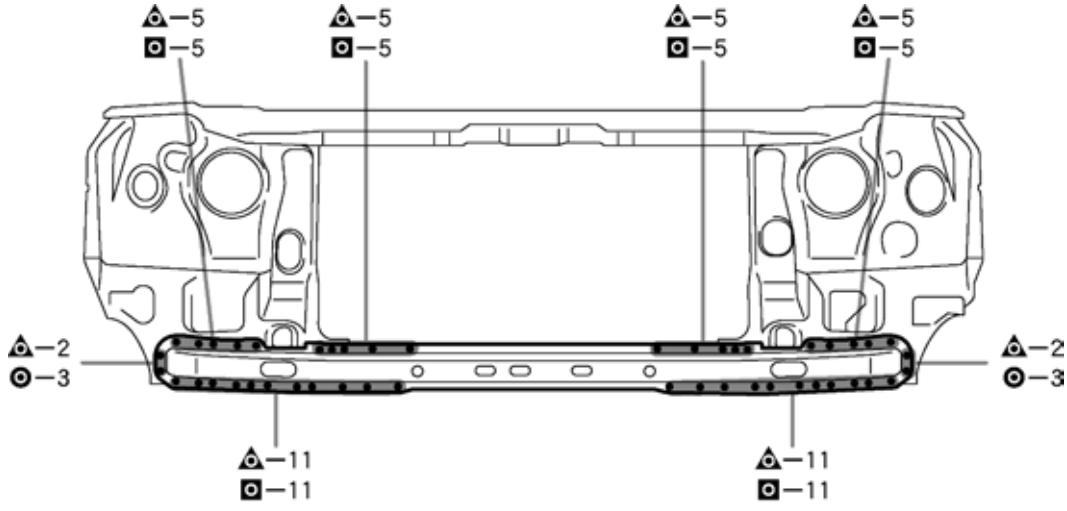

F25274

INSTALLATION POINT

1 Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
2 Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
3 After welding, apply body sealer to the corresponding parts. (See the paint·coating)