COWL TOP TO APRON BRACE (ASSY)




F25277A

Symbol meaning

REMOVAL	: Remove Weld Points	: Cut with disc sander etc.
INSTALLATION	: Plug Weld	: Fillet Weld

F44956B

REMOVAL·INSTALLATION

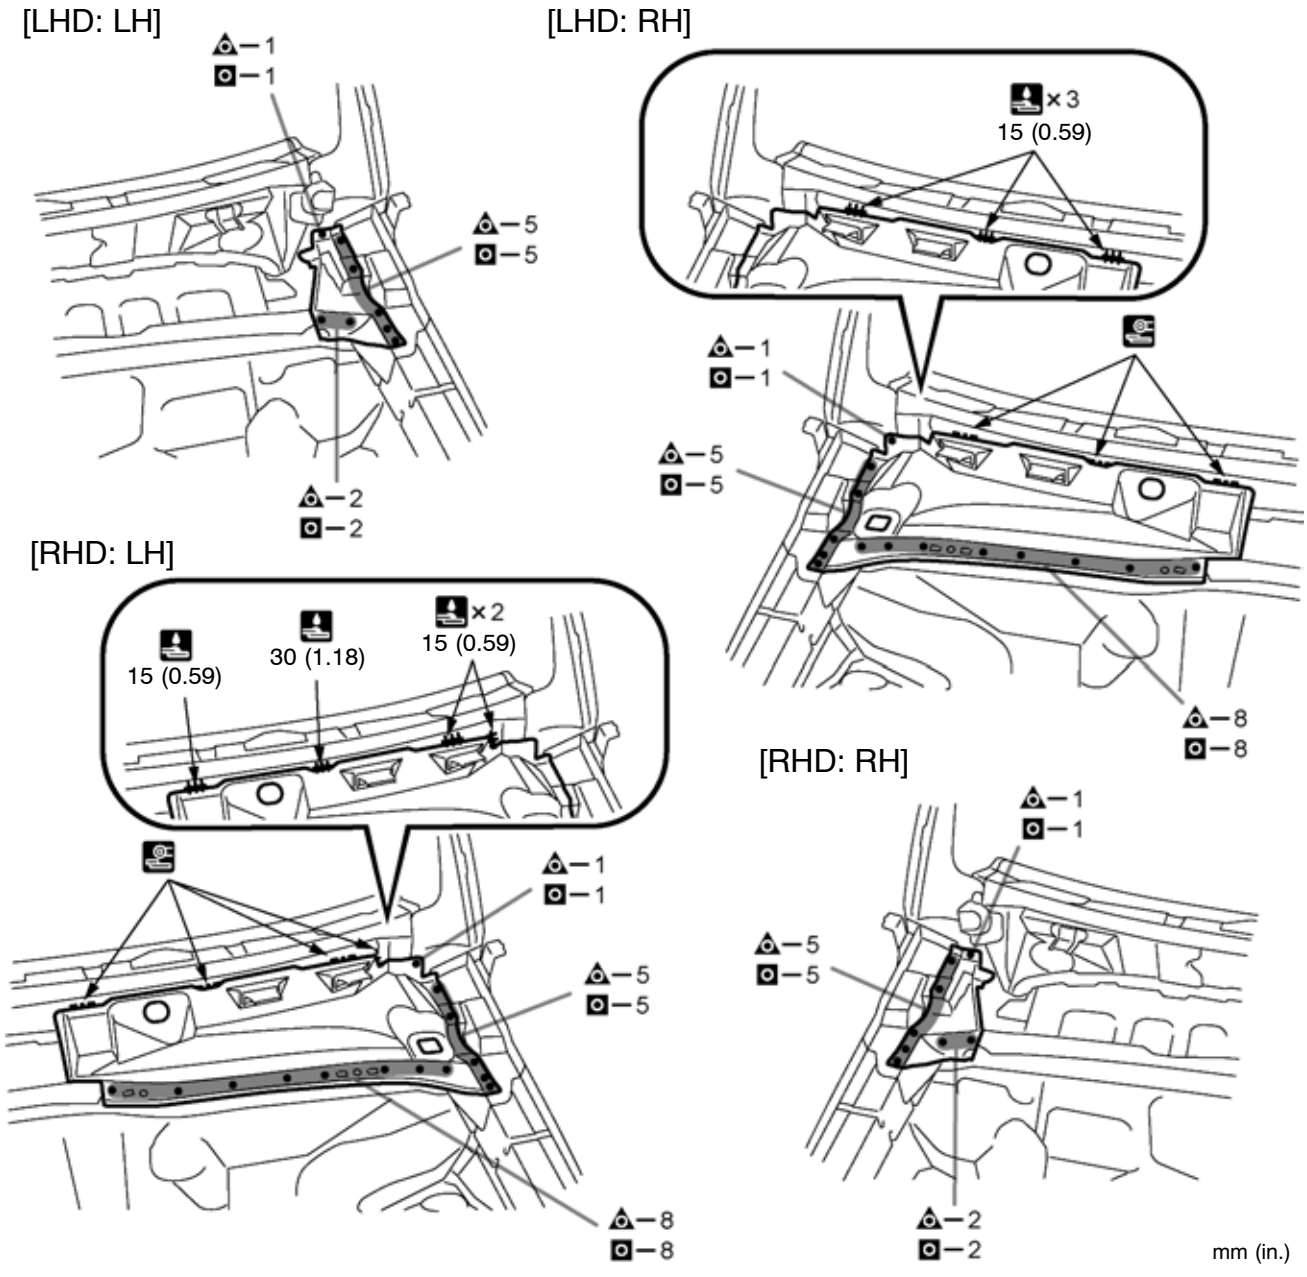

F44956

INSTALLATION POINT

1 After welding, apply body sealer to the corresponding parts. (See the paint·coating)
2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.