COWL SIDE REINFORCEMENT (ASSY)




F25278A


Symbol meaning

REMOVAL	: Remove Weld Points
INSTALLATION	: Plug Weld

F44957B

REMOVAL·INSTALLATION

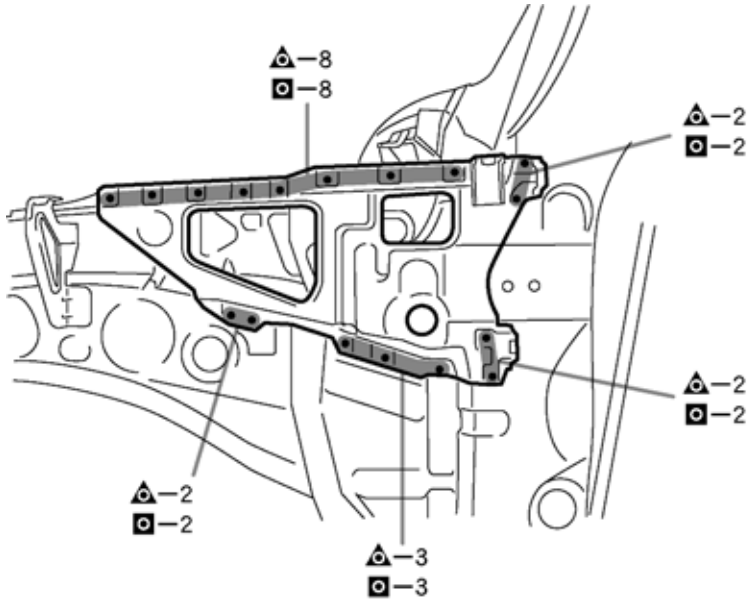

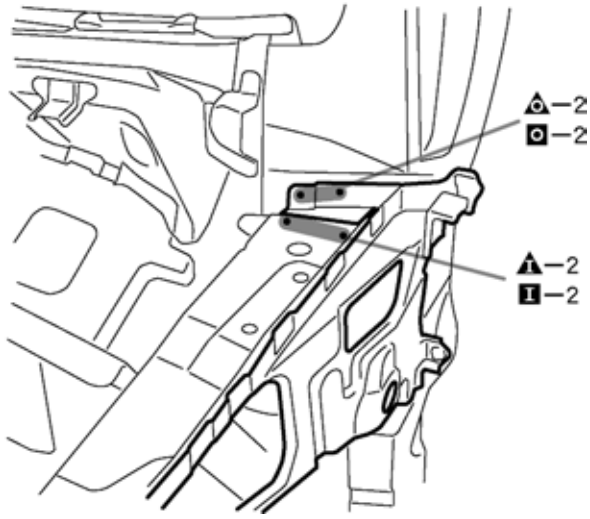

F25278

INSTALLATION POINT

1 After welding, apply body sealer to the corresponding parts. (See the paint·coating)
2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.