
# REAR FLOOR SIDE REAR MEMBER (ASSY)

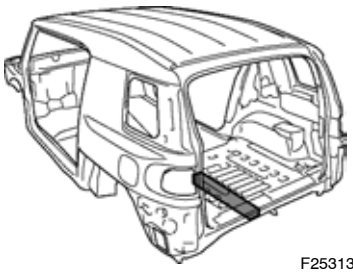

F25313A


With the body lower back panel and rear floor pan removed.


Symbol meaning

| | |
|---|---|
| REMOVAL | A M A 1 : Remove Weld Points |
| INSTALLATION | M I : Plug Weld |

F44972B

**REMOVAL·INSTALLATION**

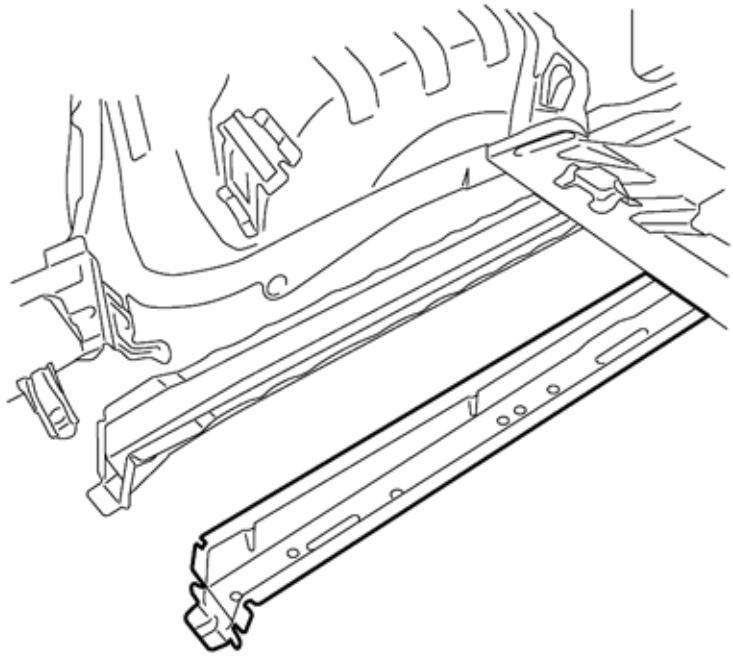

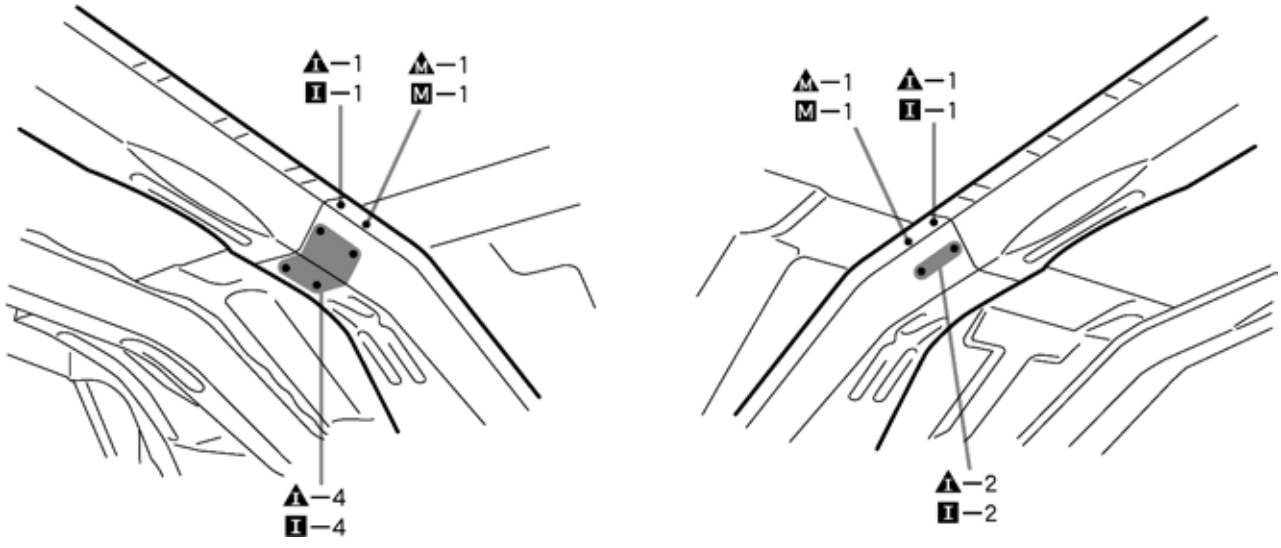


F25313

**INSTALLATION POINT**

1 After welding, apply undercoating to the corresponding parts.(See the paint·coating)
2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.