
■IMPROPER CONNECTION PREVENTION LOCK MECHANISM


The improper connection prevention lock mechanism consists of the Center Airbag Sensor Assembly and a holder.

- The Center Airbag Sensor Assembly has a pin.
- The holder has a lever. The holder and the connectors are locked via a retainer and a lance.

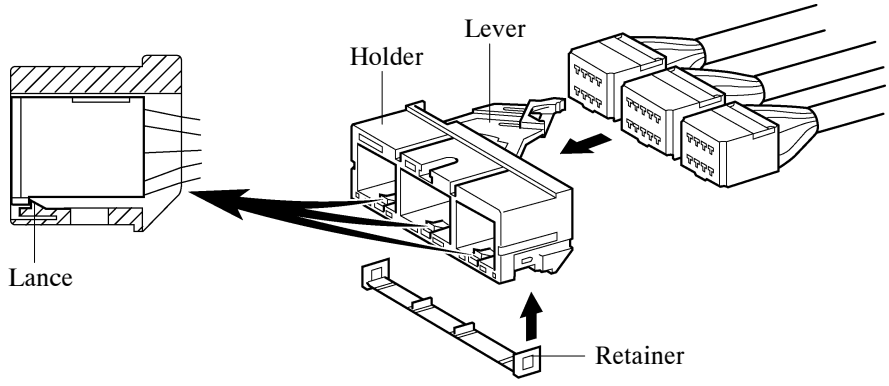

07D0BE50C

When connecting the holder with the connector, the lever is pushed into the locked position by rotating it around the pin axis in order to lock the holder securely.

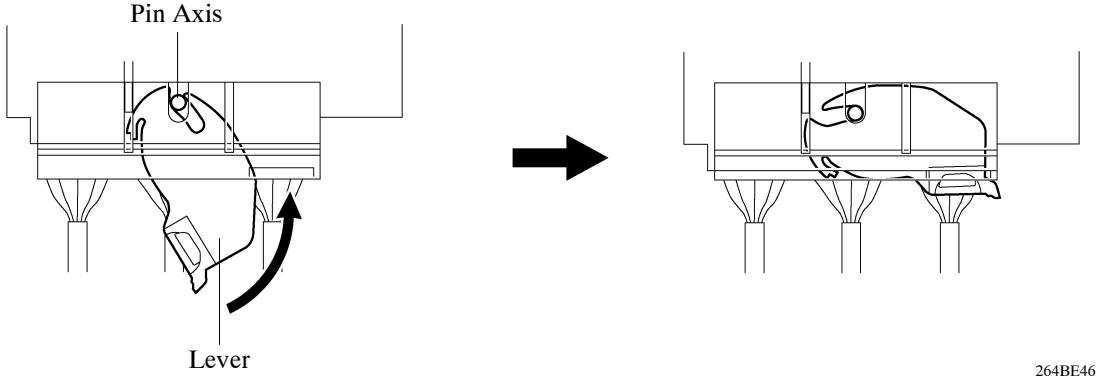

264BE46