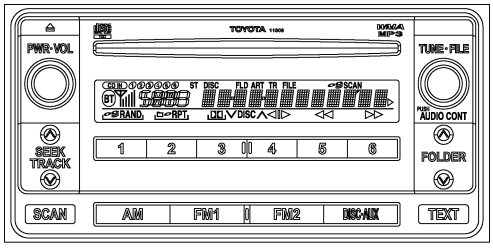
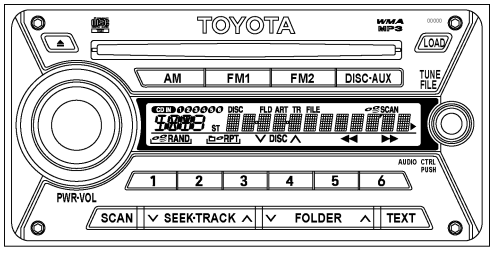
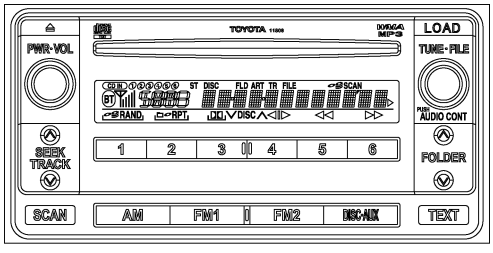
EQUIPMENT

Audio System

1. General


The ceiling speaker with exciter creates a space which encompasses the passenger's body with a shower of sound.

×: Standard OP: Option –: Not Equipped

Unit Design	Audio System	Middle East	General Countries	China
–	Audio System (6-speaker)	OP	×	–
 07D1MO11C	● Audio Head Unit: FUJITSU TEN ● AM/FM Tuner ● In-dash CD ● 6-speaker	×	–	–
 07D0MO12C	● Audio Head Unit: FUJITSU TEN ● AM/FM Tuner ● In-dash 6-CD Changer ● 8-speaker	OP	–	–
	● Audio Head Unit: FUJITSU TEN ● AM/FM Tuner ● In-dash 6-CD Changer ● 9-speaker	OP	–	–
 07D1MO10C	● Audio Head Unit: FUJITSU TEN ● AM/FM Tuner ● In-dash 6-CD Changer ● 8-speaker	–	–	×
	● Audio Head Unit: FUJITSU TEN ● AM/FM Tuner ● In-dash 6-CD Changer ● 9-speaker	–	–	OP


2. Models for Middle East and China

- An AUX input jack is provided as an input terminal for a portable audio device.
- A sub-woofer ON/OFF switch, which allows the user to turn the deep bass of the subwoofer on and off, is provided.

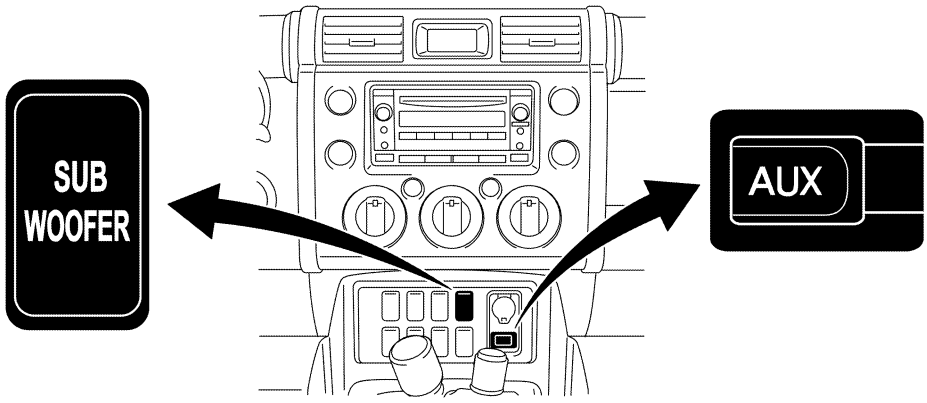

0240MO18Z

3. Audio Component Locations and Specifications

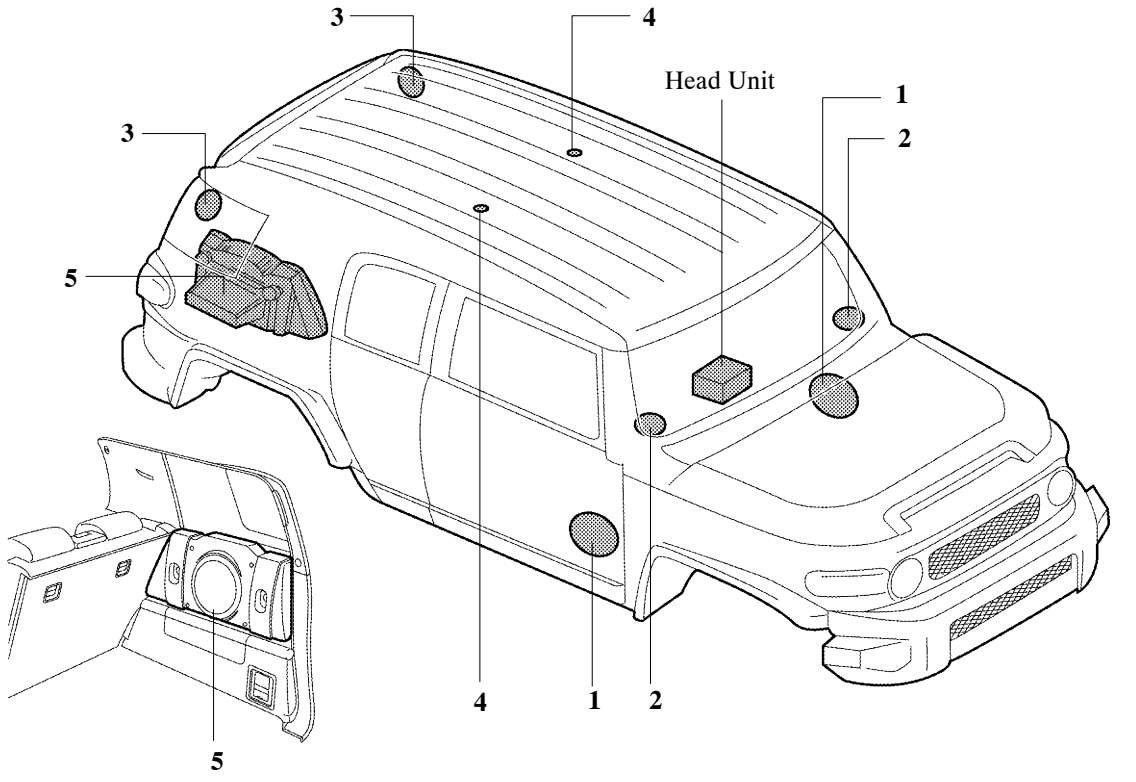

Speaker Specification

×: Standard OP: Option –: Not Equipped


Speaker (Maker)		Specification			Middle East	General Countries	China
		Caliber	Impedance	Input Rating			
(1)	Full Range (PANASONIC)	15 × 23 cm (6 × 9 in.)	4 Ω	20 W	×	×	×
(2)	Tweeter (FUJITSU TEN)	6.5 cm (2.6 in.)	8 Ω	9 W	×	×	×
(3)	Tweeter (FUJITSU TEN)	6.5 cm (2.6 in.)	8 Ω	9 W	OP	–	×
(4)	Ceiling Speaker with Exciter (FUJITSU TEN)	-	4 Ω	20 W	×	×	×
(5)	Box Woofer (FUJITSU TEN)	20 cm (8 in.)	2/1.9 Ω	60 W	OP*	–	OP

*: 9-speaker system only

Ceiling Speaker with Exciter

The ceiling speaker with exciter utilizes the roof headlining as a diaphragm. This speaker has the following features:

- The exciter is mounted on the roof headlining. This helps create a better soundscape which otherwise cannot be provided only by the door speakers mounted in lower positions. This widens the top of the soundscape and creates a natural acoustic space.
- The ceiling speaker with exciter has become thinner and lighter due to the adoption of the NXT flat panel speaker technology.

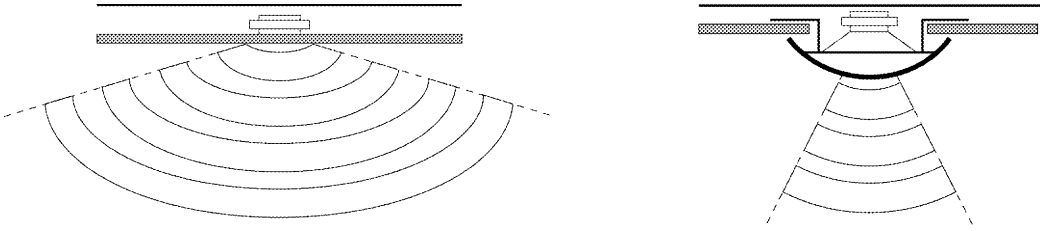


Ceiling Speaker with Exciter **Conventional Speaker**

0240MO20C

TOYOTA Parking Assist-sensor System

The TOYOTA parking assist-sensor system informs the driver of the approx. distance between the sensors and the obstacles relative to the vehicle by sounding a clearance warning buzzer.

(1): Approx. 110 cm (43.3 in.) to 150 cm (59.1 in)*
(2): Approx. 160 cm (63.0 in.)
(3): Approx. 50 cm (19.7 in.)
(4): Approx. 20 cm (7.9 in.)
(5): Approx. 40 cm (15.7 in.)

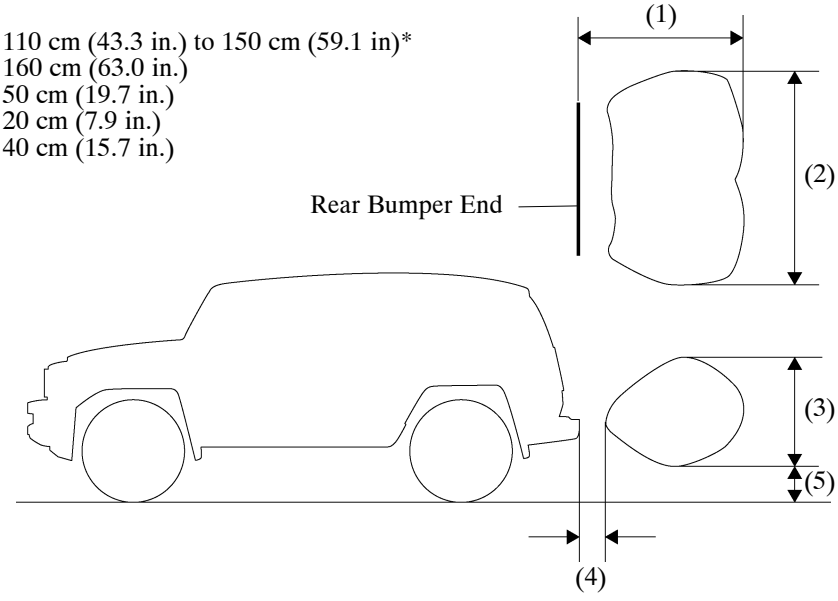

0240MO21C

Detection Area

*: The maximum detection range will vary depending on the type of obstacles.