COWL SIDE REINFORCEMENT (ASSY)




F25278A

Symbol meaning

REMOVAL	: Remove Weld Points
INSTALLATION	: MIG Plug Weld

F25278B

REMOVAL·INSTALLATION

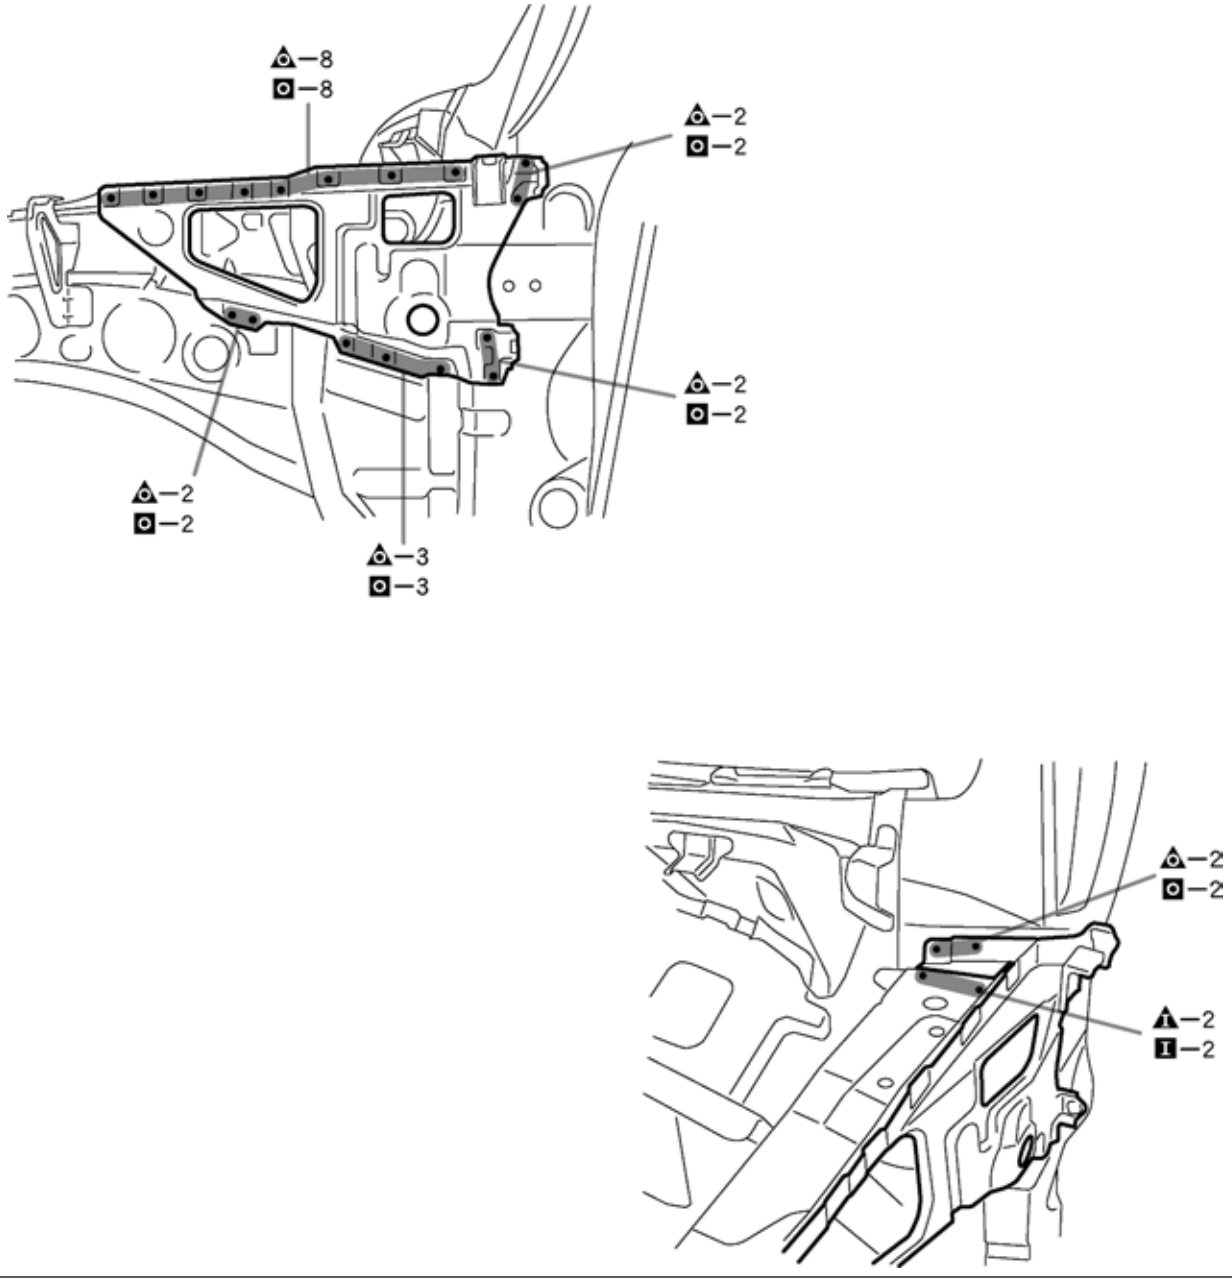

F25278

INSTALLATION POINT

1 After welding, apply body sealer to the corresponding parts. (See the paint·coating)

2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.