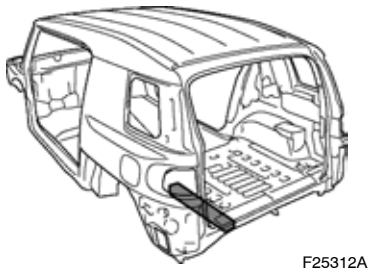
REAR FLOOR SIDE MEMBER (CUT)


F25312A


With the body lower back panel and rear floor pan removed.

Symbol meaning

REMOVAL	: Cut and Join Location	
INSTALLATION	: Butt Weld	

F25312B

REMOVAL·INSTALLATION

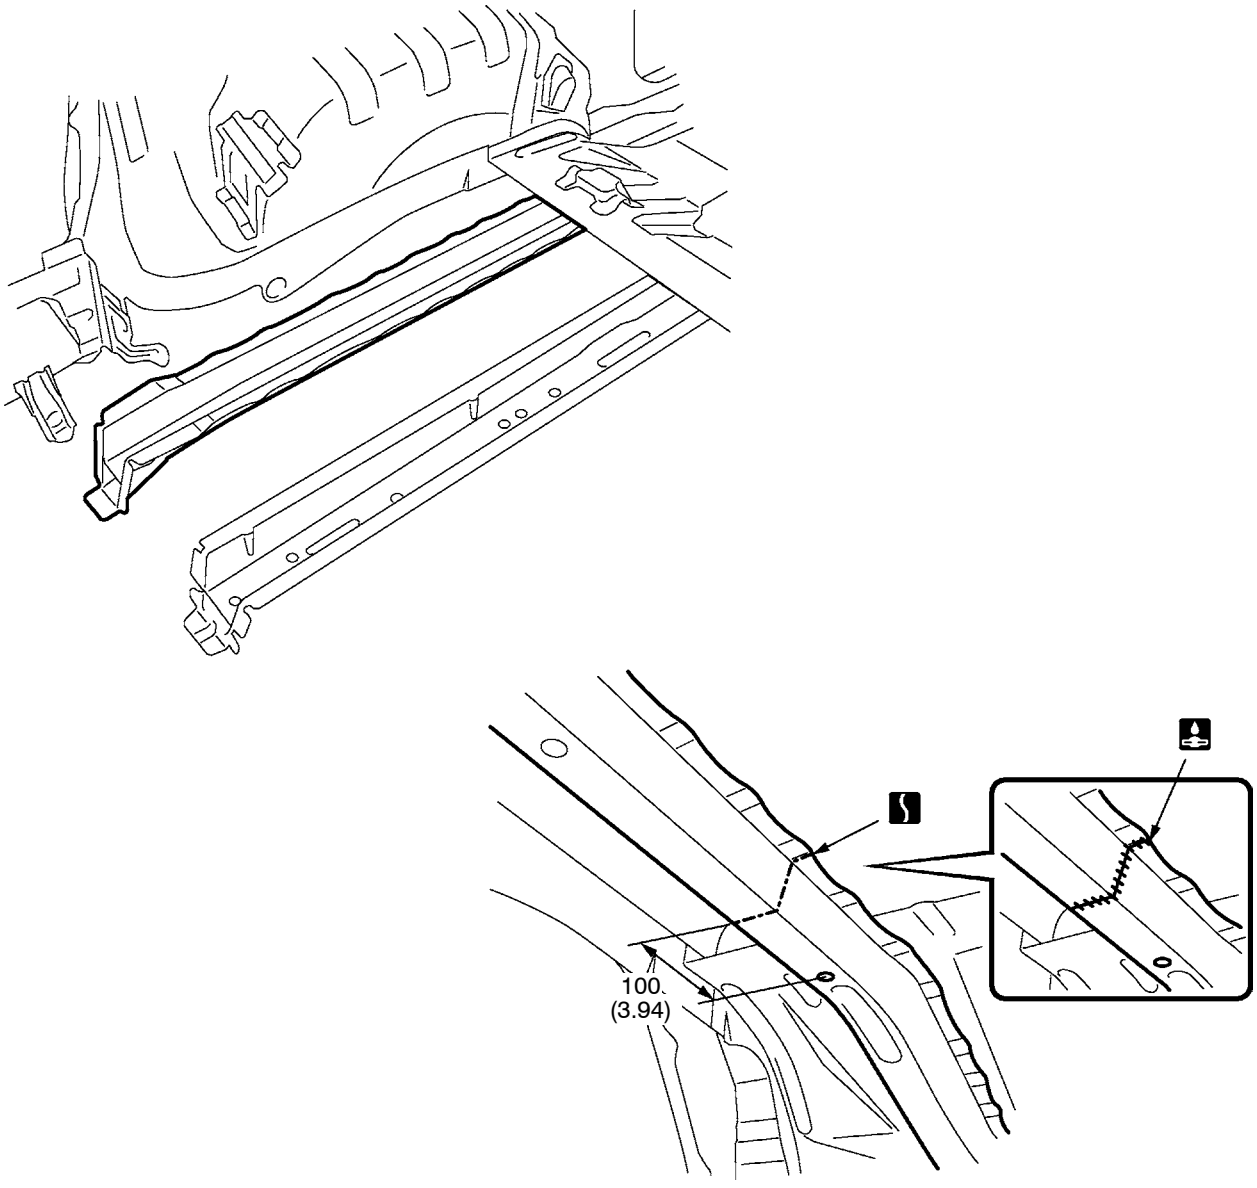

mm (in.)

F25312

INSTALLATION POINT

1 After welding, apply undercoating to the corresponding parts.(See the paint·coating)
2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.