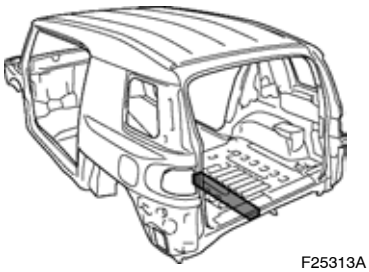
REAR FLOOR SIDE REAR MEMBER (ASSY)


F25313A


With the body lower back panel and rear floor pan removed.


Symbol meaning

REMOVAL	A A : Remove Weld Points
INSTALLATION	M I : MIG Plug Weld

F25313B

REMOVAL·INSTALLATION

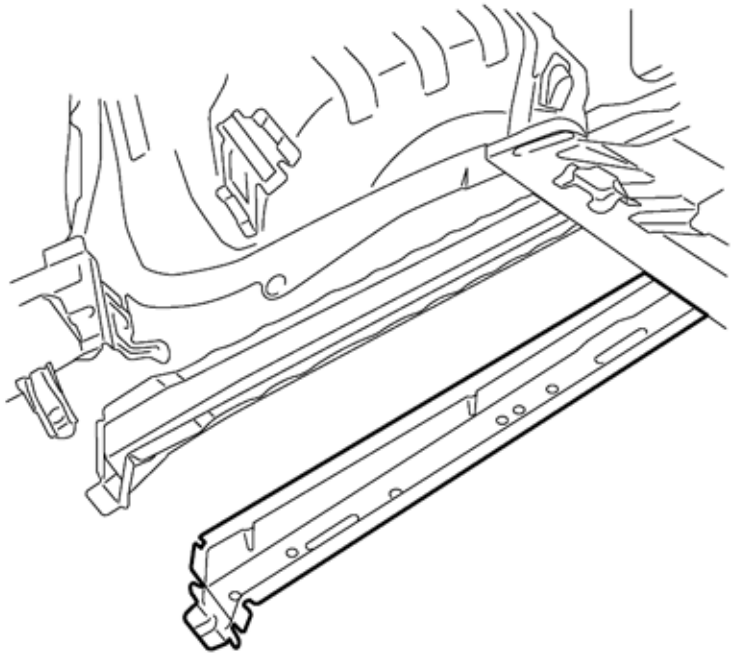

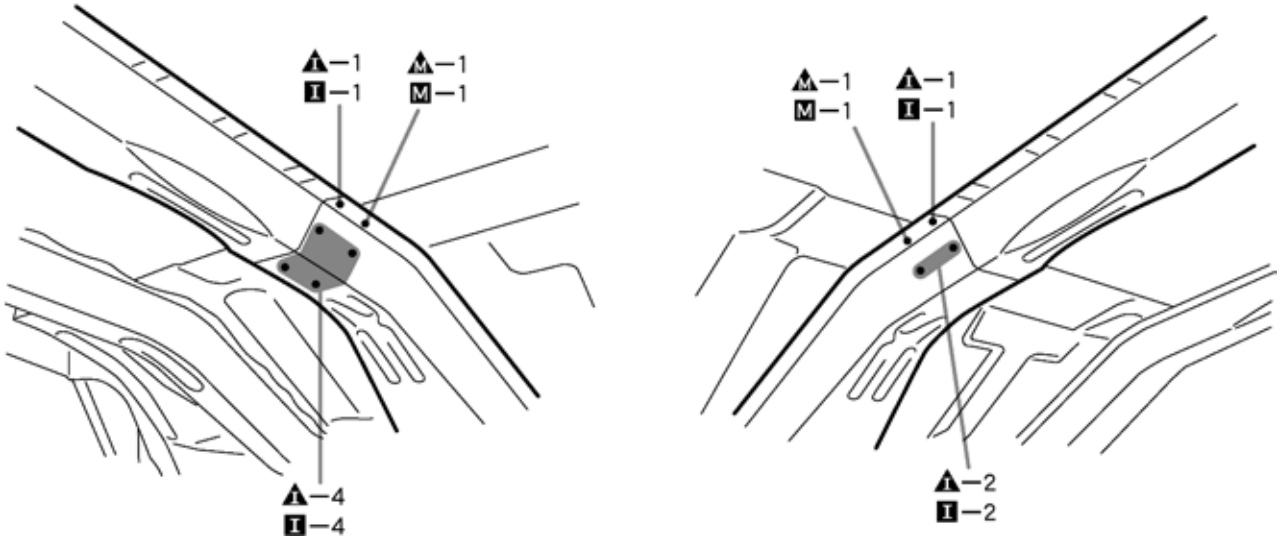

F25313

INSTALLATION POINT

1 After welding, apply undercoating to the corresponding parts.(See the paint·coating)
2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.