
■IMPROPER CONNECTION PREVENTION LOCK MECHANISM


An improper connection prevention lock mechanism consists of Airbag Sensor Assembly and the holder.

- Airbag Sensor Assembly has an axis.
- The holder has a lever. The holder and the connectors are locked via a retainer and a lance.

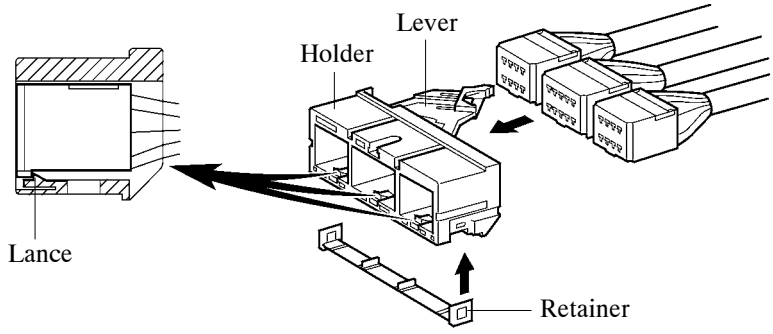

264BE45

When connecting the holder with connector, the lever is pushed into the locked position by rotating it around the pin axis in order to lock the holder securely.

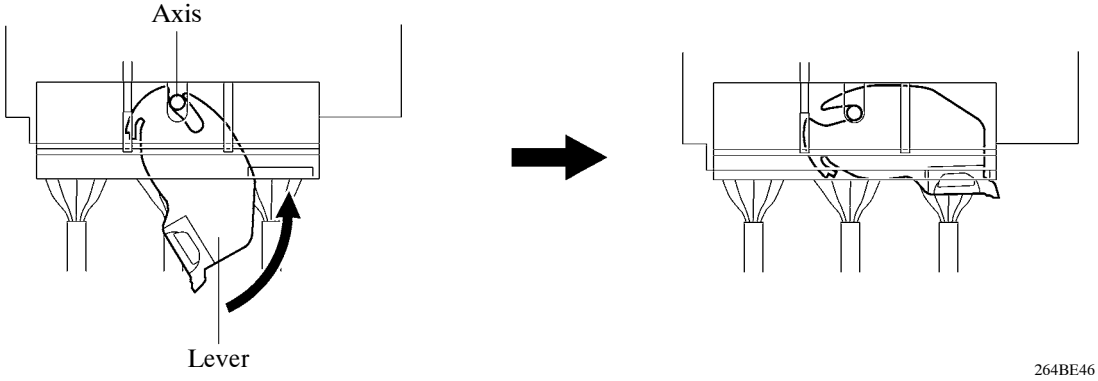

264BE46