
# SUSPENSION AND AXLE

## ■SUSPENSION


A double-wishbone independent front suspension and a 4-link coil spring with lateral rod type rear suspension are used.
Due to the optimal allocation of components, the front and rear suspensions realize excellent riding comfort, controllability, and off-road drivability.

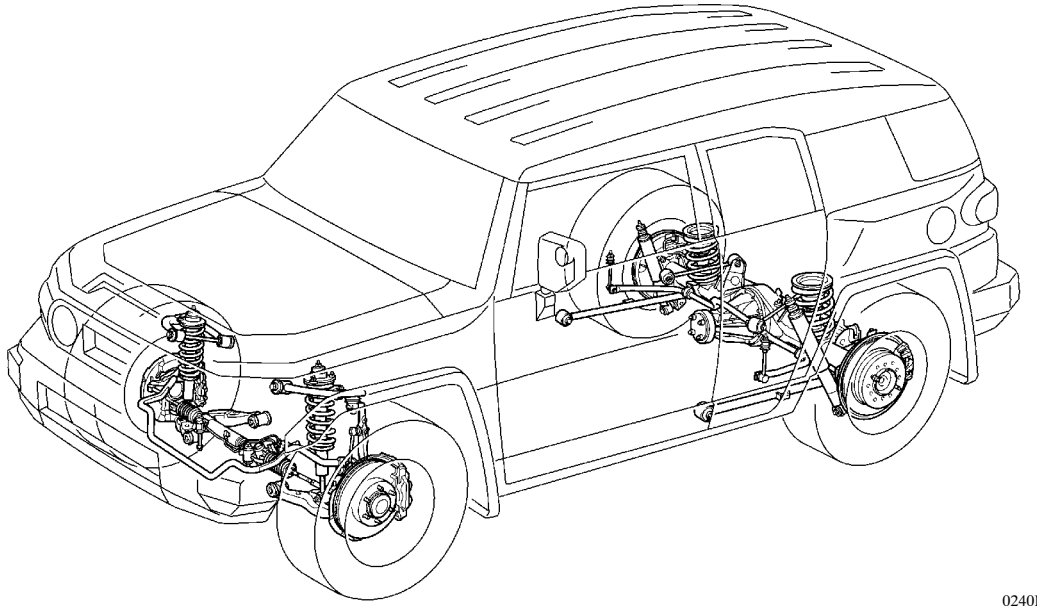

0240MO27Z

**Service Tip**

The camber and caster of the front suspension can be adjusted using the adjustment cams of the lower arms. For details, see the 2007 FJ Cruiser Repair Manual (Pub. No. RM0240U).

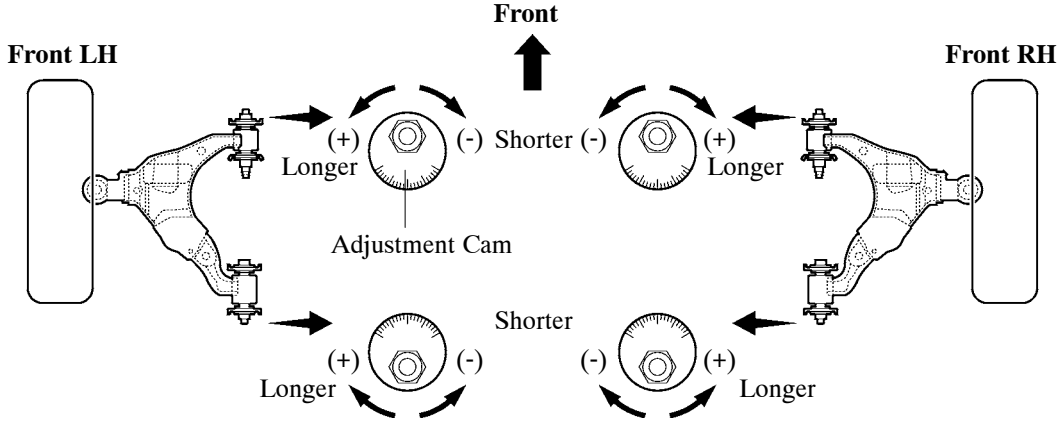


0240CH22C

**▶ Specification ◀**

| Model | | | 2WD | 4WD |
|---|---|---|---|---|
| Tread | Front | mm (in.) | 1605 (63.2) | 1605 (63.2) |
| | Rear | mm (in.) | 1605 (63.2) | 1605 (63.2) |
| Front Wheel Alignment | Caster | degree | 3° 34’ | 2° 49’ |
| | Camber | degree | -0° 34’ | -0° 09’ |
| | Toe-in | mm (in.) | 1 (0.04) | 1 (0.04) |
| | King Pin Inclination | degree | 13° 05’ | 12° 21’ |