

■ FUEL SYSTEM

1. General

- A fuel return system is used.
- A fuel cut control is used to stop the fuel pump when the SRS airbag is deployed in a frontal or side collision. For details, see page EG-60.
- Compact 12-hole type fuel injectors are used to improve the atomization of fuel.
- Fuel delivery pipes made of plastic are used to realize weight savings.
- A quick connector is used to connect the fuel line for ease of serviceability.
- A multi-layer plastic fuel tank is used to address environmental concerns.
- A fuel drain mark is provided on the fuel tank.
- An ORVR (Onboard Refueling Vapor Recovery) system is used. For details, see page EG-66.

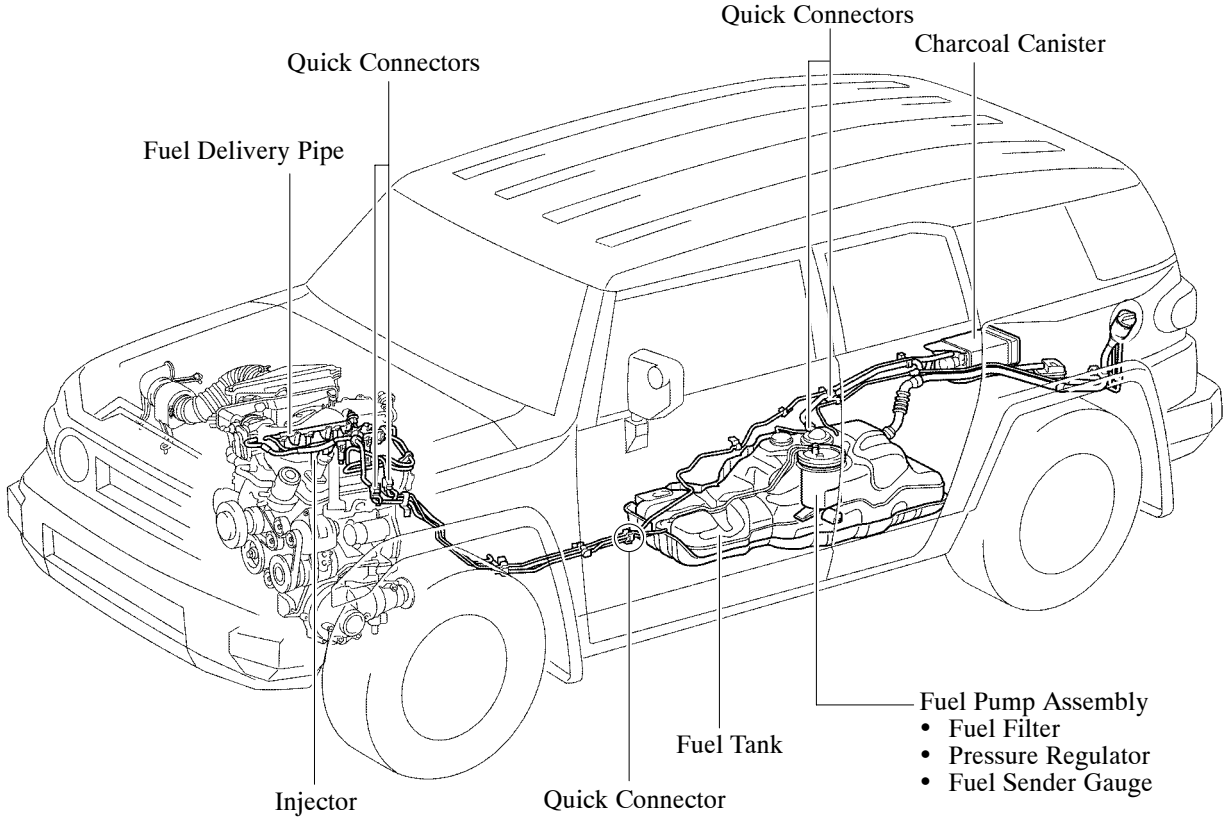

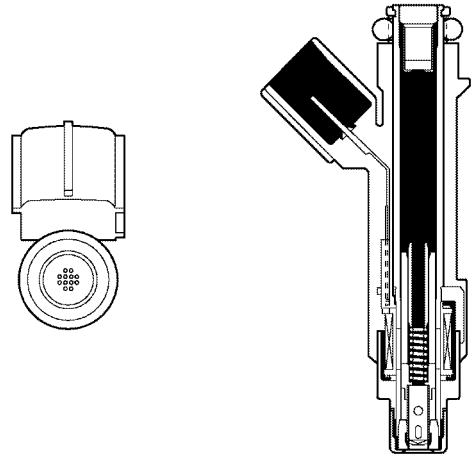


Injector

0240EG21Z

Service Tip


The fuel drain mark has been provided at the fuel tank. When dismantling (scrapping) the vehicle, drain fuel by making a hole at this mark.

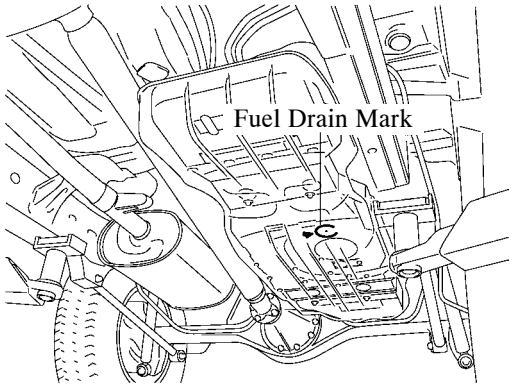

0240EG22C

2. Fuel Tank

The multi-layer plastic fuel tank consists of six layers of four types of materials, and one of those is a recyclable material to address environmental concerns.

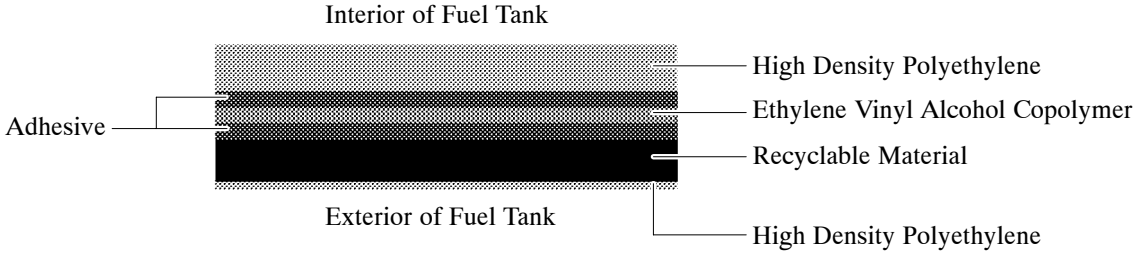

Cross Section of Fuel Tank

D13N27