

# FRONT FRAME

## Standard body

**(Three-Dimensional Distance)**

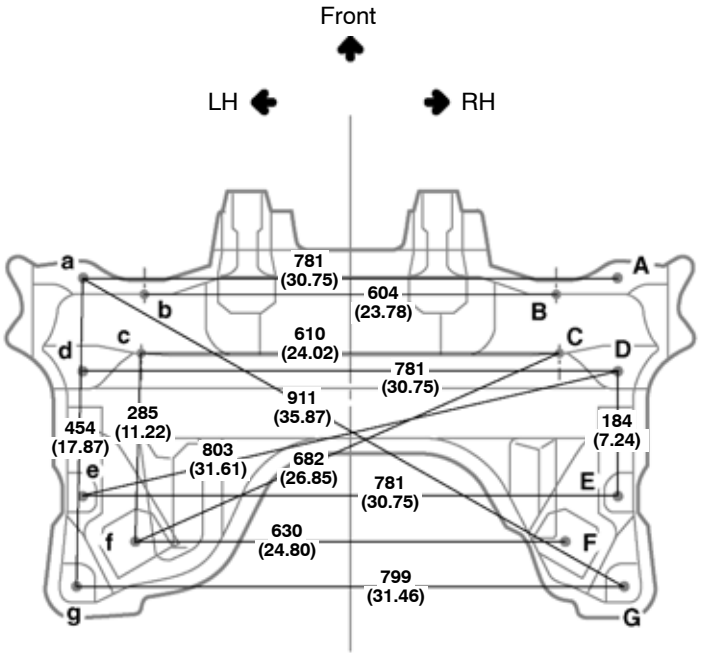

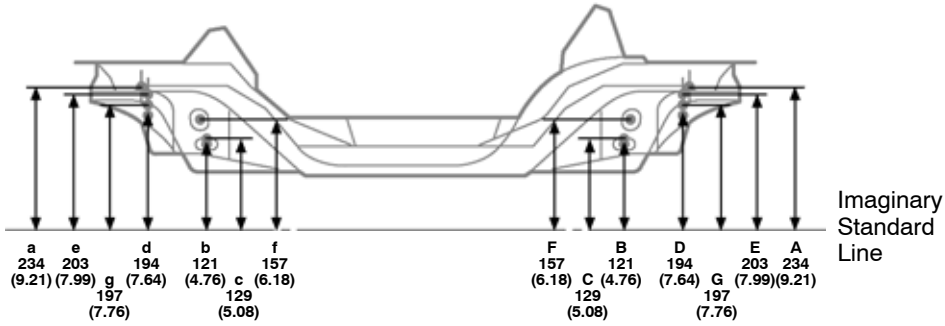



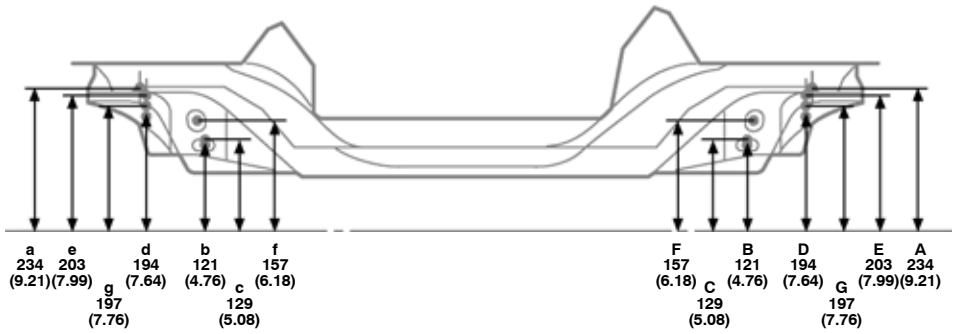

mm (in.)

| Symbol | Name | Hole dia. | Symbol | Name | Hole dia. |
|---|---|---|---|---|---|
| A, a | Front suspension crossmember installation hole | 20 (0.79) | E, e | Front suspension crossmember installation hole | 21 (0.83) |
| B, b | Lower arm installation hole-front | 35 (1.38) × 17 (0.67) | F, f | Strut bar installation hole | 32 (1.26) |
| C, c | Lower arm installation hole-rear | 35 (1.38) × 17 (0.67) | G, g | Front suspension crossmember installation hole | 20 (0.79) |
| D, d | Front suspension crossmember installation hole | 20 (0.79) | — | — | — |

# FRONT FRAME
## Wide body

**(Three-Dimensional Distance)**

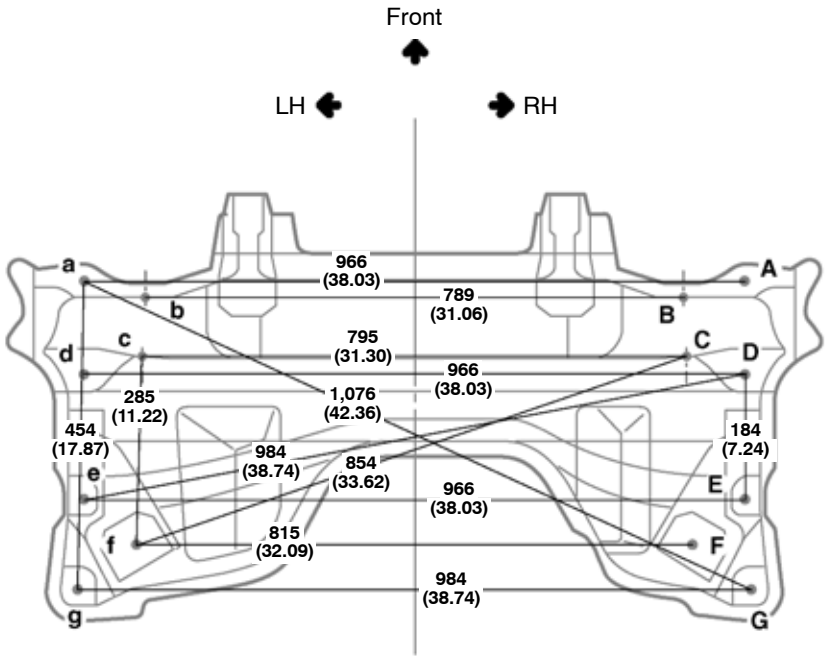





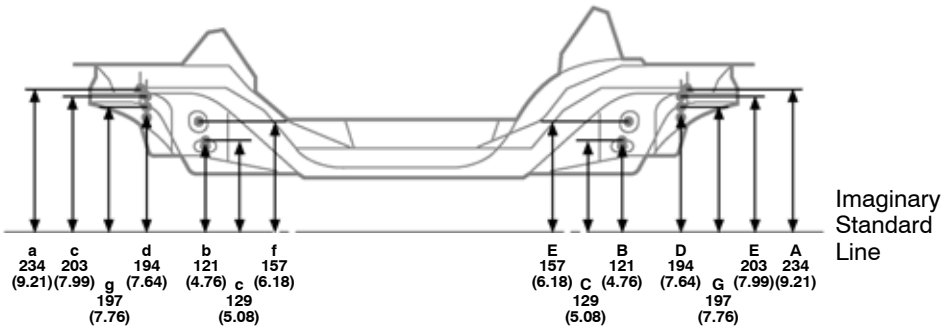

mm (in.)

| Symbol | Name | Hole dia. | Symbol | Name | Hole dia. |
|---|---|---|---|---|---|
| A, a | Front suspension crossmember installation hole | 20 (0.79) | E, e | Front suspension crossmember installation hole | 21 (0.83) |
| B, b | Lower arm installation hole-front | 35 (1.38) × 17 (0.67) | F, f | Strut bar installation hole | 32 (1.26) |
| C, c | Lower arm installation hole-rear | 3 (1.38) × 17 (0.67) | G, g | Front suspension crossmember installation hole | 20 (0.79) |
| D, d | Front suspension crossmember installation hole | 20 (0.79) | — | — | — |

# FRONT FRAME (Cont'd)
## Standard body

**(Two-Dimensional Distance)**

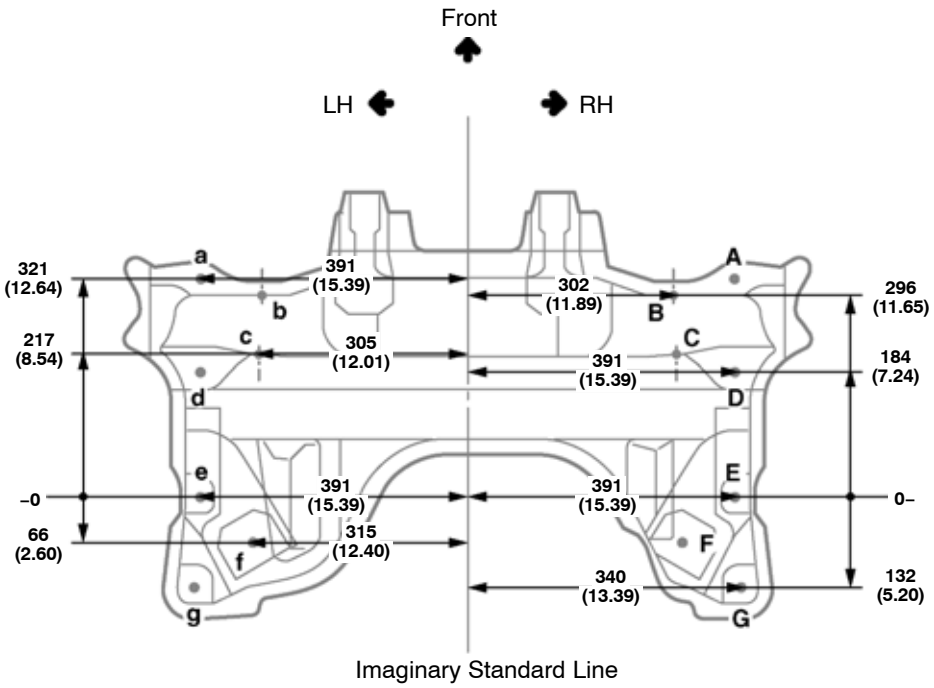





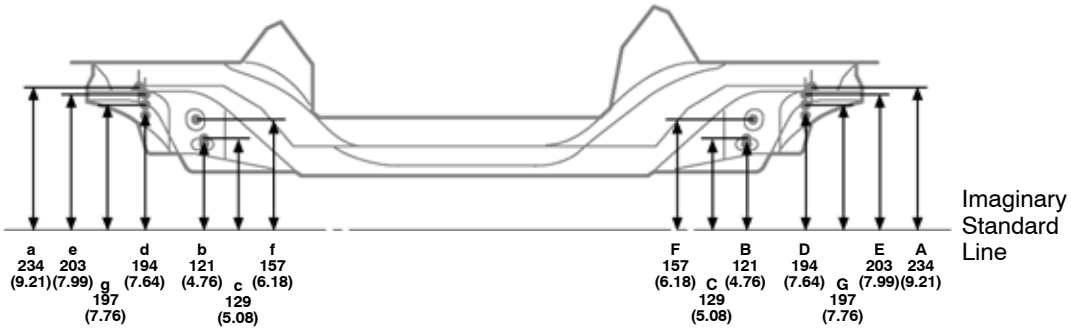

mm (in.)

| Symbol | Name | Hole dia. | Symbol | Name | Hole dia. |
|---|---|---|---|---|---|
| A, a | Front suspension crossmember installation hole | 20 (0.79) | E, e | Front suspension crossmember installation hole | 21 (0.83) |
| B, b | Lower arm installation hole-front | 35 (1.38) × 17 (0.67) | F, f | Strut bar installation hole | 32 (1.26) |
| C, c | Lower arm installation hole-rear | 35 (1.38) × 17 (0.67) | G, g | Front suspension crossmember installation hole | 20 (0.79) |
| D, d | Front suspension crossmember installation hole | 20 (0.79) | — | — | — |

# FRONT FRAME (Cont'd)
## Wide body

**(Two-Dimensional Distance)**

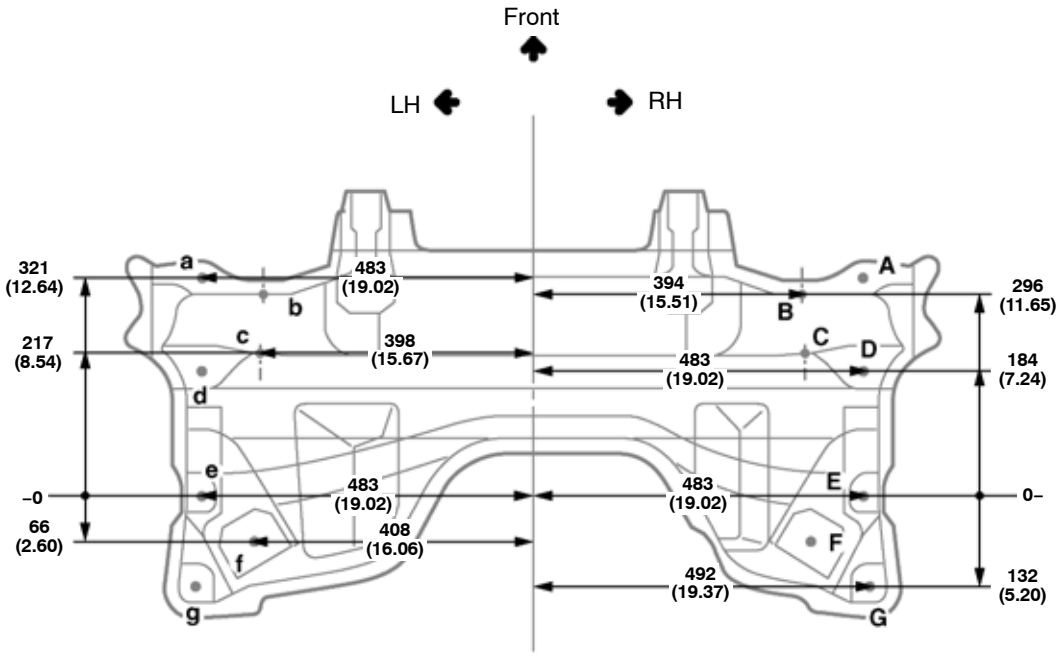


mm (in.)

| Symbol | Name | Hole dia. | Symbol | Name | Hole dia. |
|---|---|---|---|---|---|
| A, a | Front suspension crossmember installation hole | 20 (0.79) | E, e | Front suspension crossmember installation hole | 21 (0.83) |
| B, b | Lower arm installation hole-front | 35 (1.38) × 17 (0.67) | F, f | Strut bar installation hole | 32 (1.26) |
| C, c | Lower arm installation hole-rear | 35 (1.38) × 17 (0.67) | G, g | Front suspension crossmember installation hole | 20 (0.79) |
| D, d | Front suspension crossmember installation hole | 20 (0.79) | — | — | — |