
BODY DIMENSION DRAWINGS

ENGINE COMPARTMENT (Standard body)

(Three-Dimensional Distance)

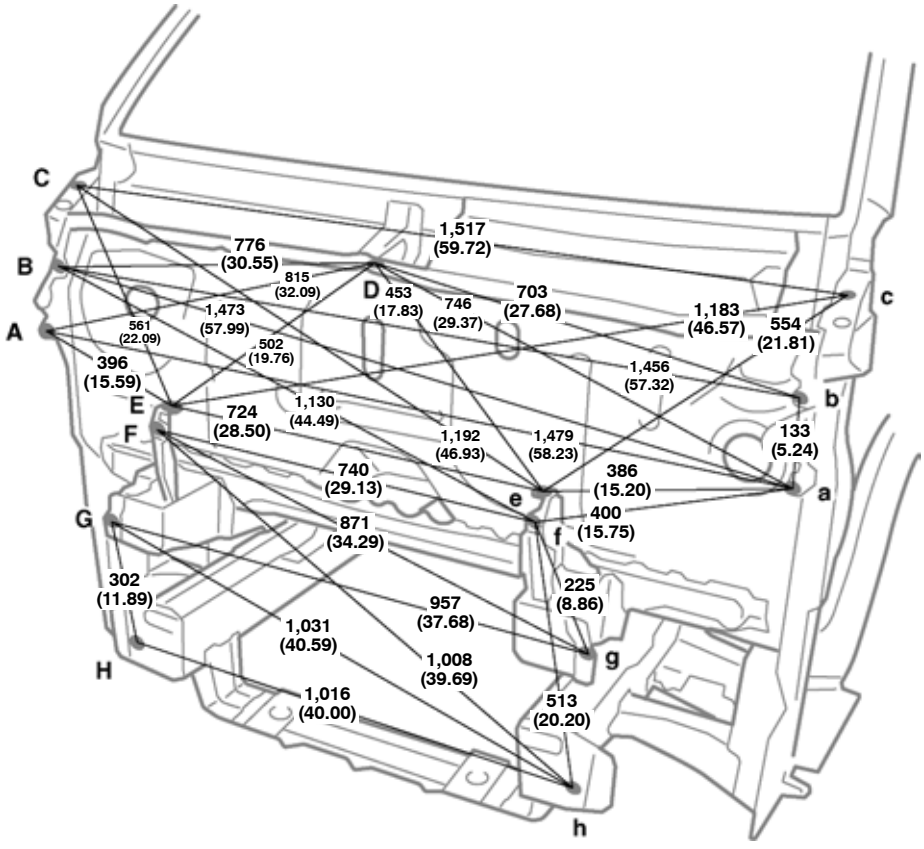

Vehicle Dimensions

B-E	b-e	B-F or b-f	A-e
430 (16.93)	422 (16.61)	447 (17.60)	1,111 (43.74)

a-E	B-e	b-E	A-f or a-F
1,101 (43.35)	1,116 (43.94)	1,107 (43.58)	1,120 (44.09)

Height from Imaginary Standard Line

C, c	E, e	G, g	H, h
1,136 (44.72)	806 (31.73)	576 (22.68)	277 (10.91)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front fender installation nut	6 (0.24) nut	E, e	Radiator support upper center installation nut	6 (0.24) nut
B, b	Front fender installation nut	6 (0.24) nut	F, f	Radiator support upper center installation nut	6 (0.24) nut
C, c	Hood hinge installation nut	10 (0.39) nut	G, g	Front bumper reinforcement installation nut	10 (0.39) nut
D	Cowl top ventilator louver installation hole	6.5 (0.26)	H, h	Front bumper reinforcement installation nut	10 (0.39) nut

ENGINE COMPARTMENT
(Wide body)

(Three-Dimensional Distance)

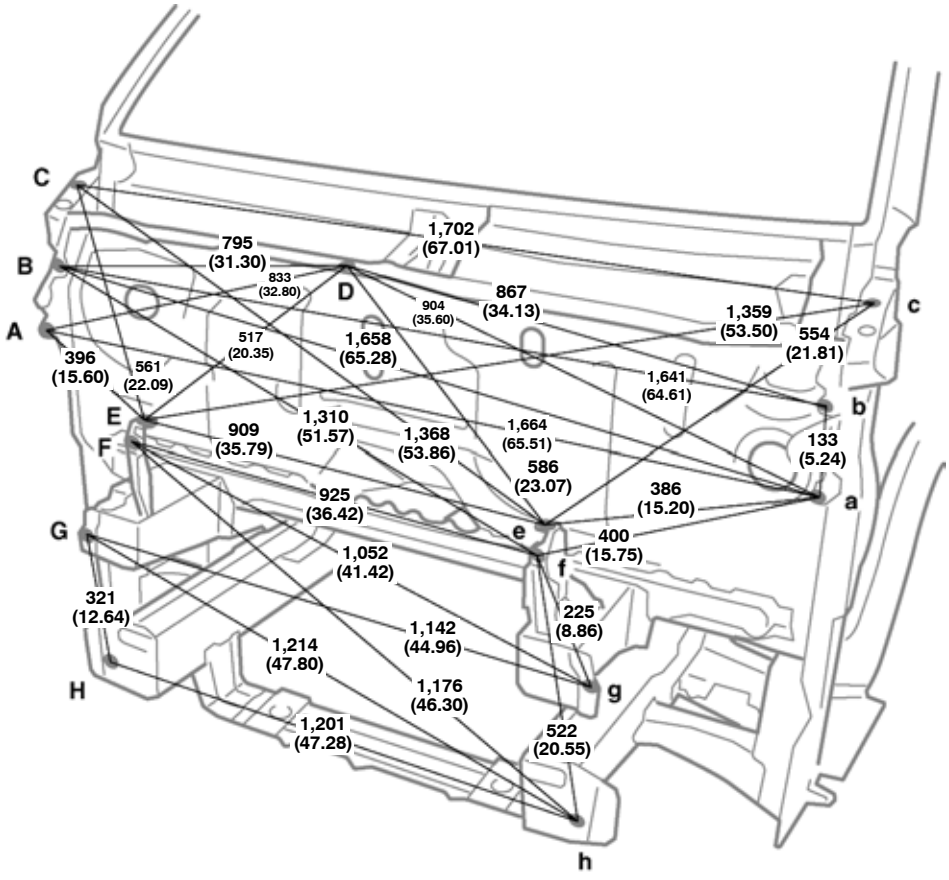

Vehicle Dimensions

B-E	b-e	B-F or b-f	A-e
430 (16.93)	422 (16.61)	447 (17.60)	1,296 (51.02)

a-E	B-e	b-E	A-f or a-F
1,286 (50.63)	1,298 (51.10)	1,289 (50.75)	1,303 (51.30)

Height from Imaginary Standard Line

C, c	E, e	G, g	H, h
1,136 (44.72)	806 (31.73)	576 (22.68)	277 (10.91)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front fender installation nut	6 (0.24) nut	E, e	Radiator support upper center installation nut	6 (0.24) nut
B, b	Front fender installation nut	6 (0.24) nut	F, f	Radiator support upper center installation nut	6 (0.24) nut
C, c	Hood hinge installation nut	10 (0.39) nut	G, g	Front bumper reinforcement installation nut	10 (0.39) nut
D	Cowl top ventilator louver installation hole	6.5 (0.26)	H, h	Front bumper reinforcement installation nut	10 (0.39) nut

BODY OPENING AREAS (Side View: Front) (Standard body)

(Three-Dimensional Distance)

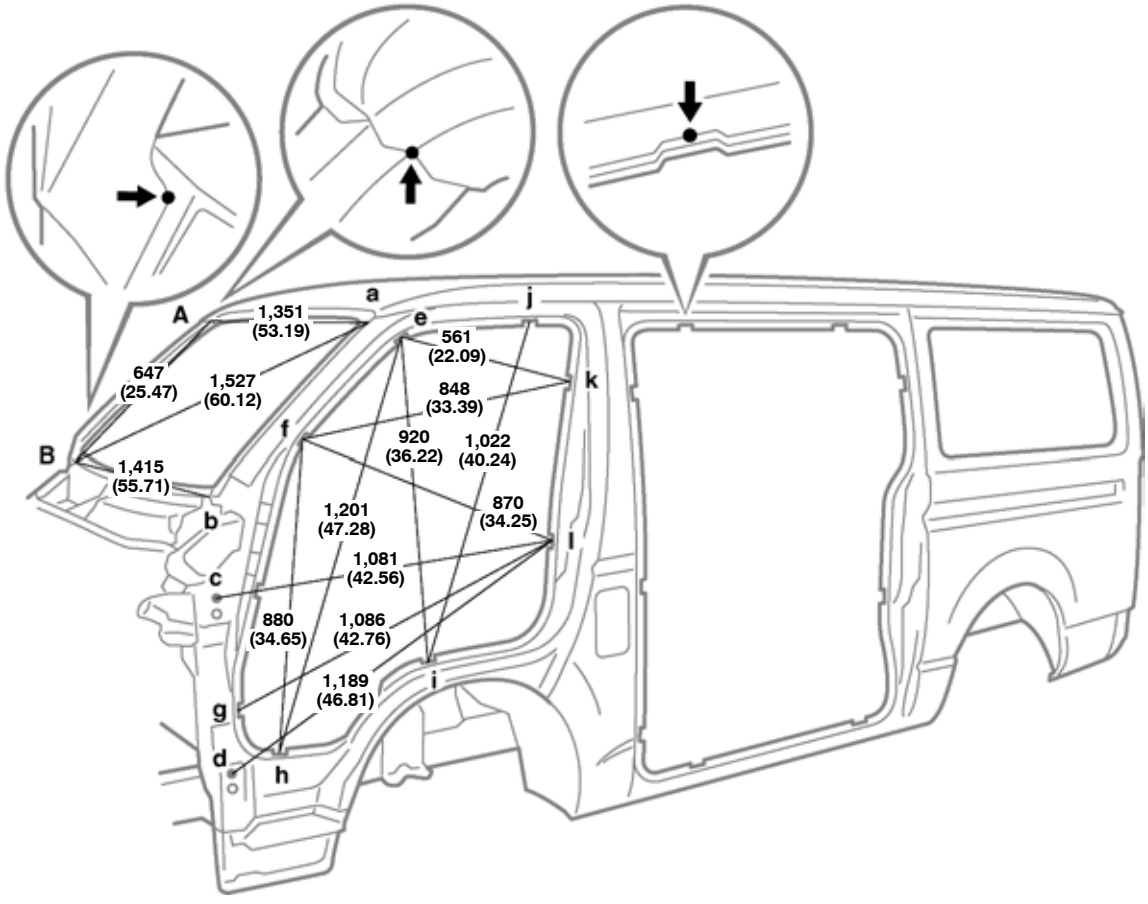

Vehicle Dimensions Left ↔ Right

E-e	F-f	G-g	H-h	I-i	J-j	K-k	L-l
1,376 (54.17)	1,454 (57.24)	1,458 (57.40)	1,462 (57.56)	1,480 (58.27)	1,368 (53.86)	1,453 (57.20)	1,463 (57.60)

E-g or e-G	E-i or e-I	E-k or e-K	G-k or g-K	G-l or g-L	I-j or i-J	I-k or i-K
1,824 (71.81)	1,698 (66.85)	1,522 (59.92)	1,993 (78.46)	1,820 (71.65)	1,752 (68.98)	1,705 (67.13)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel/Front body pillar adjoining portion	—	G, g	Front body pillar assembly mark	—
B, b	Front body pillar/Cowl top panel adjoining portion	—	H, h	Rocker panel assembly mark	—
C, c	Front door hinge installation nut	8 (0.32) nut	I, i	Rocker panel assembly mark	—
D, d	Front door hinge installation nut	8 (0.32) nut	J, j	Roof side rail assembly mark	—
E, e	Front body pillar assembly mark	—	K, k	Center body pillar assembly mark	—
F, f	Front body pillar assembly mark	—	L, l	Center body pillar assembly mark	—

BODY OPENING AREAS (Side View: Front) (Wide body)

(Three-Dimensional Distance)

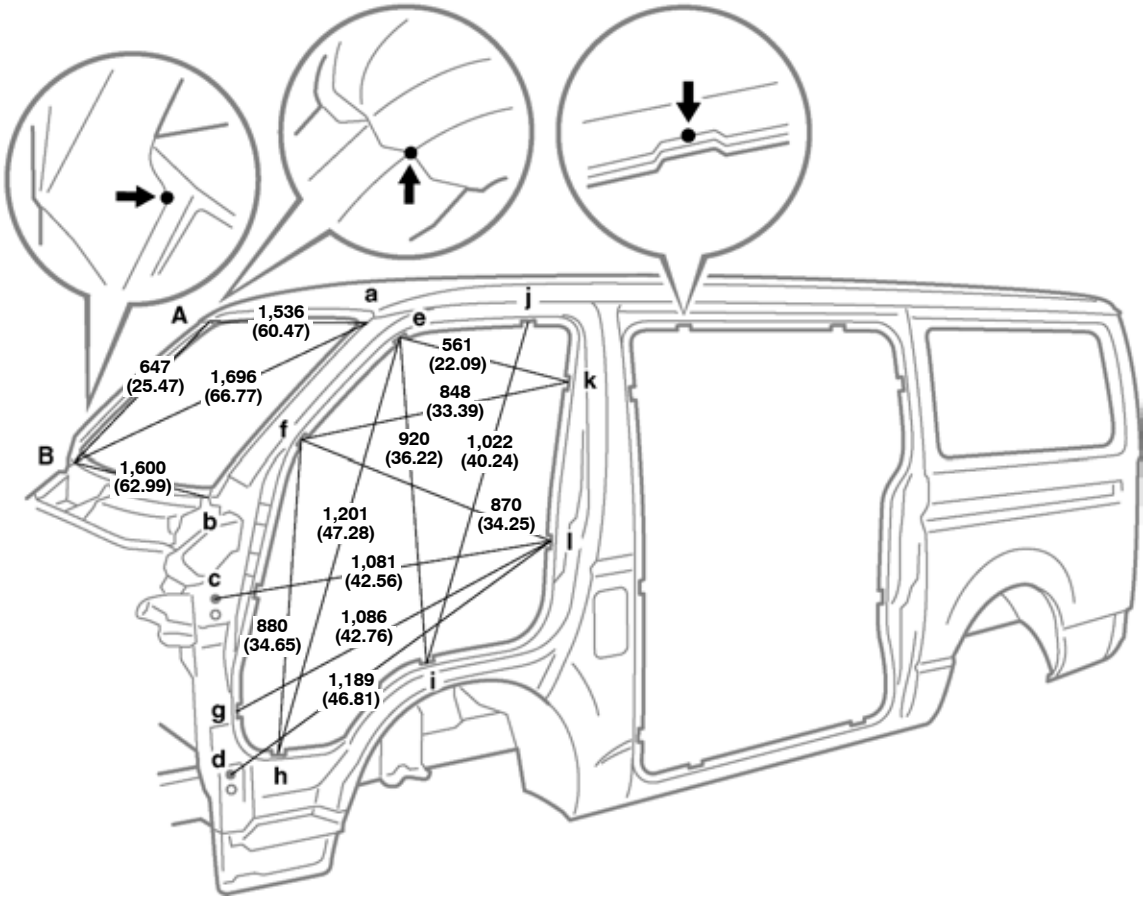

Vehicle Dimensions Left ↔ Right

E-e	F-f	G-g	H-h	I-i	J-j	K-k	L-l
1,561 (61.46)	1,639 (64.53)	1,643 (64.69)	1,647 (64.84)	1,665 (65.55)	1,553 (61.14)	1,638 (64.49)	1,648 (64.88)

E-g or e-G	E-i or e-I	E-k or e-K	G-k or g-K	G-l or g-L	I-j or i-J	I-k or i-K
1,971 (77.60)	1,856 (73.07)	1,695 (66.73)	2,132 (83.94)	1,972 (77.64)	1,905 (75.00)	1,867 (73.50)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel/Front body pillar adjoining portion	—	G, g	Front body pillar assembly mark	—
B, b	Front body pillar/Cowl top panel adjoining portion	—	H, h	Rocker panel assembly mark	—
C, c	Front door hinge installation nut	8 (0.32) nut	I, i	Rocker panel assembly mark	—
D, d	Front door hinge installation nut	8 (0.32) nut	J, j	Roof side rail assembly mark	—
E, e	Front body pillar assembly mark	—	K, k	Center body pillar assembly mark	—
F, f	Front body pillar assembly mark	—	L, l	Center body pillar assembly mark	—

BODY OPENING AREAS (Side View: Front) (Super long body)

(Three-Dimensional Distance)

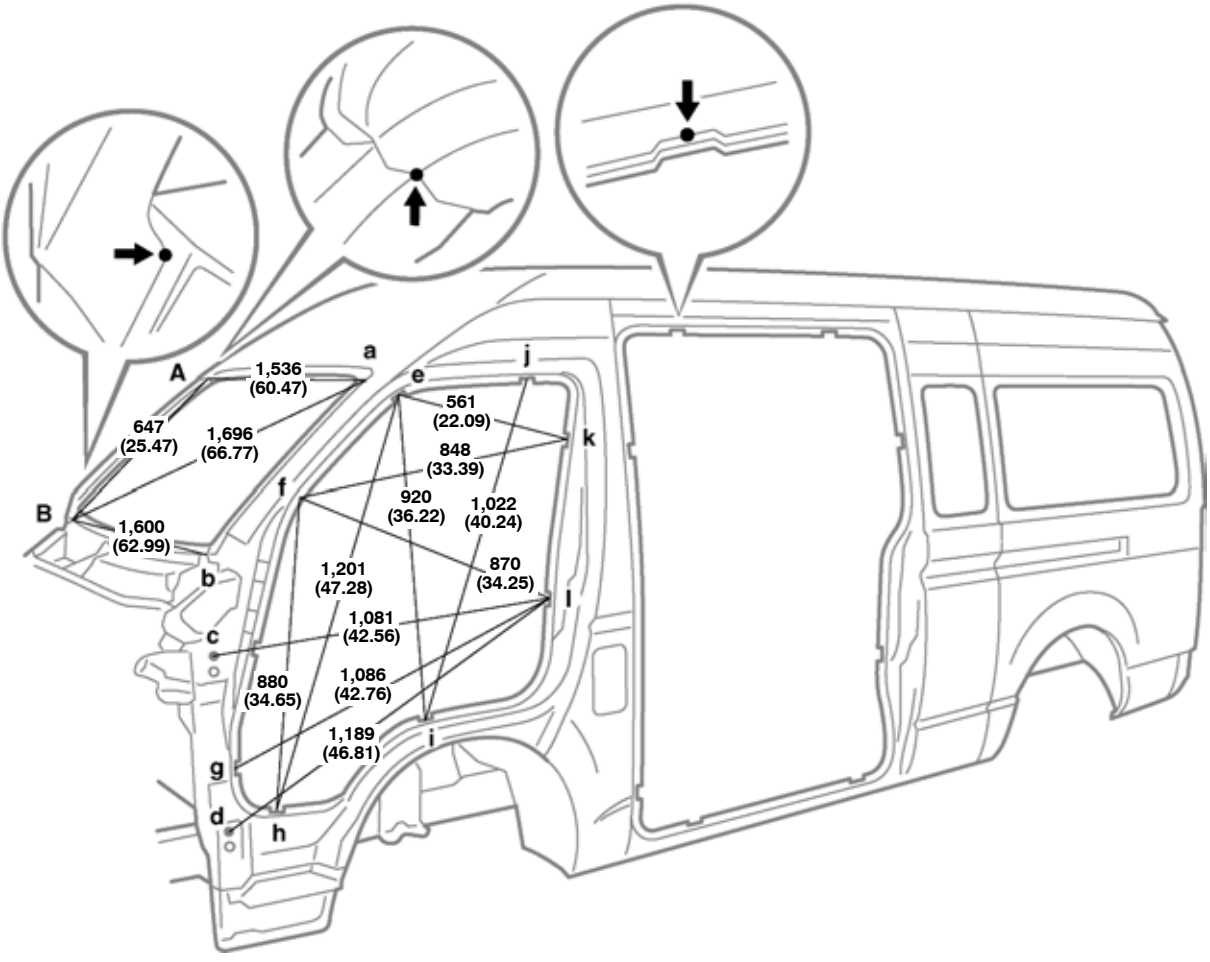

Vehicle Dimensions Left ↔ Right

E-e	F-f	G-g	H-h	I-i	J-j	K-k	L-l
1,561 (61.46)	1,639 (64.53)	1,643 (64.69)	1,647 (64.84)	1,665 (65.55)	1,553 (61.14)	1,638 (64.49)	1,648 (64.88)

E-g or e-G	E-i or e-I	E-k or e-K	G-k or g-K	G-l or g-L	I-j or i-J	I-k or i-K
1,971 (77.60)	1,856 (73.07)	1,695 (66.73)	2,132 (83.94)	1,972 (77.64)	1,905 (75.00)	1,867 (73.50)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel/Front body pillar adjoining portion	—	G, g	Front body pillar assembly mark	—
B, b	Front body pillar/Cowl top panel adjoining portion	—	H, h	Rocker panel assembly mark	—
C, c	Front door hinge installation nut	8 (0.32) nut	I, i	Rocker panel assembly mark	—
D, d	Front door hinge installation nut	8 (0.32) nut	J, j	Roof side rail assembly mark	—
E, e	Front body pillar assembly mark	—	K, k	Center body pillar assembly mark	—
F, f	Front body pillar assembly mark	—	L, l	Center body pillar assembly mark	—

BODY OPENING AREAS (Side View: Rear) (Standard body)

(Three-Dimensional Distance)

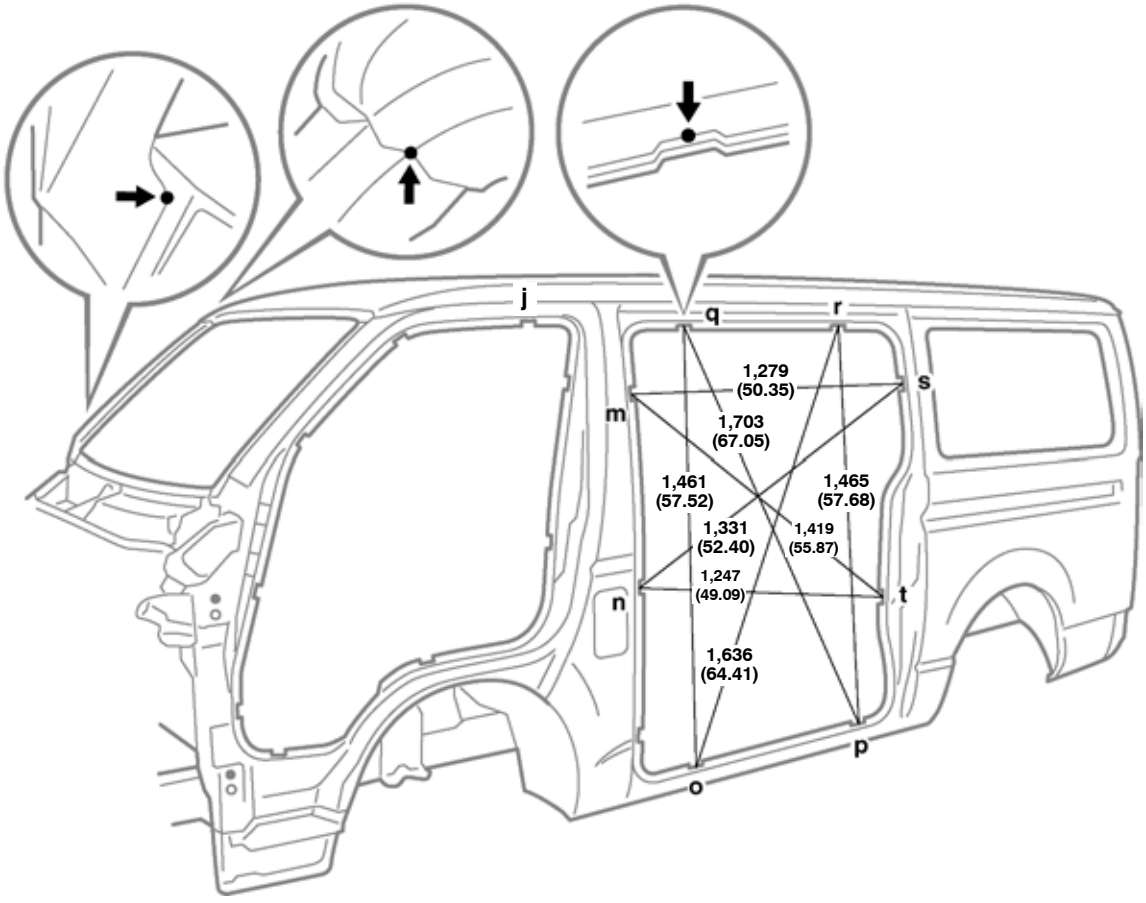

Vehicle Dimensions Left ↔ Right

M-m	N-n	O-o	P-p	Q-q	R-r	S-s	T-t
1,475 (58.07)	1,507 (59.33)	1,532 (60.31)	1,532 (60.31)	1,375 (54.13)	1,376 (54.17)	1,485 (58.46)	1,493 (58.78)

J-r or j-R	M-n or m-N	M-s or m-S	N-r or n-R	N-t or n-T	S-t or s-T
1,906 (75.04)	1,545 (60.83)	1,956 (77.01)	1,865 (73.43)	1,551 (61.06)	1,663 (65.47)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
M, m	Center body pillar assembly mark	—	Q, q	Roof side rail assembly mark	—
N, n	Center body pillar assembly mark	—	R, r	Roof side rail assembly mark	—
O, o	Rocker panel assembly mark	—	S, s	Quarter panel assembly mark	—
P, p	Rocker panel assembly mark	—	T, t	Quarter panel assembly mark	—

BODY OPENING AREAS (Side View: Rear) (Wide body)

(Three-Dimensional Distance)

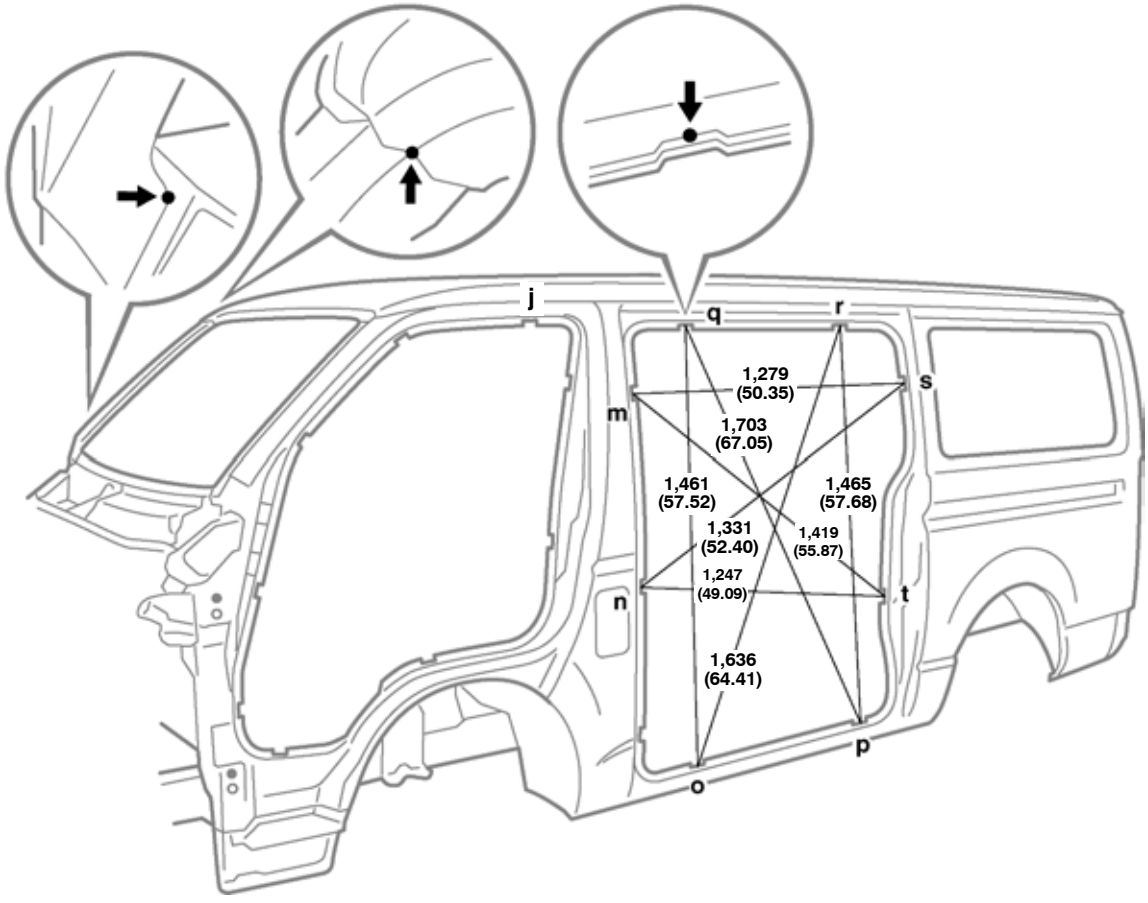

Vehicle Dimensions Left ↔ Right

M-m	N-n	O-o	P-p	Q-q	R-r	S-s	T-t
1,660 (65.35)	1,692 (66.61)	1,717 (67.60)	1,717 (67.60)	1,560 (61.42)	1,561 (61.46)	1,670 (65.75)	1,678 (66.06)

J-r, or j-R	M-n or m-N	M-s or m-S	N-r or n-R	N-t or n-T	S-t or s-T
2,044 (80.47)	1,724 (67.87)	2,099 (82.64)	2,011 (79.17)	2,096 (82.52)	1,831 (72.09)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
M, m	Center body pillar assembly mark	—	Q, q	Roof side rail assembly mark	—
N, n	Center body pillar assembly mark	—	R, r	Roof side rail assembly mark	—
O, o	Rocker panel assembly mark	—	S, s	Quarter panel assembly mark	—
P, p	Rocker panel assembly mark	—	T, t	Quarter panel assembly mark	—

BODY OPENING AREAS (Side View: Rear) (Super long body)

(Three-Dimensional Distance)

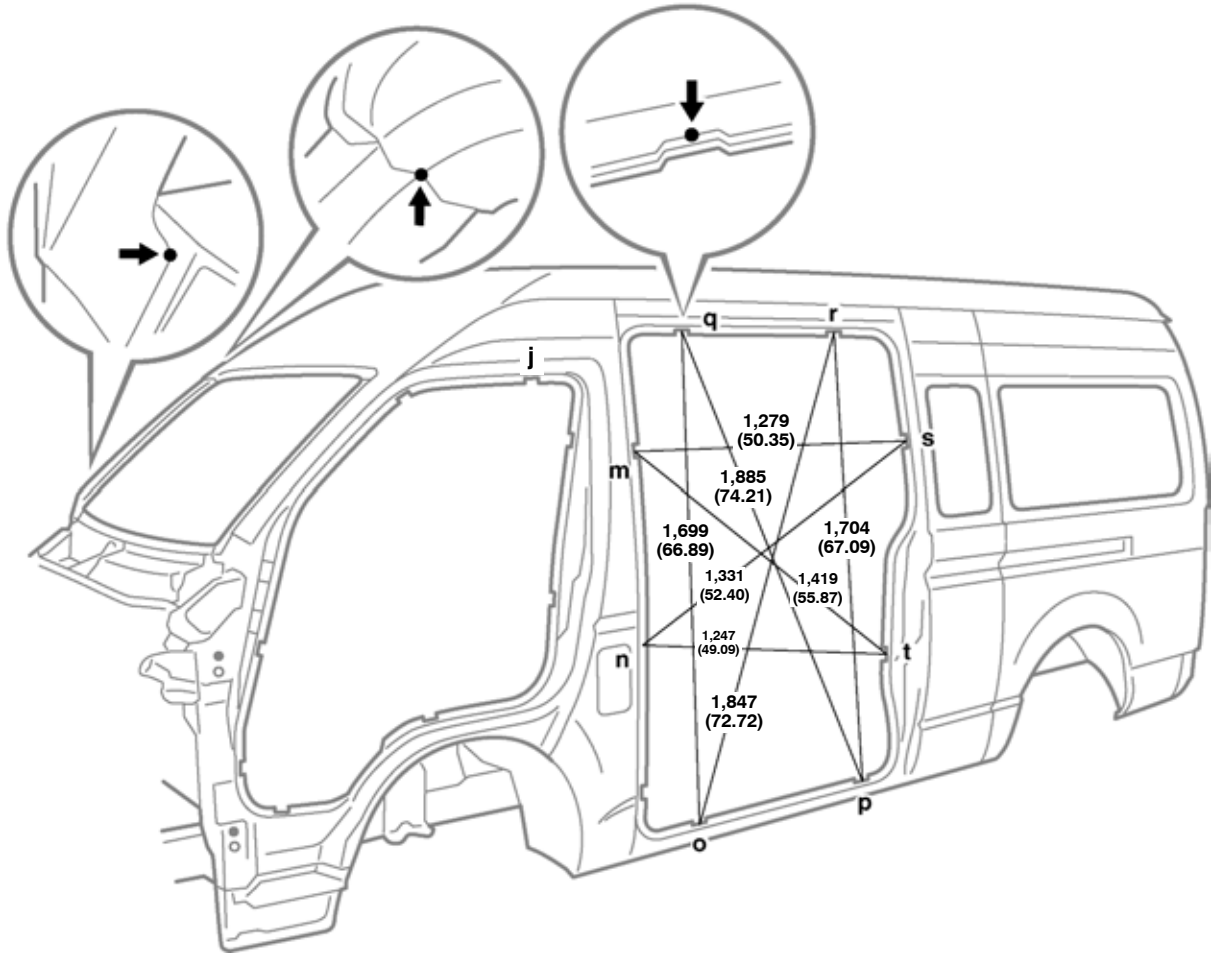

Vehicle Dimensions Left ↔ Right

M-m	N-n	O-o	P-p	Q-q	R-r	S-s	T-t
1,660 (65.35)	1,692 (66.61)	1,717 (67.60)	1,717 (67.60)	1,560 (61.42)	1,561 (61.46)	1,670 (65.75)	1,678 (66.06)

J-r or j-R	M-n or m-N	M-s or m-S	N-r or n-R	N-t or n-T	S-t or s-T
1,990 (78.35)	1,724 (67.87)	2,099 (82.64)	2,035 (80.12)	2,096 (82.52)	1,831 (72.09)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
M, m	Center body pillar assembly mark	—	Q, q	Roof side rail assembly mark	—
N, n	Center body pillar assembly mark	—	R, r	Roof side rail assembly mark	—
O, o	Rocker panel assembly mark	—	S, s	Quarter panel assembly mark	—
P, p	Rocker panel assembly mark	—	T, t	Quarter panel assembly mark	—

BODY OPENING AREAS (Rear View)
STANDARD BODY (Standard Roof)

(Three-Dimensional Distance)

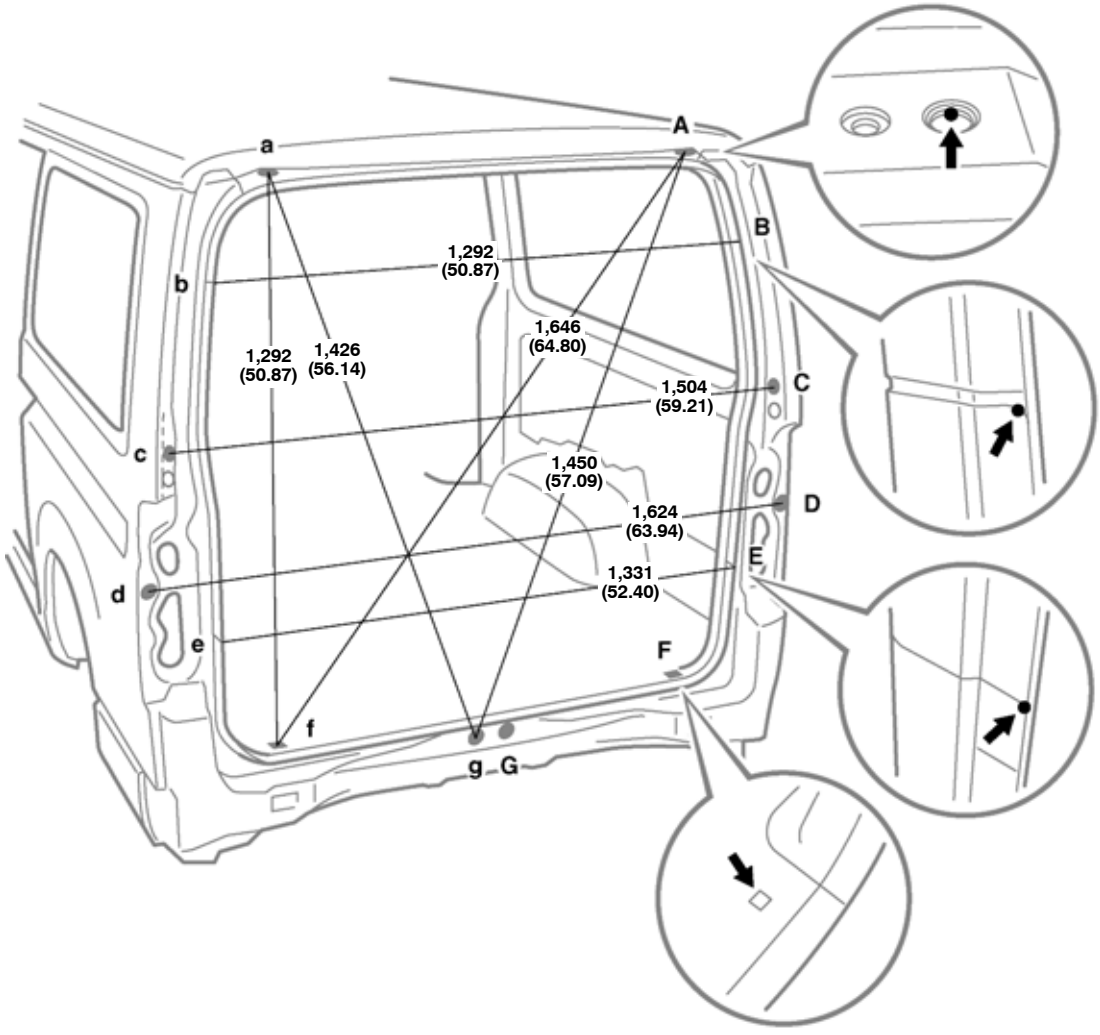


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Back door hinge installation hole-outer	11 (0.43)	E, e	Quarter inner panel/rear floor panel brace adjoining portion	—
B, b	Quarter panel inner extension/quarter inner panel adjoining portion	—	F, f	Rear floor scuff plate installation hole	8.5 (0.33) square
C, c	Back door damper stay installation nut	8 (0.32) nut	G, g	Back door lock striker installation nut	8 (0.32) nut
D, d	Raer combination light installation hole	12 (0.47) × 8 (0.32)	—	—	—

BODY OPENING AREAS (Rear View)
STANDARD BODY (High Roof)

(Three-Dimensional Distance)

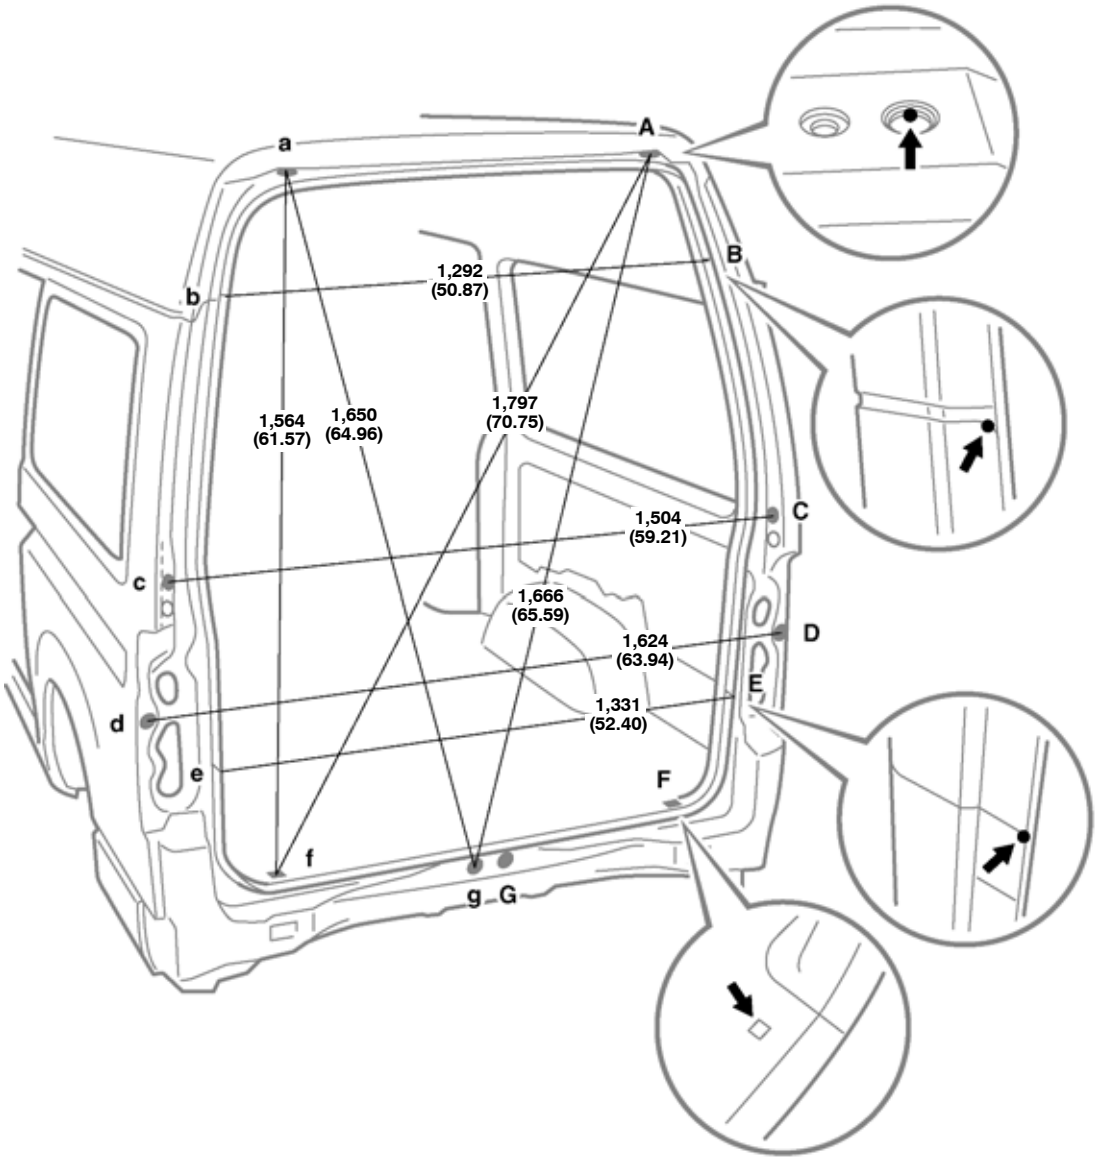


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Back door hinge installation hole-outer	11 (0.43)	E, e	Quarter inner panel/rear floor panel brace adjoining portion	—
B, b	Quarter panel inner extension/quarter inner panel adjoining portion	—	F, f	Rear floor scuff plate installation hole	8.5 (0.33) square
C, c	Back door damper stay installation nut	8 (0.32) nut	G, g	Back door lock striker installation nut	8 (0.32) nut
D, d	Raer combination light installation hole	12 (0.47) × 8 (0.32)	—	—	—

BODY OPENING AREAS (Rear View)
STANDARD BODY (Middle Roof)

(Three-Dimensional Distance)

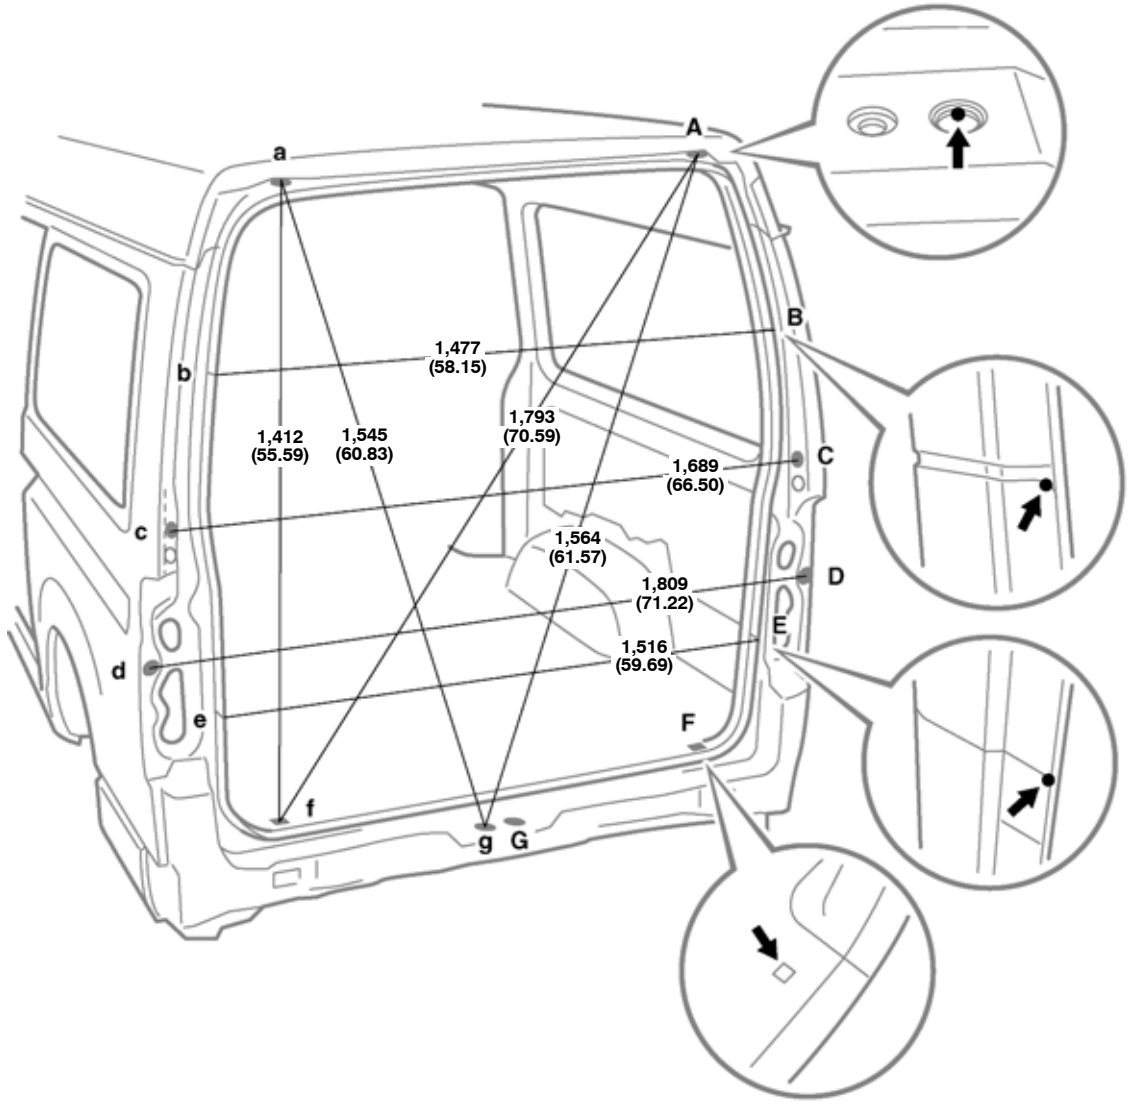


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Back door hinge installation hole-outer	11 (0.43)	E, e	Quarter inner panel/rear floor panel brace adjoining portion	—
B, b	Quarter panel inner extension/quarter inner panel adjoining portion	—	F, f	Rear floor scuff plate installation hole	8.5 (0.33) square
C, c	Back door damper stay installation nut	8 (0.32) nut	G, g	Back door lock striker installation nut	8 (0.32) nut
D, d	Raer combination light installation hole	12 (0.47) × 8 (0.32)	—	—	—

BODY OPENING AREAS (Rear View)
SUPER LONG BODY (High Roof)

(Three-Dimensional Distance)

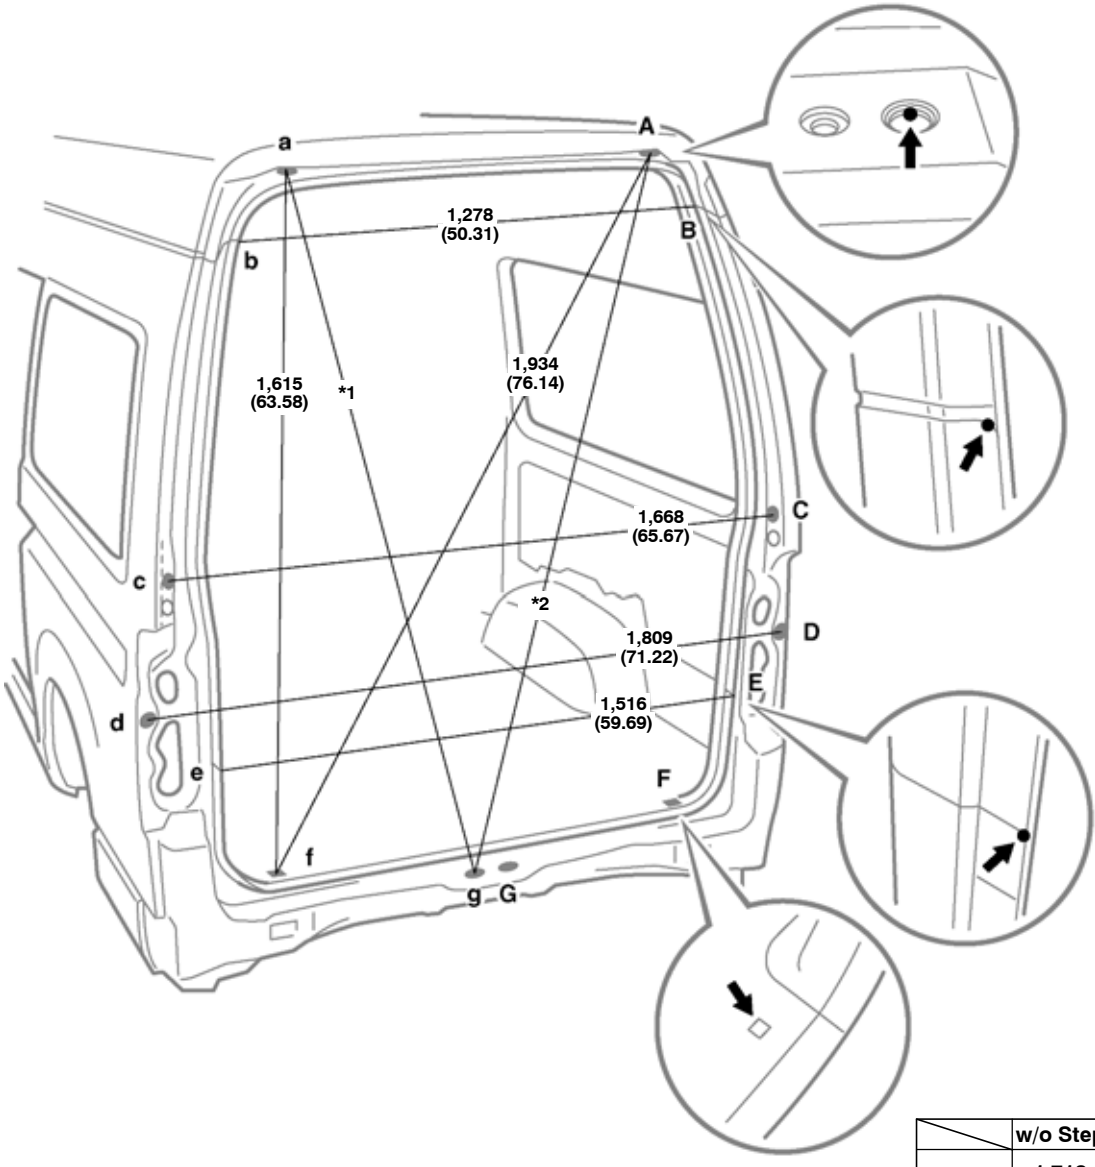

	w/o Step	w/ Step
*1	1,718 (67.64)	1,731 (68.15)
*2	1,737 (68.39)	1,746 (68.74)

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Back door hinge installation hole-outer	11 (0.43)	E, e	Quarter inner panel/rear floor panel brace adjoining portion	—
B, b	Quarter panel inner extension/quarter inner panel adjoining portion	—	F, f	Rear floor scuff plate installation hole	8.5 (0.33) square
C, c	Back door damper stay installation nut	8 (0.32) nut	G, g	Back door lock striker installation nut	8 (0.32) nut
D, d	Rear combination light installation hole	12 (0.47) × 8 (0.32)	—	—	—

UNDER BODY
(Standard body)

(Three-Dimensional Distance)


Vehicle Dimensions Left ↔ Right

B-b	D-E	d-e	D-e or d-E	E-g	e-G
1,016 (40.00)	511 (20.12)	512 (20.16)	803 (31.61)	1,279 (50.35)	1,280 (50.39)

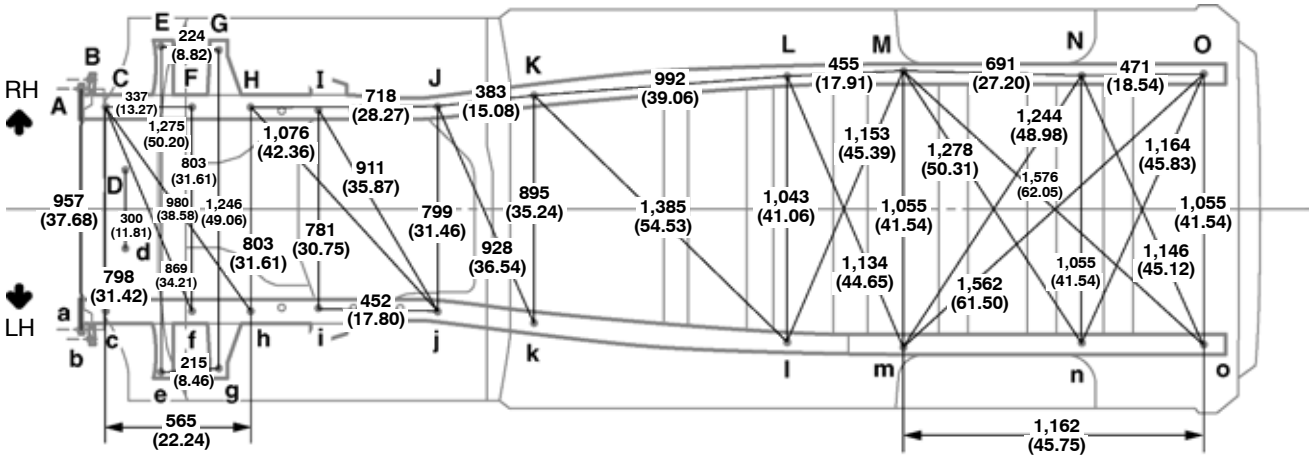

Front

1	2	3
100 (3.94)	100 (3.94)	100 (3.94)

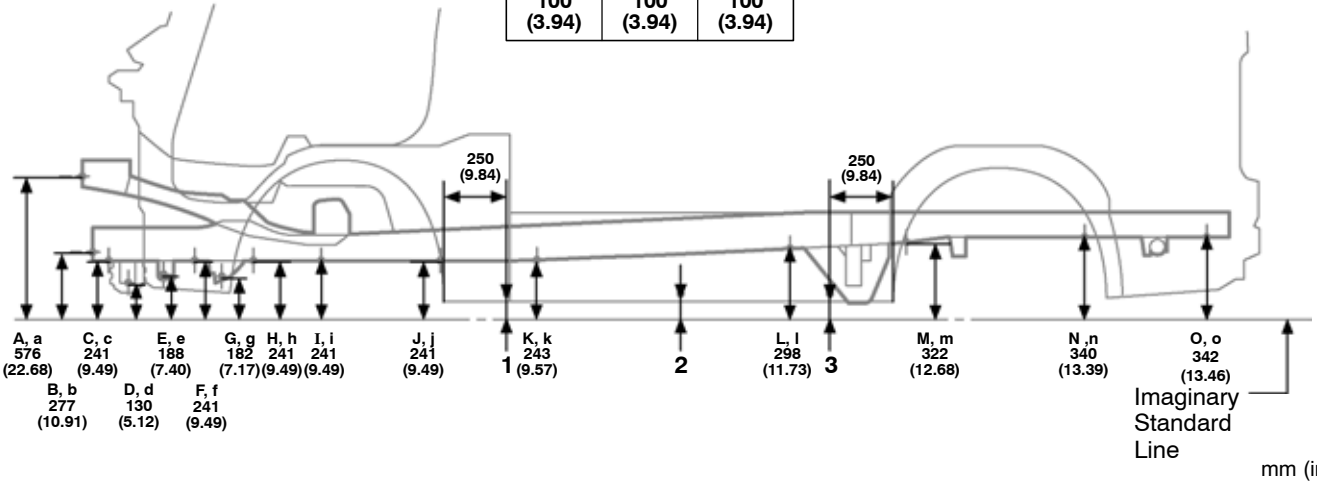

mm (in.)


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front bumper reinforcement installation nut	10 (0.39) nut	I, i	Front frame installation nut	14 (0.55) nut
B, b	Front bumper reinforcement installation nut	10 (0.39) nut	J, j	Front frame installation nut	14 (0.55) nut
C, c	Front sidemember standard hole	20 (0.79)	K, k	Front sidemember standard hole	22 (0.87)
D, d	Front crossmember standard hole	16 (0.63)	L, l	Front sidemember standard hole	20 (0.79)
E, e	Front crossmember front extension standard hole	10 (0.39)	M, m	Rear sidemember standard hole	13 (0.51)
F, f	Front sidemember standard hole	20 (0.79)	N, n	Rear sidemember standard hole	13 (0.51)
G, g	Front crossmember rear extension standard hole	20 (0.79)	O, o	Rear floor sidemember standard hole	10 (0.39)
H, h	Front sidemember standard hole	15 (0.59)	—	—	—

UNDER BODY (Cont'd)
(Wide body)

(Three-Dimensional Distance)


Vehicle Dimensions Left ↔ Right

B-b	D-E	d-e	D-e or d-E	E-g or e-G
1,201 (47.28)	600 (23.62)	601 (23.66)	894 (35.20)	1,462 (57.56)

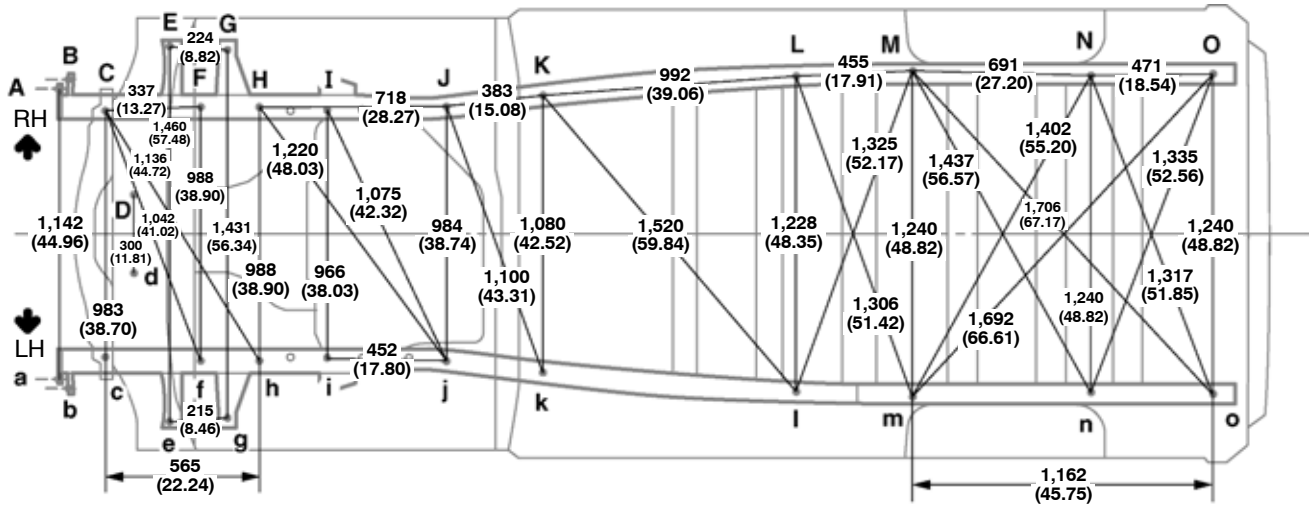

Front

1	2	3
100 (3.94)	100 (3.94)	100 (3.94)

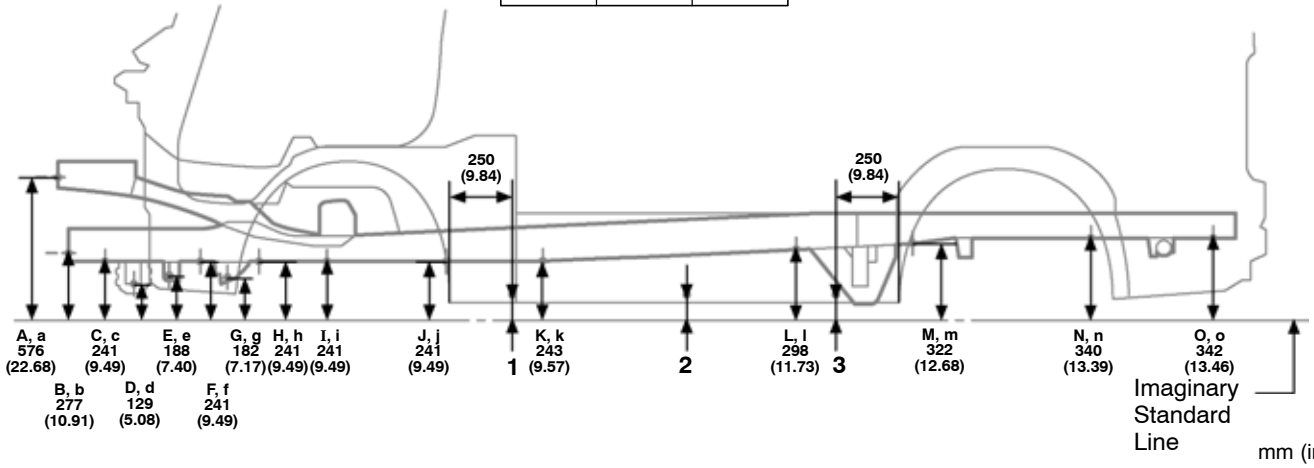

mm (in.)


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front bumper reinforcement installation nut	10 (0.39) nut	I, i	Front frame installation nut	14 (0.55) nut
B, b	Front bumper reinforcement installation nut	10 (0.39) nut	J, j	Front frame installation nut	14 (0.55) nut
C, c	Front sidemember standard hole	20 (0.79)	K, k	Front sidemember standard hole	22 (0.87)
D, d	Front crossmember standard hole	16 (0.63)	L, l	Front sidemember standard hole	20 (0.79)
E, e	Front crossmember front extension standard hole	10 (0.39)	M, m	Rear sidemember standard hole	13 (0.51)
F, f	Front sidemember standard hole	20 (0.79)	N, n	Rear sidemember standard hole	13 (0.51)
G, g	Front crossmember rear extension standard hole	20 (0.79)	O, o	Rear floor sidemember standard hole	10 (0.39)
H, h	Front sidemember standard hole	15 (0.59)	—	—	—

UNDER BODY (Cont'd)
(Super long body)

(Three-Dimensional Distance)


Vehicle Dimensions Left ↔ Right

B-b	D-E	d-e	D-e or d-E	E-g or e-G
1,201 (47.28)	600 (23.62)	601 (23.66)	894 (35.20)	1,462 (57.56)

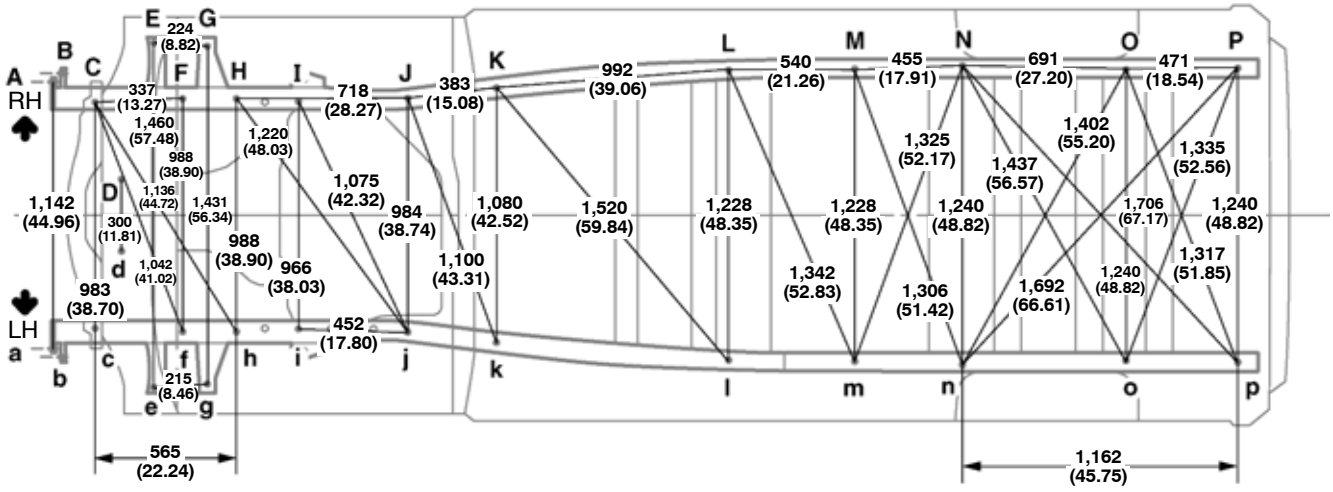

Front

1	2	3
100 (3.94)	100 (3.94)	100 (3.94)

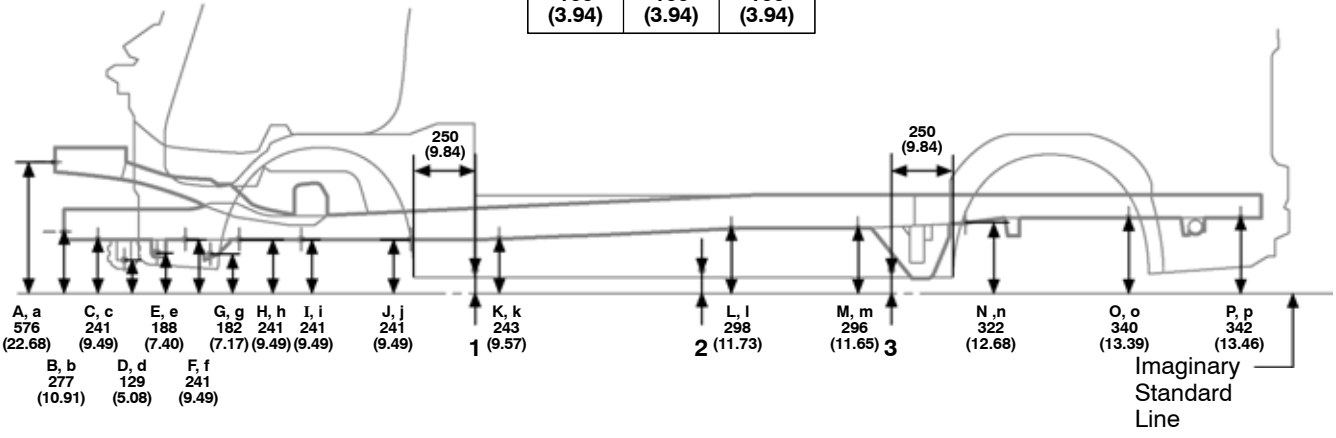


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front bumper reinforcement installation nut	10 (0.39) nut	I, i	Front frame installation nut	14 (0.55) nut
B, b	Front bumper reinforcement installation nut	10 (0.39) nut	J, j	Front frame installation nut	14 (0.55) nut
C, c	Front sidemember standard hole	20 (0.79)	K, k	Front sidemember standard hole	22 (0.87)
D, d	Front crossmember standard hole	16 (0.63)	L, l	Front sidemember standard hole	20 (0.79)
E, e	Front crossmember front extension standard hole	10 (0.39)	M, m	Rear sidemember standard hole	13 (0.51)
F, f	Front sidemember standard hole	20 (0.79)	N, n	Rear sidemember standard hole	13 (0.51)
G, g	Front crossmember rear extension standard hole	20 (0.79)	O, o	Rear floor sidemember standard hole	10 (0.39)
H, h	Front sidemember standard hole	15 (0.59)	—	—	—

UNDER BODY (Cont'd)
(Standard body)


(Two-Dimensional Distance)

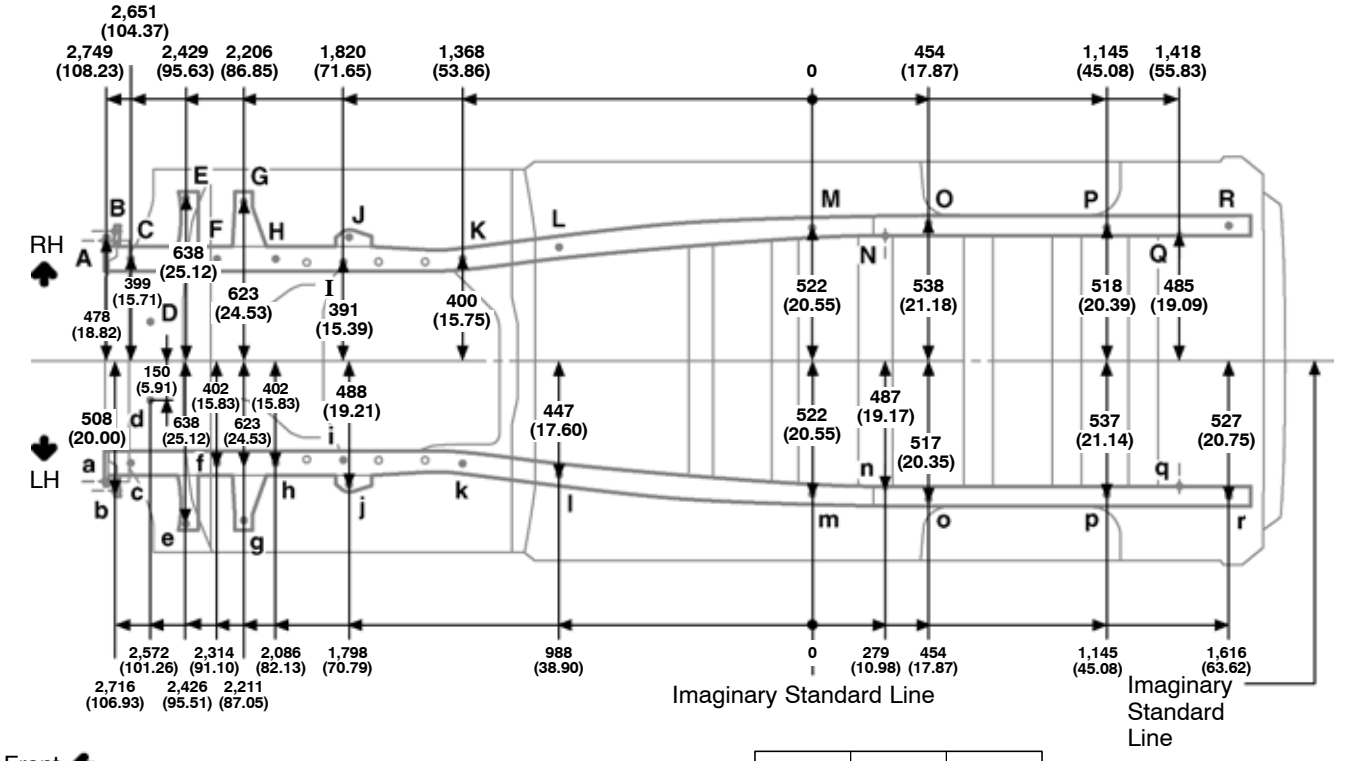

Front

Wheel base	2,570 (101.18)

1	2	3
100 (3.94)	100 (3.94)	100 (3.94)

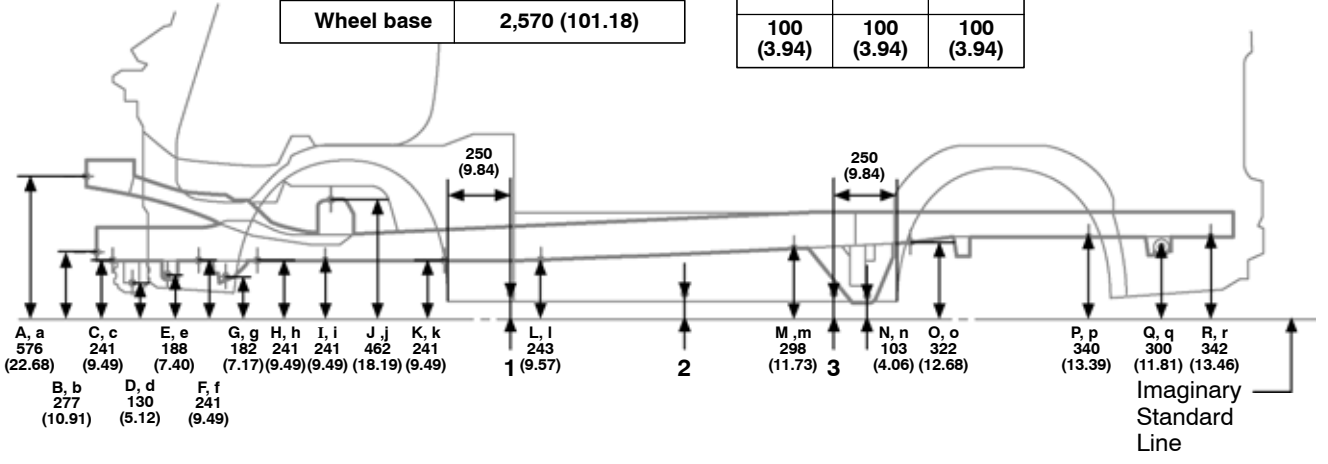


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front bumper reinforcement installation nut	10 (0.39) nut	J, j	Front shock absorber installation hole	19 (0.75)
B, b	Front bumper reinforcement installation nut	10 (0.39) nut	K, k	Front frame installation nut	14 (0.55) nut
C, c	Front sidemember standard hole	20 (0.79)	L, l	Front sidemember standard hole	22 (0.87)
D, d	Front crossmember standard hole	16 (0.63)	M, m	Front sidemember standard hole	20 (0.79)
E, e	Front crossmember front extension standard hole	10 (0.39)	N, n	Leaf spring installation hole-inner	15.5 (0.61)
F, f	Front sidemember standard hole	20 (0.79)	O, o	Rear sidemember standard hole	13 (0.51)
G, g	Front crossmember rear extension standard hole	20 (0.79)	P, p	Rear sidemember standard hole	13 (0.51)
H, h	Front sidemember standard hole	15 (0.59)	Q, q	Rear spring hanger installation hole-inner	30 (1.18)
I, i	Front frame installation nut	14 (0.55) nut	R, r	Rear floor sidemember standard hole	10 (0.39)


UNDER BODY (Cont'd)
(Wide body)

(Two-Dimensional Distance)

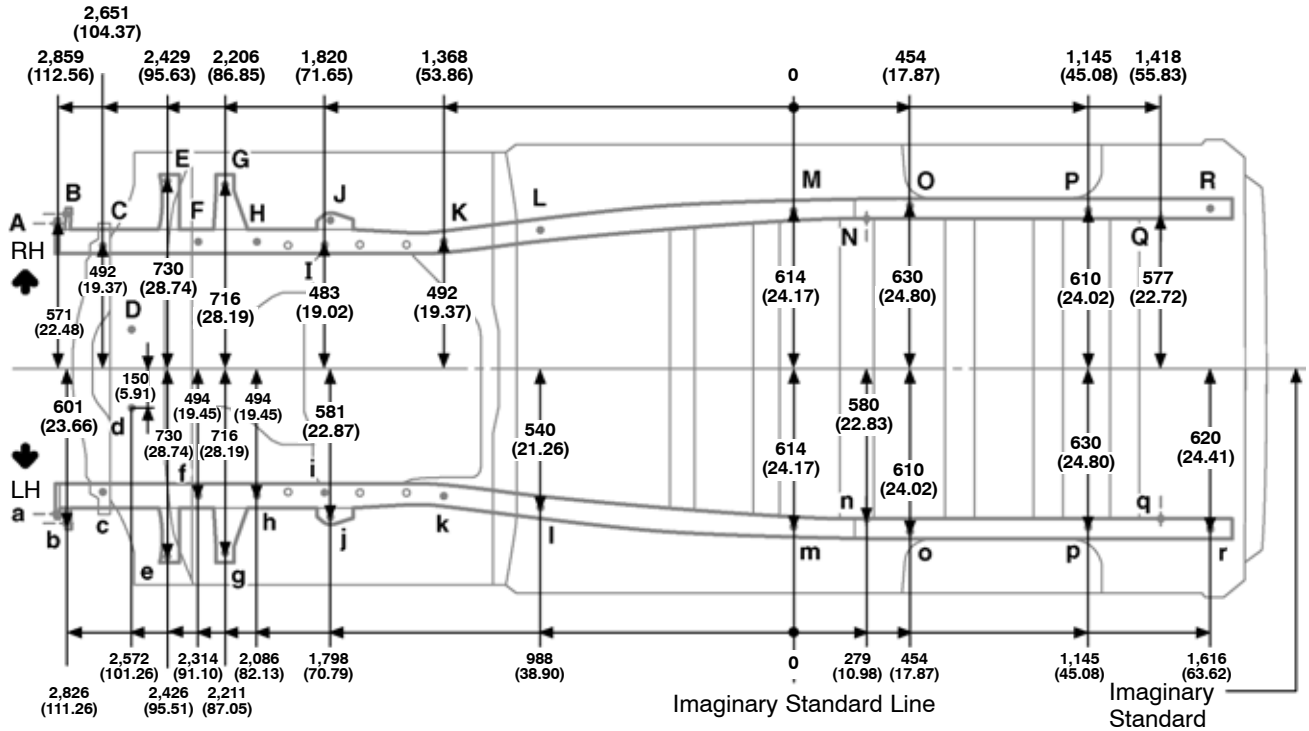

Wheel base	2,570 (101.18)

1	2	3
100 (3.94)	100 (3.94)	100 (3.94)

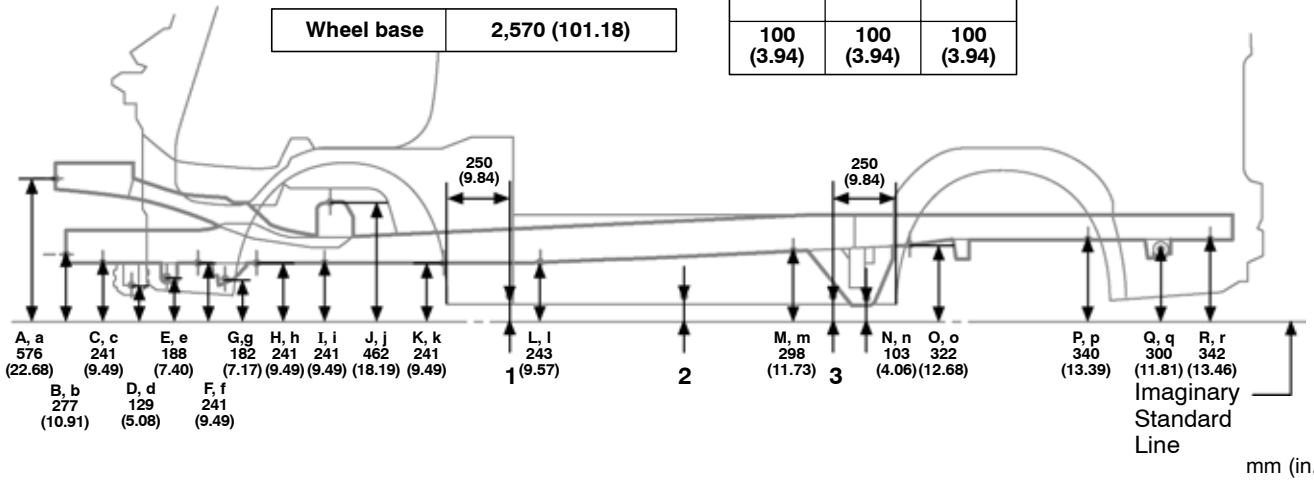


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front bumper reinforcement installation nut	10 (0.39) nut	J, j	Front shock absorber installation hole	19 (0.75)
B, b	Front bumper reinforcement installation nut	10 (0.39) nut	K, k	Front frame installation nut	14 (0.55) nut
C, c	Front sidemember standard hole	20 (0.79)	L, l	Front sidemember standard hole	22 (0.87)
D, d	Front crossmember standard hole	16 (0.63)	M, m	Front sidemember standard hole	20 (0.79)
E, e	Front crossmember front extension standard hole	10 (0.39)	N, n	Leaf spring installation hole-inner	15.5 (0.61)
F, f	Front sidemember standard hole	20 (0.79)	O, o	Rear sidemember standard hole	13 (0.51)
G, g	Front crossmember rear extension standard hole	20 (0.79)	P, p	Rear sidemember standard hole	13 (0.51)
H, h	Front sidemember standard hole	15 (0.59)	Q, q	Rear spring hanger installation hole-inner	30 (1.18)
I, i	Front frame installation nut	14 (0.55) nut	R, r	Rear floor sidemember standard hole	10 (0.39)

UNDER BODY (Cont'd)
(Super long body)


(Two-Dimensional Distance)

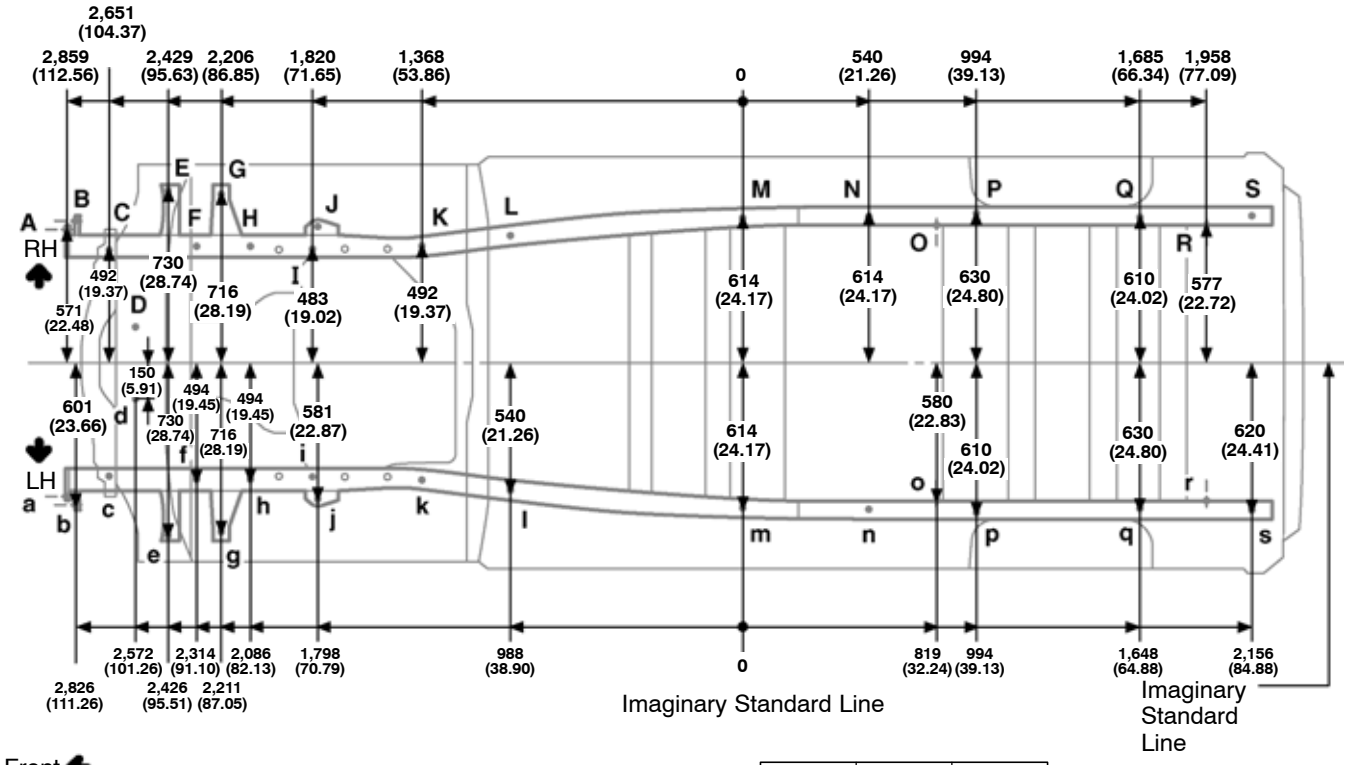

Front

Wheel base	2,570 (101.18)

1	2	3
100 (3.94)	100 (3.94)	100 (3.94)

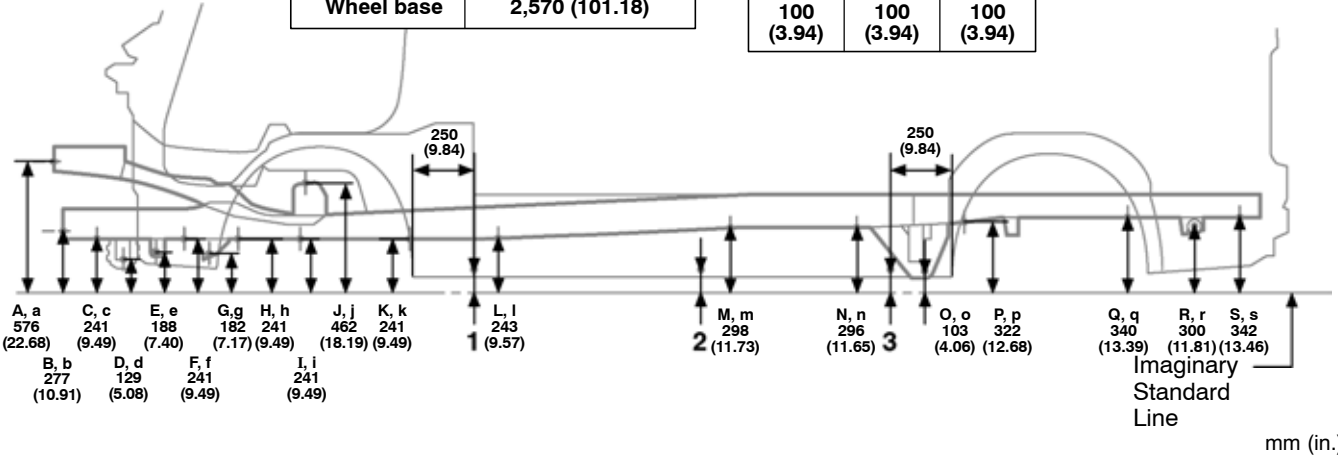

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front bumper reinforcement installation nut	10 (0.39) nut	J, j	Front shock absorber installation hole	19 (0.75)
B, b	Front bumper reinforcement installation nut	10 (0.39) nut	K, k	Front frame installation nut	14 (0.55) nut
C, c	Front sidemember standard hole	20 (0.79)	L, l	Front sidemember standard hole	22 (0.87)
D, d	Front crossmember standard hole	16 (0.63)	M, m	Front sidemember standard hole	20 (0.79)
E, e	Front crossmember front extension standard hole	10 (0.39)	N, n	Leaf spring installation hole-inner	15.5 (0.61)
F, f	Front sidemember standard hole	20 (0.79)	O, o	Rear sidemember standard hole	13 (0.51)
G, g	Front crossmember rear extension standard hole	20 (0.79)	P, p	Rear sidemember standard hole	13 (0.51)
H, h	Front sidemember standard hole	15 (0.59)	Q, q	Rear spring hanger installation hole-inner	30 (1.18)
I, i	Front frame installation nut	14 (0.55) nut	R, r	Rear floor sidemember standard hole	10 (0.39)