

FRONT FRAME

Standard body

(Three-Dimensional Distance)

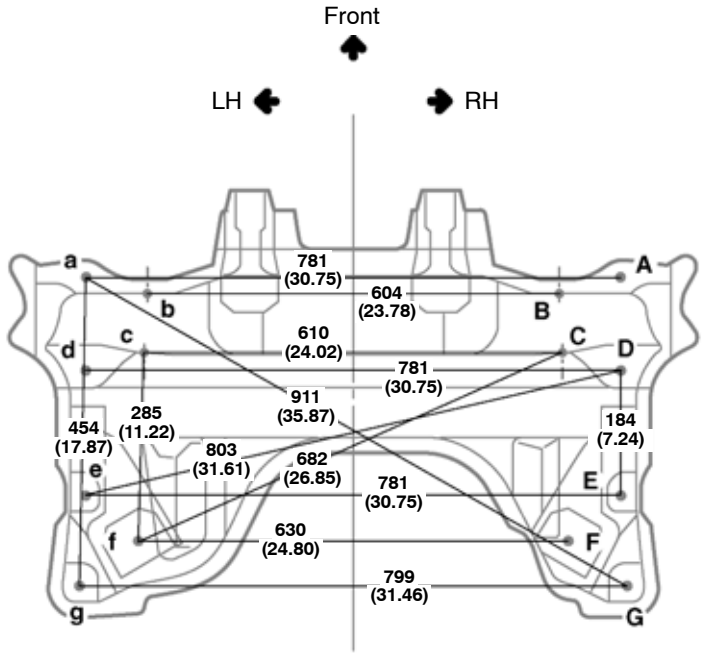

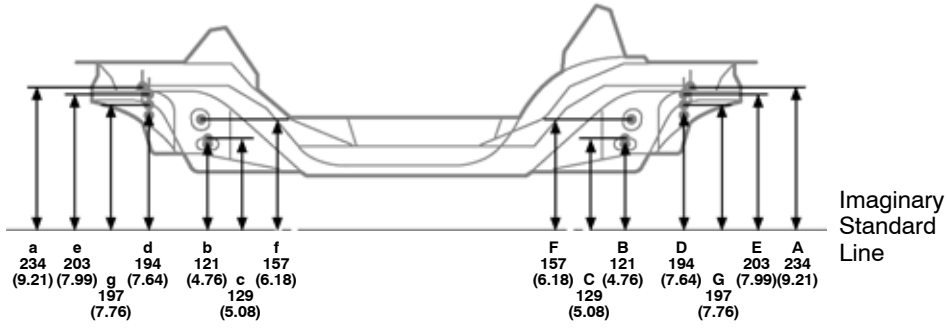



mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front suspension crossmember installation hole	20 (0.79)	E, e	Front suspension crossmember installation hole	21 (0.83)
B, b	Lower arm installation hole-front	35 (1.38) × 17 (0.67)	F, f	Strut bar installation hole	32 (1.26)
C, c	Lower arm installation hole-rear	35 (1.38) × 17 (0.67)	G, g	Front suspension crossmember installation hole	20 (0.79)
D, d	Front suspension crossmember installation hole	20 (0.79)	—	—	—

FRONT FRAME
Wide body

(Three-Dimensional Distance)

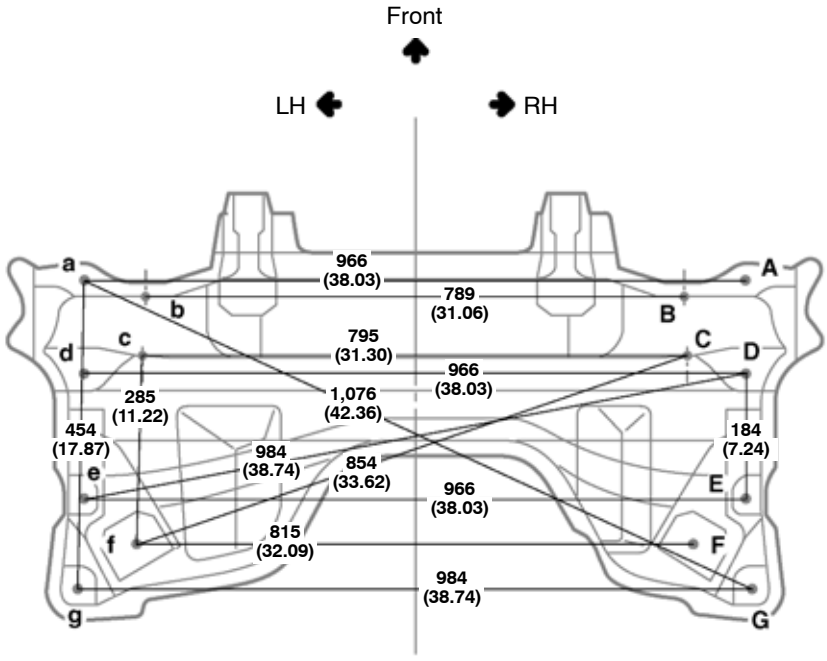

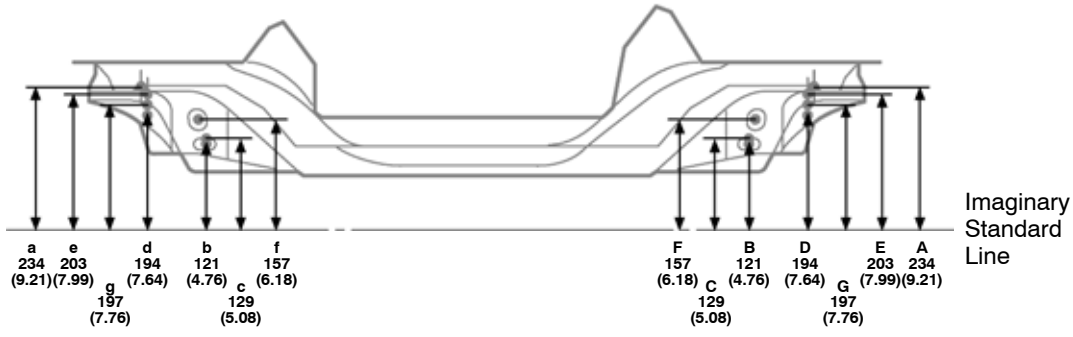



mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front suspension crossmember installation hole	20 (0.79)	E, e	Front suspension crossmember installation hole	21 (0.83)
B, b	Lower arm installation hole-front	35 (1.38) × 17 (0.67)	F, f	Strut bar installation hole	32 (1.26)
C, c	Lower arm installation hole-rear	3 (1.38) × 17 (0.67)	G, g	Front suspension crossmember installation hole	20 (0.79)
D, d	Front suspension crossmember installation hole	20 (0.79)	—	—	—

FRONT FRAME (Cont'd)
Standard body

(Two-Dimensional Distance)

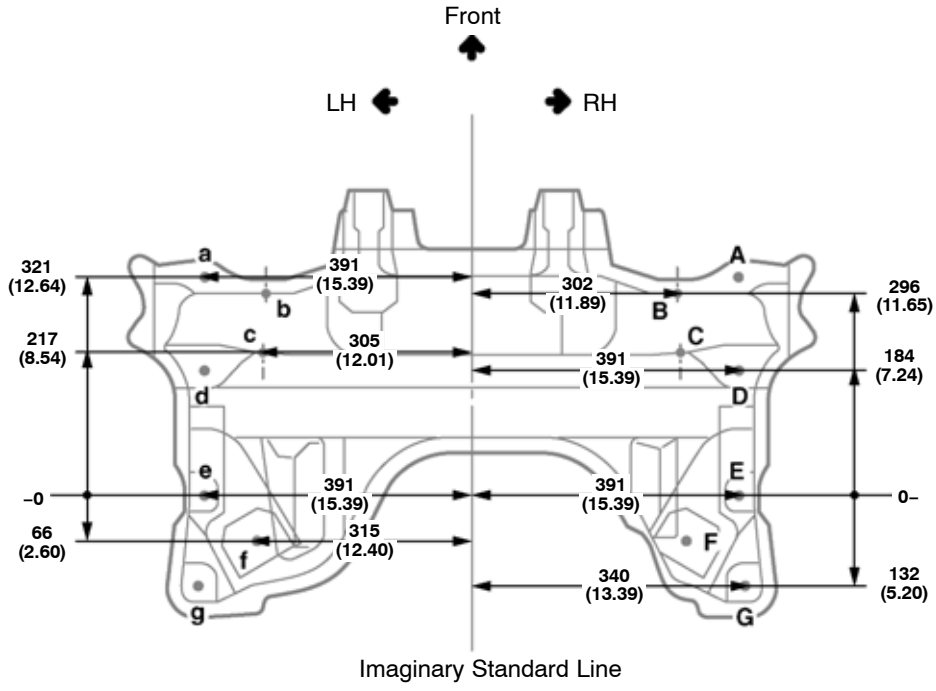

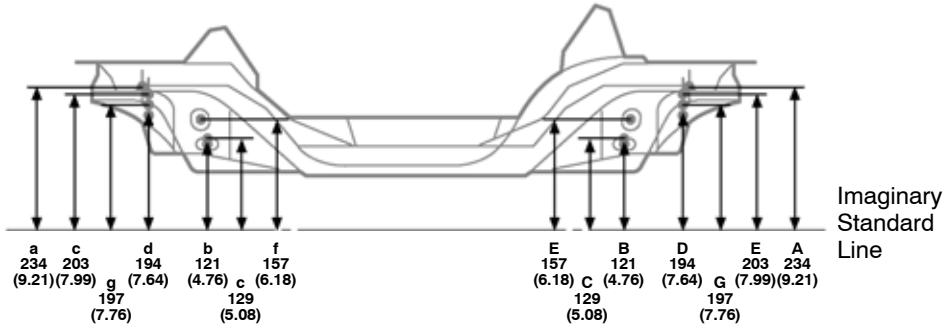



mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front suspension crossmember installation hole	20 (0.79)	E, e	Front suspension crossmember installation hole	21 (0.83)
B, b	Lower arm installation hole-front	35 (1.38) × 17 (0.67)	F, f	Strut bar installation hole	32 (1.26)
C, c	Lower arm installation hole-rear	35 (1.38) × 17 (0.67)	G, g	Front suspension crossmember installation hole	20 (0.79)
D, d	Front suspension crossmember installation hole	20 (0.79)	—	—	—

FRONT FRAME (Cont'd)
Wide body

(Two-Dimensional Distance)

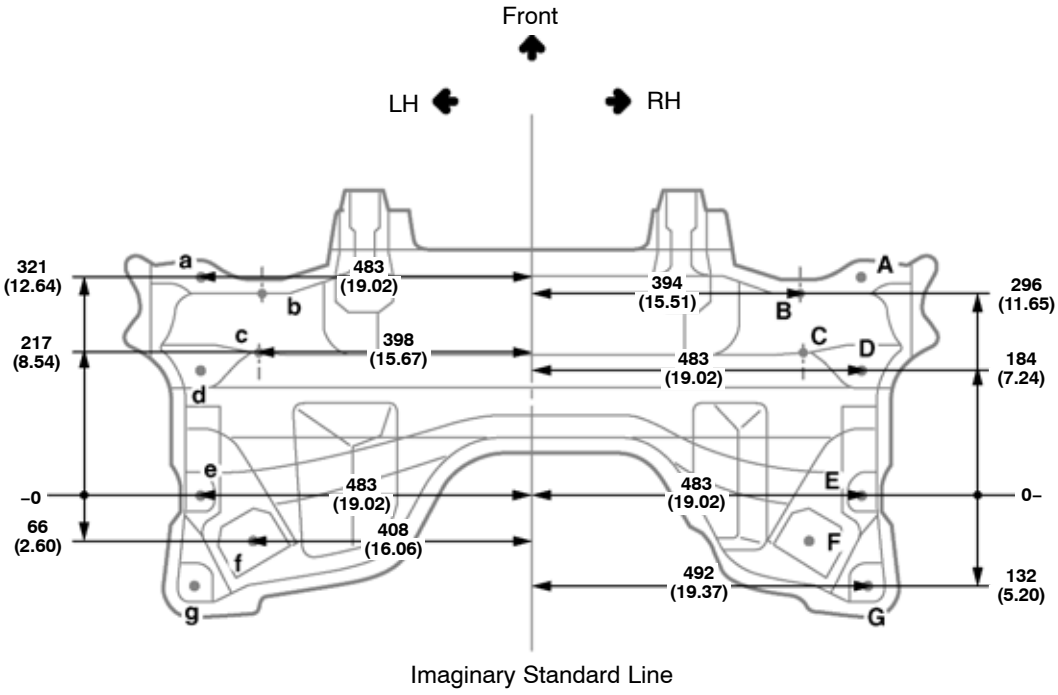

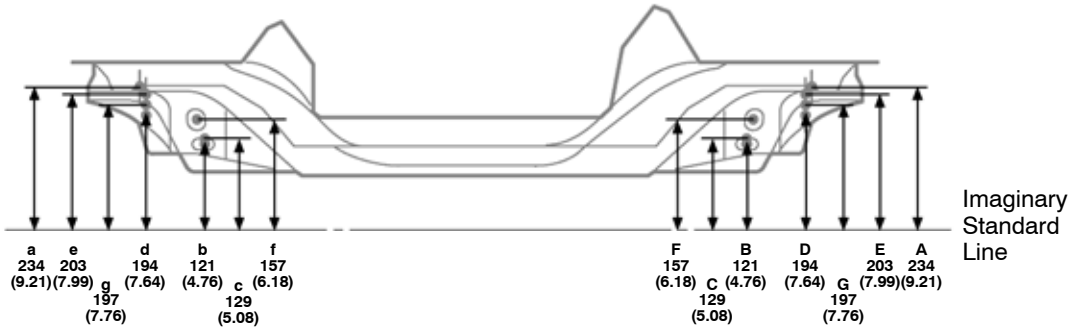

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front suspension crossmember installation hole	20 (0.79)	E, e	Front suspension crossmember installation hole	21 (0.83)
B, b	Lower arm installation hole-front	35 (1.38) × 17 (0.67)	F, f	Strut bar installation hole	32 (1.26)
C, c	Lower arm installation hole-rear	35 (1.38) × 17 (0.67)	G, g	Front suspension crossmember installation hole	20 (0.79)
D, d	Front suspension crossmember installation hole	20 (0.79)	—	—	—