
## OIL NOZZLE

### 1. Construction

- A No. 1 oil nozzle sub-assembly for cooling and lubricating the piston has been provided in the cylinder block sub-assembly.
- The No. 1 oil nozzle sub-assembly contains a check ball to prevent oil from being fed when the oil pressure is low. This prevents the overall oil pressure in the engine from dropping.

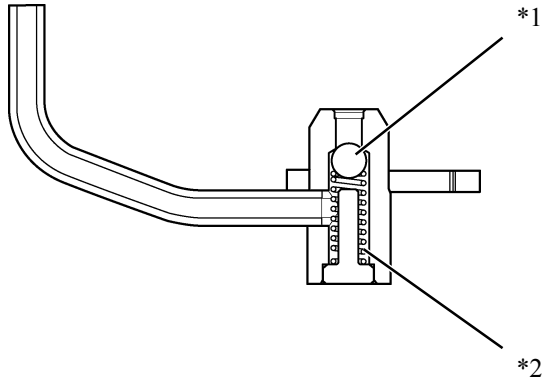


26T4EG96

**Text in Illustration**

| | | | |
|---|---|---|---|
| *1 | Check Ball | *2 | Compression Spring |