
FRONT SIDE MEMBER (CUT-P)



F16703A

REPLACEMENT
With the front crossmember No.1 reinforcement removed.


REMOVAL


(LH)

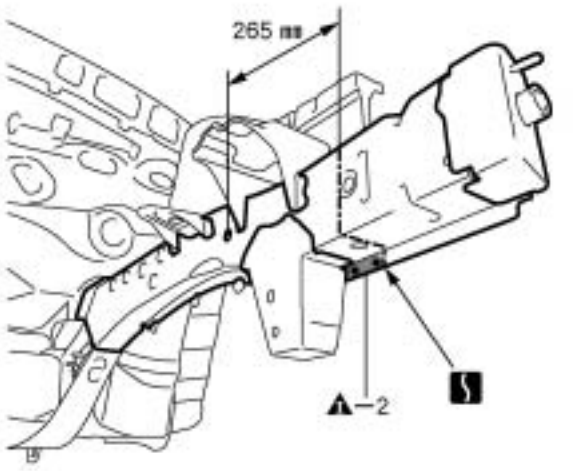

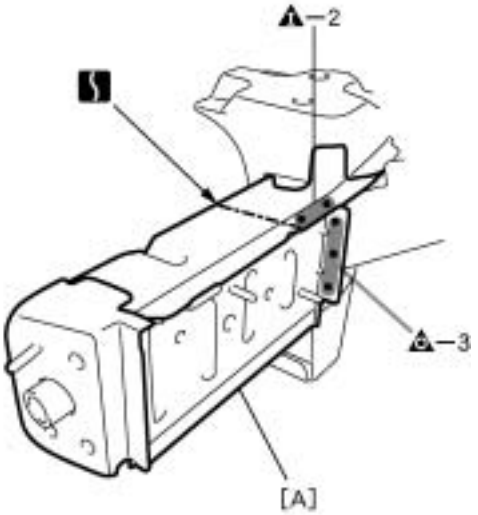

(RH)

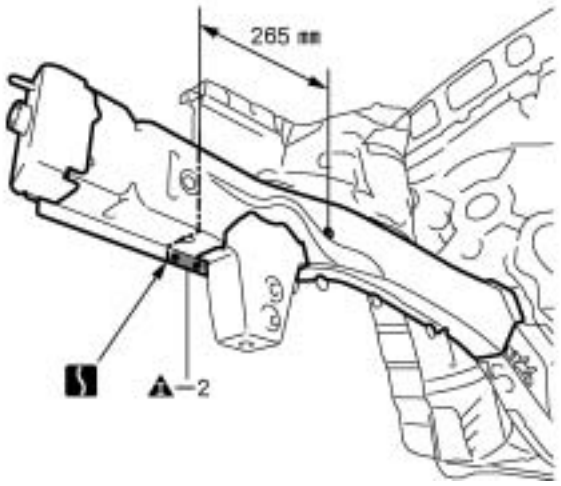

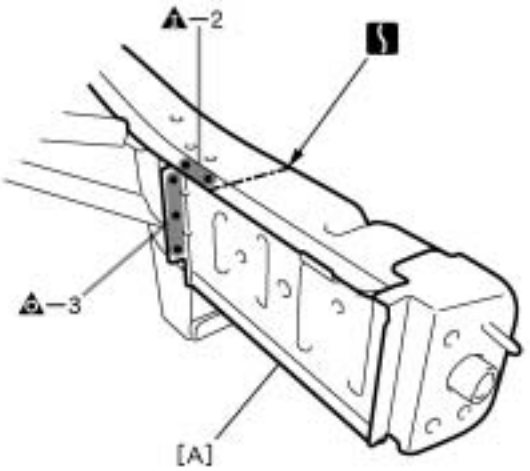

F16703


PART NAME
[A] Front Side Member Extension


265 mm (10.43 in.)

INSTALLATION


- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam to the corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.


(LH)

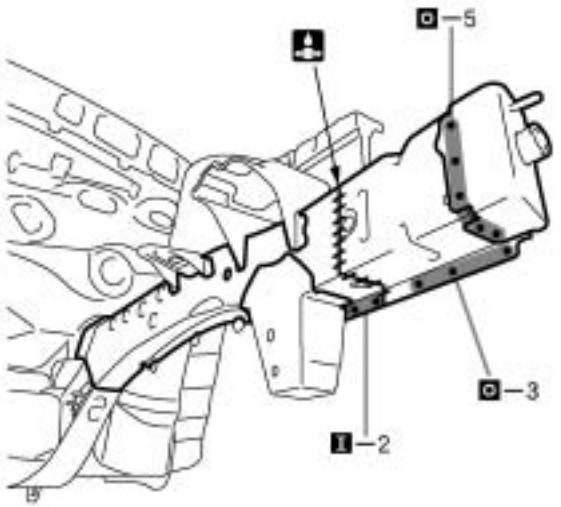

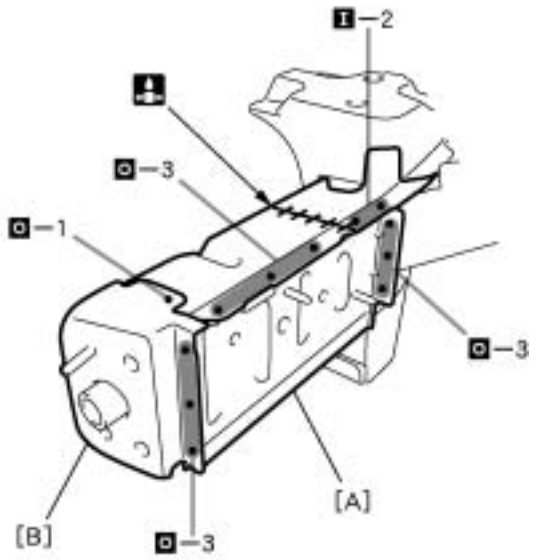

(RH)

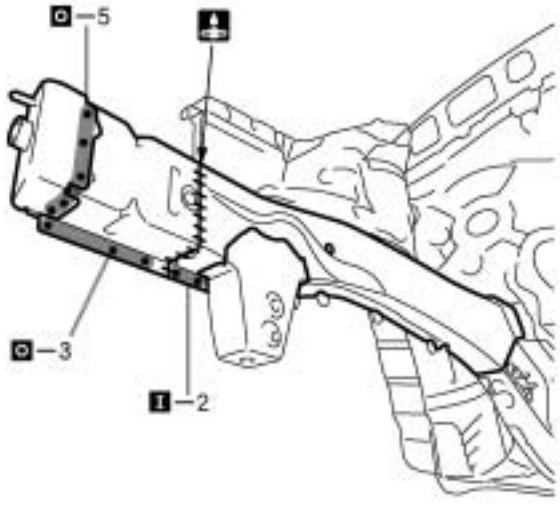

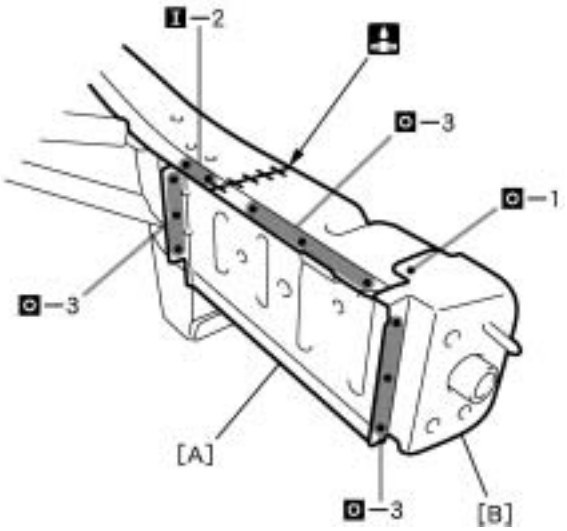

F16704

PART NAME

[A] Front Side Member Extension [B] Body Mounting No.1 Bracket