
BODY DIMENSION DRAWINGS
ENGINE COMPARTMENT

(Three-Dimensional Distance)

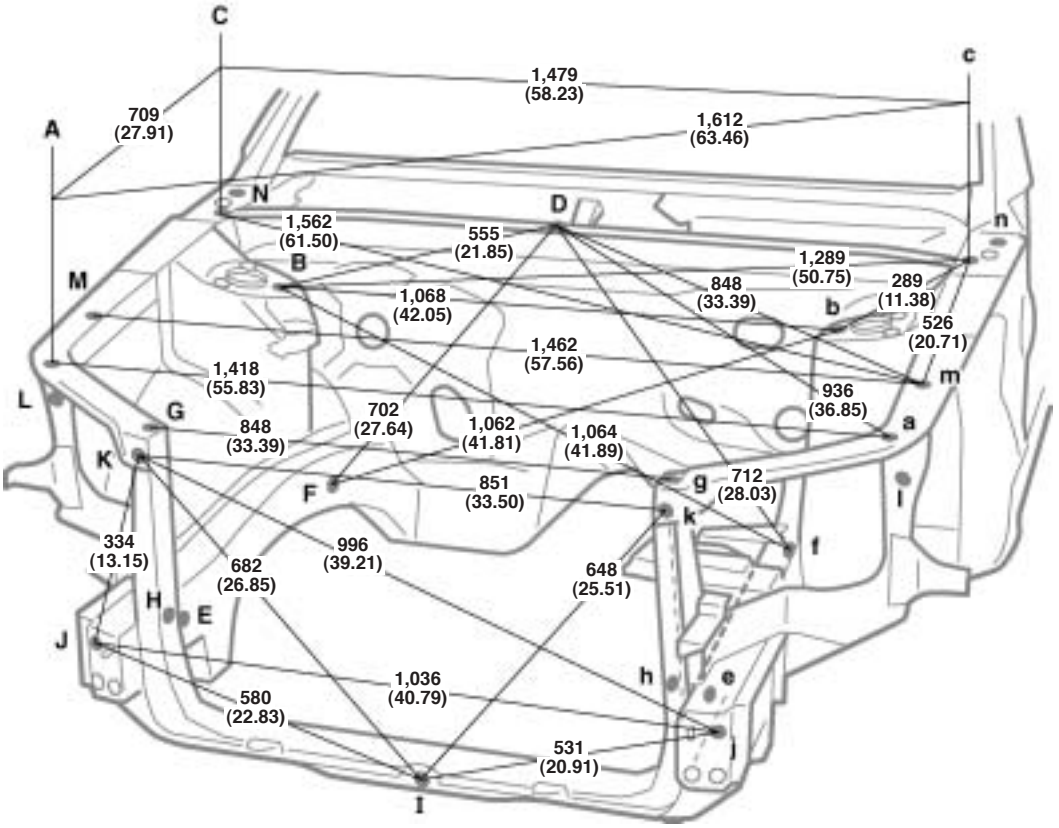

Vehicle Dimensions

C-N or c–n	D-E	D-e	H-h	L-l
106 (4.17)	988 (38.90)	985 (38.78)	860 (33.86)	1,461 (57.52)

Height from Imaginary Standard Line

A, a	G, g	N, n
756 (29.76)	724 (28.50)	858 (33.78)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front fender installation nut-front	6 (0.24) nut	H, h	Front crossmember side gusset standard hole	15 (0.59)
B, b	Front spring support hole-inner	11 (0.43)	I	Hood lock support installation nut	6 (0.24) nut
C, c	Front fender installation nut-rear	6 (0.24) nut	J, j	Front bumper reinforcement installation nut	10 (0.39) nut
D	Cowl top inner panel standard hole	8 (0.31)	K, k	Radiator upper support installation nut	6 (0.24) nut
E, e	Front side member standard hole	18 (0.71)	L, l	Radiator support standard hole	10 (0.39)
F, f	Front side member standard hole	RH : 18 (0.71) LH : 13 (0.51)	M, m	Front Fender apron to cowl side member standard hole	10 (0.39)
			N, n	Hood hinge installation nut-rear	8 (0.31) nut
G, g	Radiator upper support installation nut	6 (0.24) nut	—	—	—

BODY OPENING AREAS (Side View: Front)

(Three-Dimensional Distance)

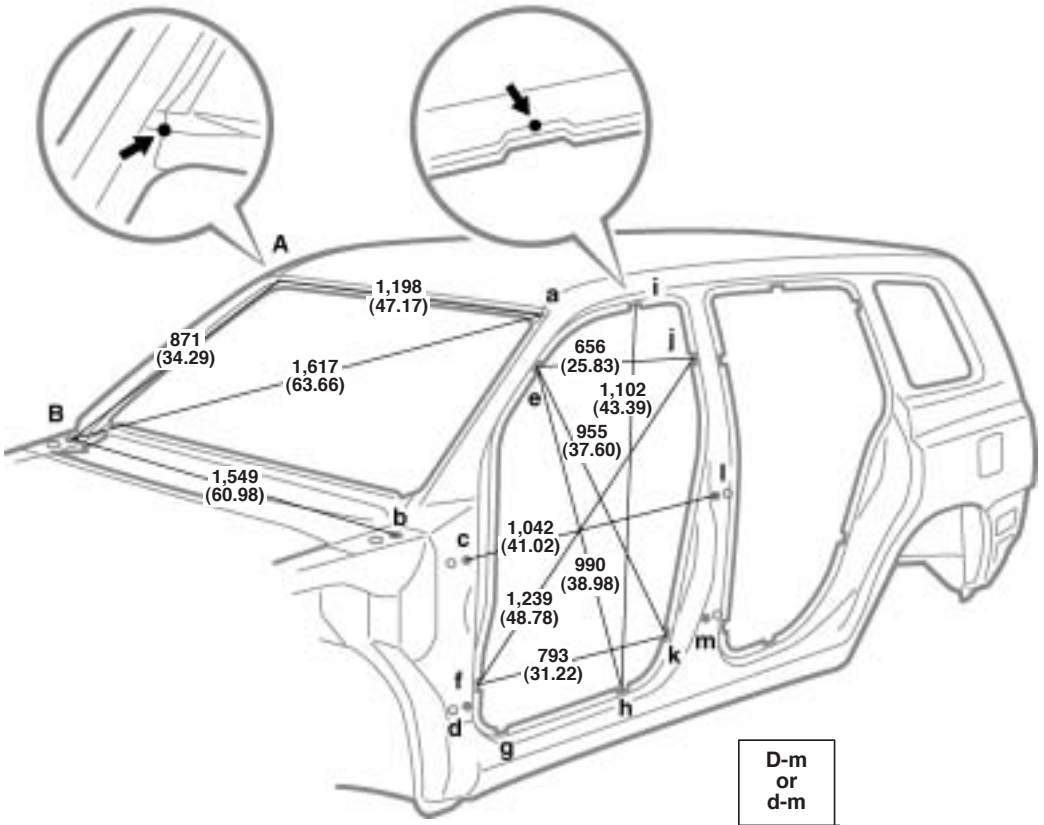

D-m or d-m
1,011 (39.80)

Vehicle Dimensions Left ↔ Right

E-e	F-f	G-g	H-h	I-i	J-j	K-k
1,339 (52.72)	1,502 (59.13)	1,502 (59.13)	1,502 (59.13)	1,210 (47.64)	1,369 (53.90)	1,502 (59.13)

E-f or e-F	E-h or e-H	E-j or e-J	F-j or f-J	F-k or f-K	H-i or h-I	J-k or j-K
1,651 (65.00)	1,729 (68.07)	1,504 (59.21)	1,895 (74.61)	1,698 (66.85)	1,741 (68.54)	1,657 (65.24)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel / Front body pillar adjoining portion	—	H, h	Rocker panel assembly mark	—
B, b	Hood hinge installation nut-rear	8 (0.31) nut	I, i	Roof side rail assembly mark	—
C, c	Front door hinge installation nut	8 (0.31) nut	J, j	Center body pillar assembly mark	—
D, d	Front door hinge installation nut	8 (0.31) nut	K, k	Center body pillar assembly mark	—
E, e	Front body pillar assembly mark	—	L, l	Rear door hinge installation hole	13 (0.51)
F, f	Front body pillar assembly mark	—	M, m	Rear door hinge installation nut	8 (0.31) nut
G, g	Rocker panel assembly mark	—	—	—	—

BODY OPENING AREAS (Side View: Rear)

(Three-Dimensional Distance)

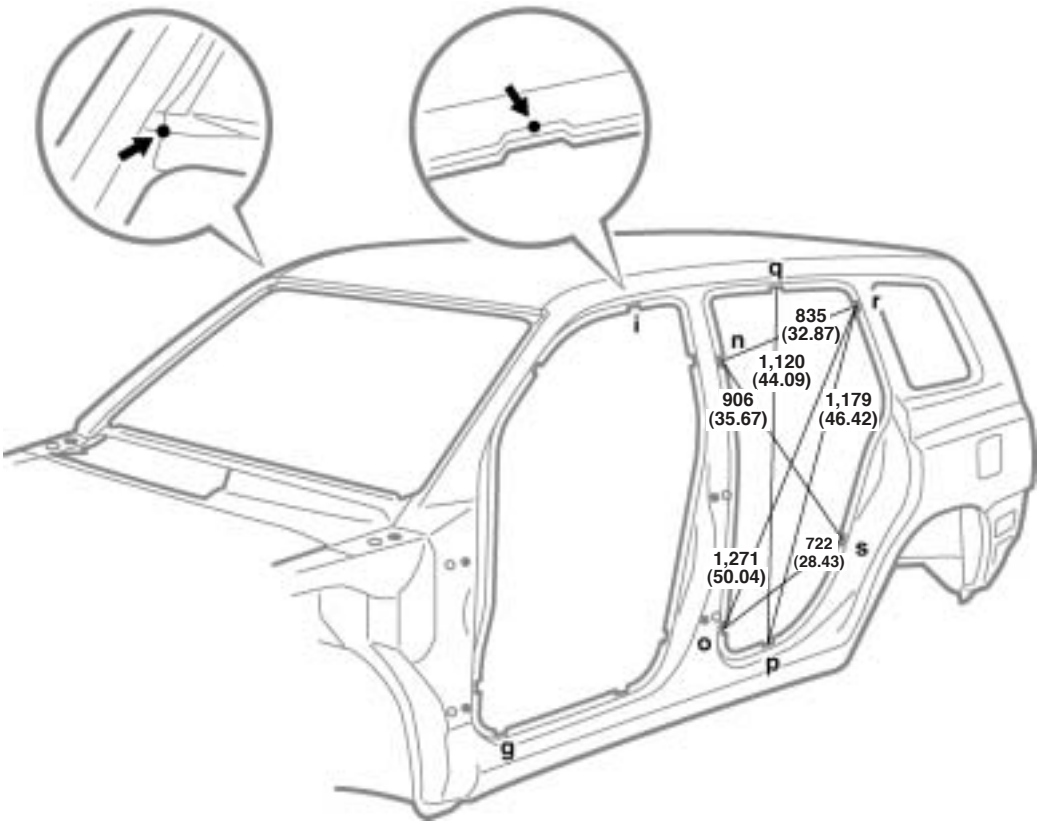

Vehicle Dimensions Left ↔ Right

N-n	O-o	P-p	Q-q	R-s	S-s
1,395 (54.92)	1,502 (59.13)	1,502 (59.13)	1,197 (47.13)	1,254 (49.37)	1,499 (59.02)

G-p or g-P	I-q or i-Q	N-p or n-P	N-r or n-R	N-s or n-S	O-s or o-S	P-q or p-Q	R-s or r-S
1,928 (75.91)	1,389 (54.69)	1,729 (68.07)	1,564 (61.57)	1,706 (67.17)	1,665 (65.55)	1,747 (68.78)	1,580 (62.20)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
G, g	Rocker panel assembly mark	—	P, p	Rocker panel assembly mark	—
I, i	Roof side rail assembly mark	—	Q, q	Roof side rail assembly mark	—
N, n	Center body pillar assembly mark	—	R, r	Quarter panel assembly mark	—
O, o	Center body pillar assembly mark	—	S, s	Quartet panel assembly mark	—

BODY OPENING AREAS (Rear View)

(Three-Dimensional Distance)

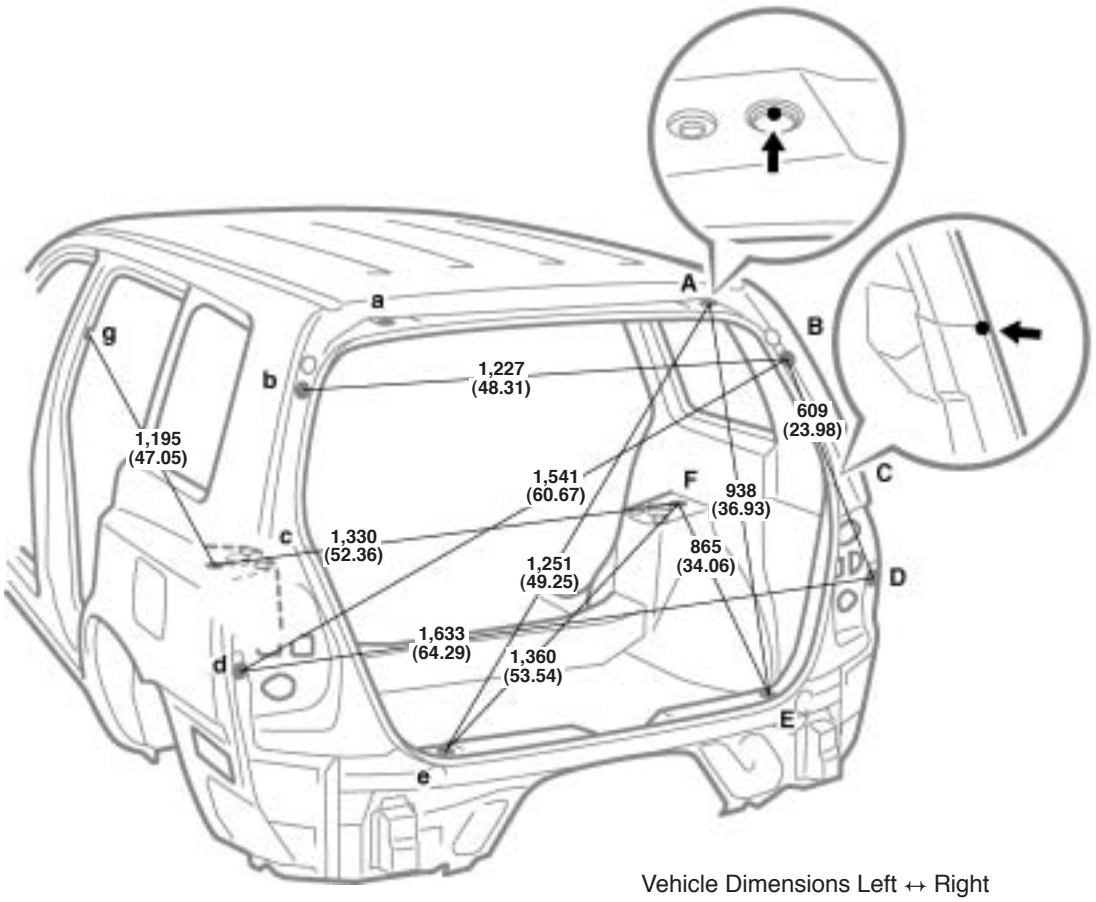

Vehicle Dimensions Left ↔ Right

C-c	F-g or f-G
1,325 (52.17)	1,812 (71.34)

mm (in.)


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Back door hinge installation hole-outer	15 (0.59)	D, d	Quarter panel standard hole	10 (0.39)
B, b	Back door damper stay installation nut	6 (0.24) nut	E, e	Deck trim side panel installation hole	7 (0.28)
C, c	Roof side inner front panel / Roof side inner panel adjoining portion	—	F, f	Rear spring support hole outer	12.5 (0.492)
			G, g	Center body pillar assembly mark	—

UNDER BODY
2WD

(Three-Dimensional Distance)


Vehicle Dimensions

F-H or f-h	G-i or g-I	I-K or i-k
294 (11.57)	1,251 (49.25)	999 (39.33)

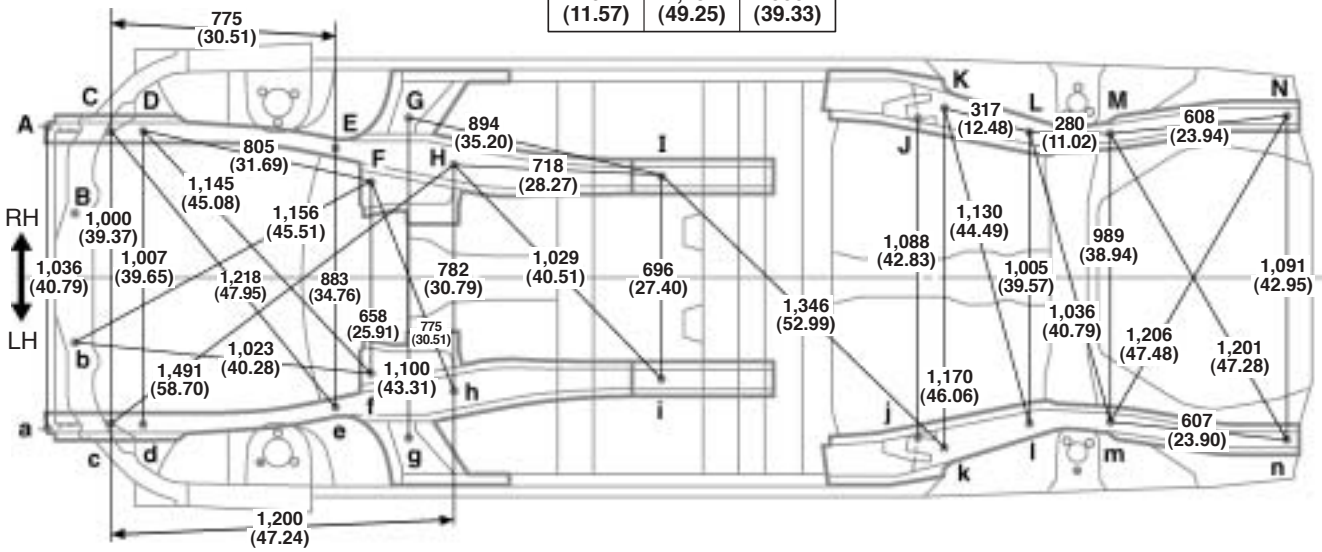

Front

1	2	3
92 (3.62)	100 (3.94)	99 (3.90)

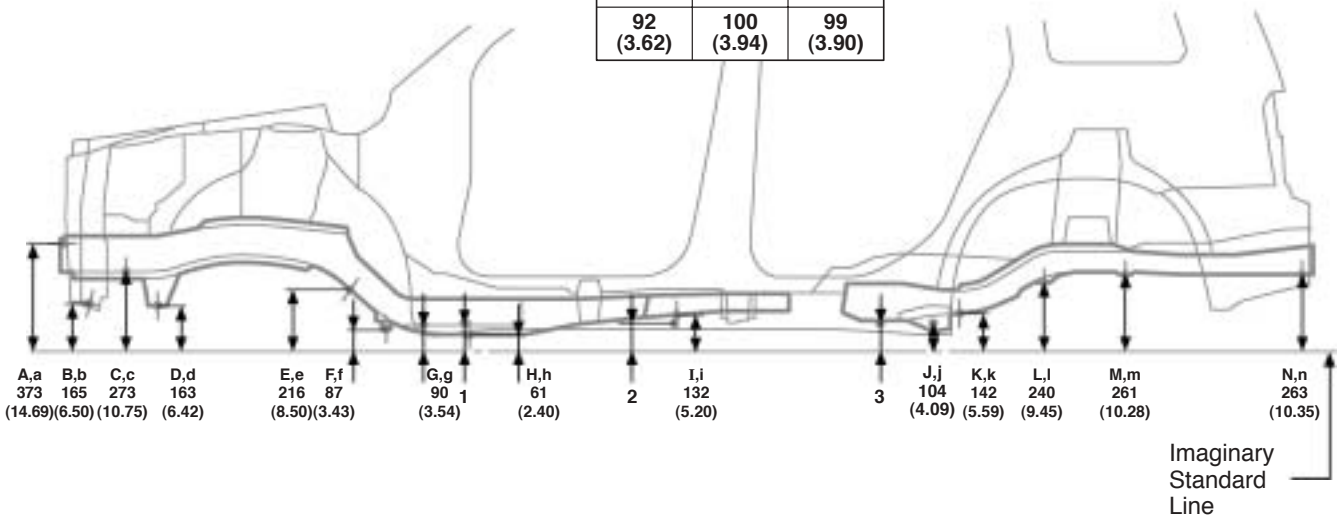

mm (in.)


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front bumper reinforcement installation nut	10 (0.39) nut	H, h	Front side member standard hole	25 (0.98)
B, b	Front crossmember lower standard hole	15 (0.59)	I, i	Front floor under reinforcement standard hole	18 (0.71)
C, c	Front side member standard hole	18 (0.71)	J, j	Rear strut bar installation hole inner	12 (0.47)
D, d	Front frame installation nut	16 (0.63) nut	K, k	Rear floor side member standard hole	18 (0.71)
E, e	Front side member standard hole	10 (0.39)	L, l	Rear suspension member installation nut	12 (0.47) nut
F, f	Front frame installation nut	16 (0.63) nut	M, m	Rear suspension member installation nut	12 (0.47) nut
G, g	Torque box front standard hole	25 (0.98)	N, n	Transport hook installation nut	10 (0.39) nut

UNDER BODY
4WD

(Three-Dimensional Distance)


Vehicle Dimensions

F-H or f-h	G-i or g-I	I-K or i-k
294 (11.57)	1,251 (49.25)	999 (39.33)

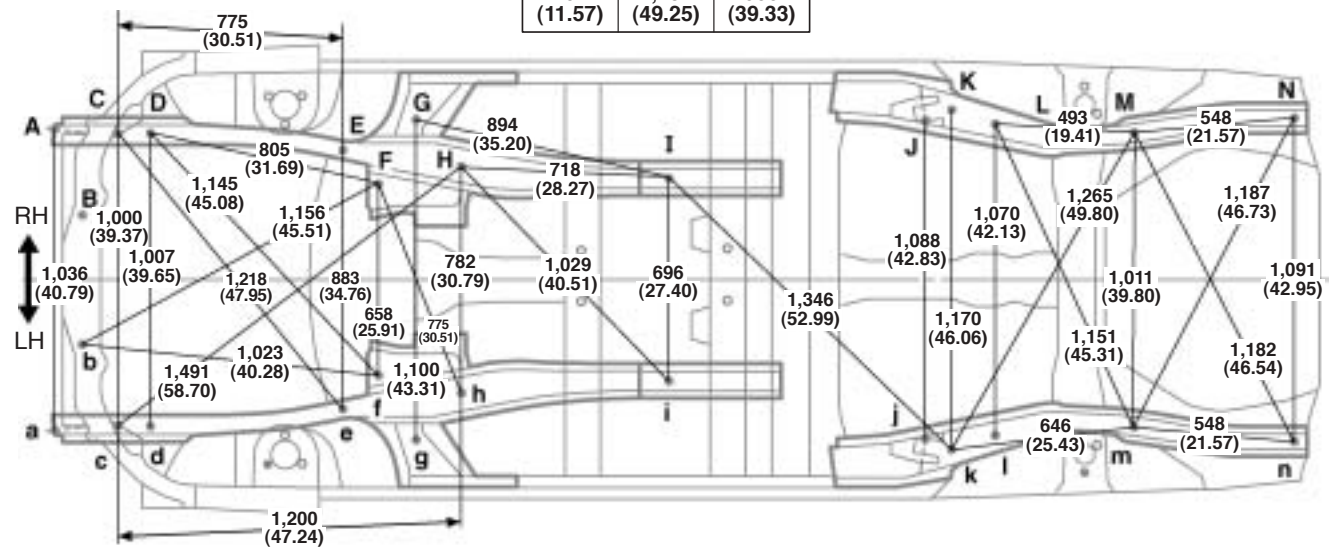

Front

1	2	3
92 (3.62)	100 (3.94)	99 (3.90)

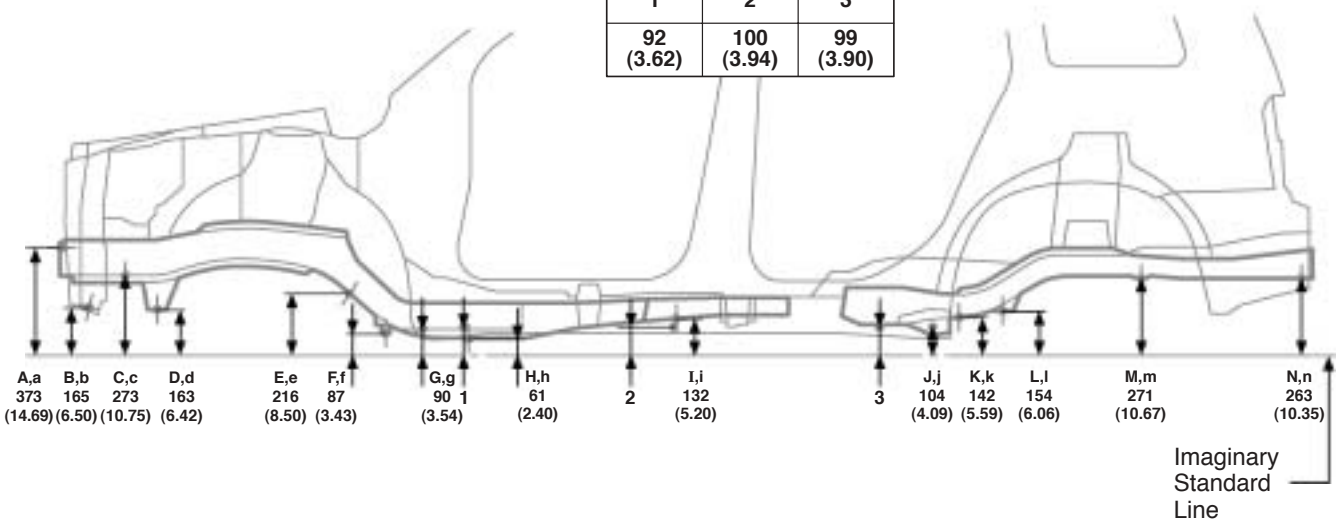



mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front bumper reinforcement installation nut	10 (0.39) nut	H, h	Front side member standard hole	25 (0.98)
B, b	Front crossmember lower standard hole	15 (0.59)	I, i	Front floor under reinforcement standard hole	18 (0.71)
C, c	Front side member standard hole	18 (0.71)	J, j	Rear strut bar installation hole inner	12 (0.47)
D, d	Front frame installation nut	16 (0.63) nut	K, k	Rear floor side member standard hole	18 (0.71)
E, e	Front side member standard hole	10 (0.39)	L, l	Rear suspension member installation nut	14 (0.55) nut
F, f	Front frame installation nut	16 (0.63) nut	M, m	Rear suspension member installation nut	10 (0.39) nut
G, g	Torque box front standard hole	25 (0.98)	N, n	Transport hook installation nut	10 (0.39) nut

UNDER BODY
2WD

(Two-Dimensional Distance)

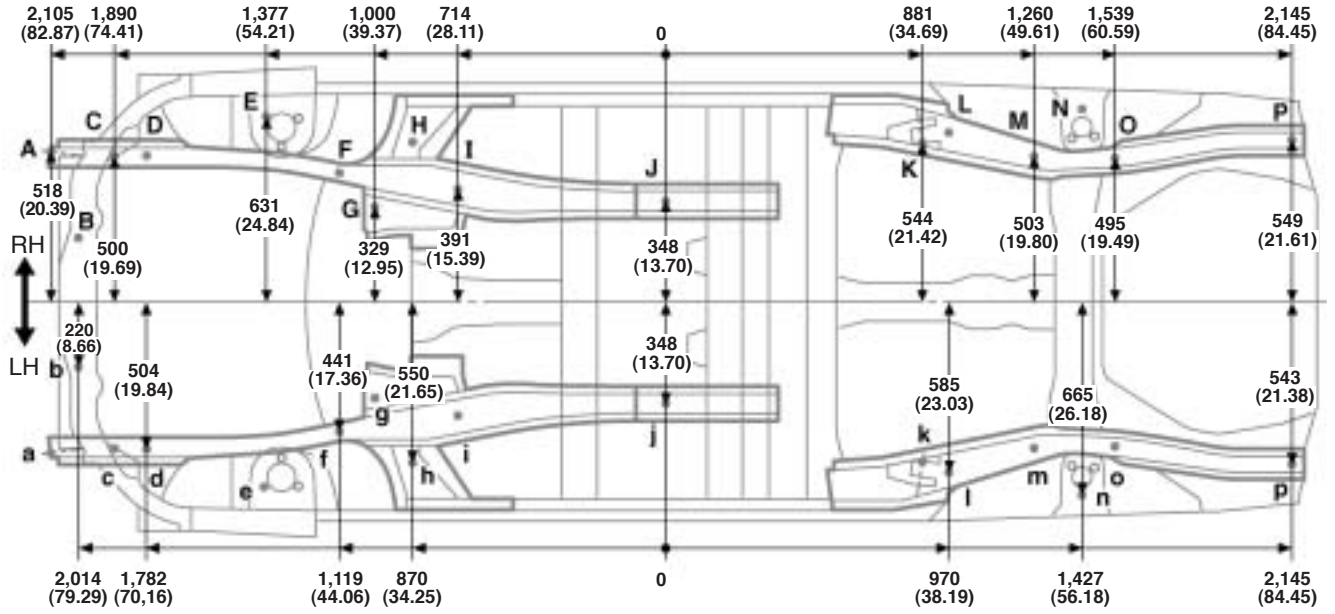

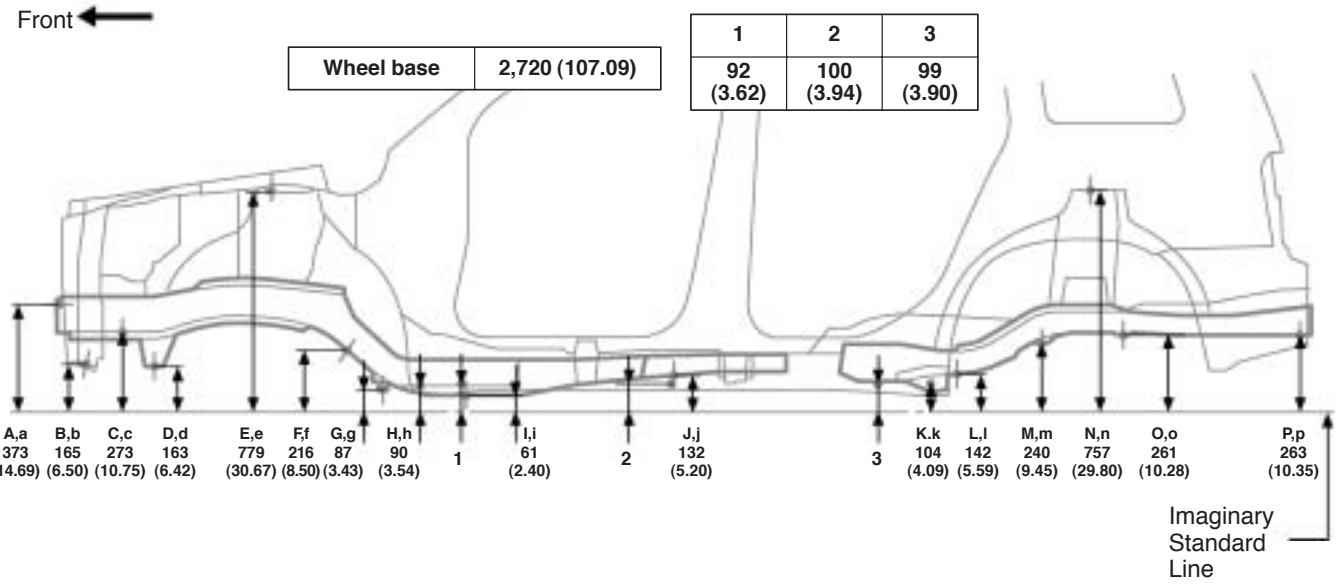



mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front bumper reinforcement installation nut	10 (0.39) nut	I, i	Front side member standard hole	25 (0.98)
B, b	Front crossmember lower standard hole	15 (0.59)	J, j	Front floor under reinforcement standard hole	18 (0.71)
C, c	Front side member standard hole	18 (0.71)	K, k	Rear strut bar installation hole inner	12 (0.47)
D, d	Front frame installation nut	16 (0.63) nut	L, l	Rear floor side member standard hole	18 (0.71)
E, e	Front spring support hole outer-front	11 (0.43)	M, m	Rear suspension member installation nut	12 (0.47) nut
F, f	Front side member standard hole	10 (0.39)	N, n	Rear spring support hole outer	12.5 (0.492)
G, g	Front frame installation nut	16 (0.63) nut	O, o	Rear suspension member installation nut	12 (0.47) nut
H, h	Torque box front standard hole	25 (0.98)	P, p	Transport hook installation nut	10 (0.39) nut

UNDER BODY
4WD

(Two-Dimensional Distance)

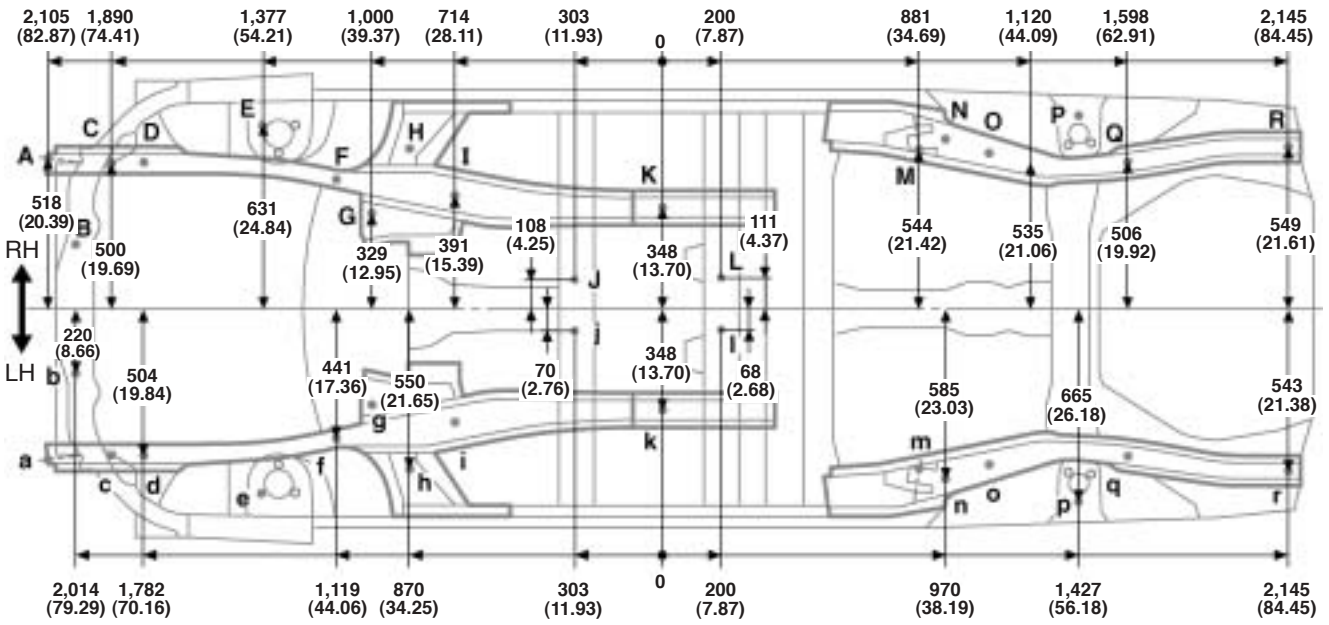


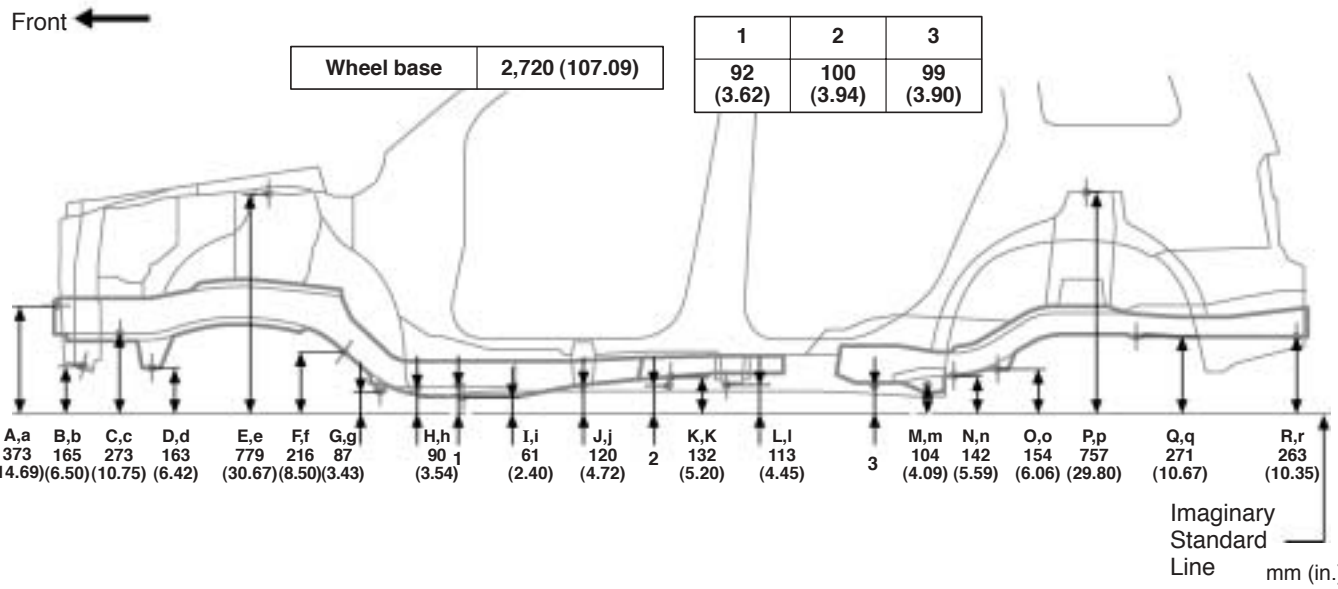

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front bumper reinforcement installation nut	10 (0.39) nut	K, k	Front floor under reinforcement standard hole	18 (0.71)
B, b	Front crossmember lower standard hole	15 (0.59)	L, l	Propeller shaft center support bearing installation nut	10 (0.39) nut
C, c	Front side member standard hole	18 (0.71)			
D, d	Front frame installation nut	16 (0.63) nut	M, m	Rear strut bar installation hole inner	12 (0.47)
E, e	Front spring support hole outer-front	11 (0.43)	N, n	Rear floor side member standard hole	18 (0.71)
F, f	Front side member standard hole	10 (0.39)	O, o	Rear suspension member installation nut	14 (0.55) nut
G, g	Front frame installation nut	16 (0.63) nut	P, p	Rear spring support hole outer	12.5 (0.492)
H, h	Torque box front standard hole	25 (0.98)	Q, q	Rear suspension member installation nut	10 (0.39) nut
I, i	Front side member standard hole	25 (0.98)	R, r	Transport hook installation nut	10 (0.39) nut
J, j	Propeller shaft center support bearing installation nut	10 (0.39) nut	—	—	—

FRONT FRAME

(Three-Dimensional Distance)

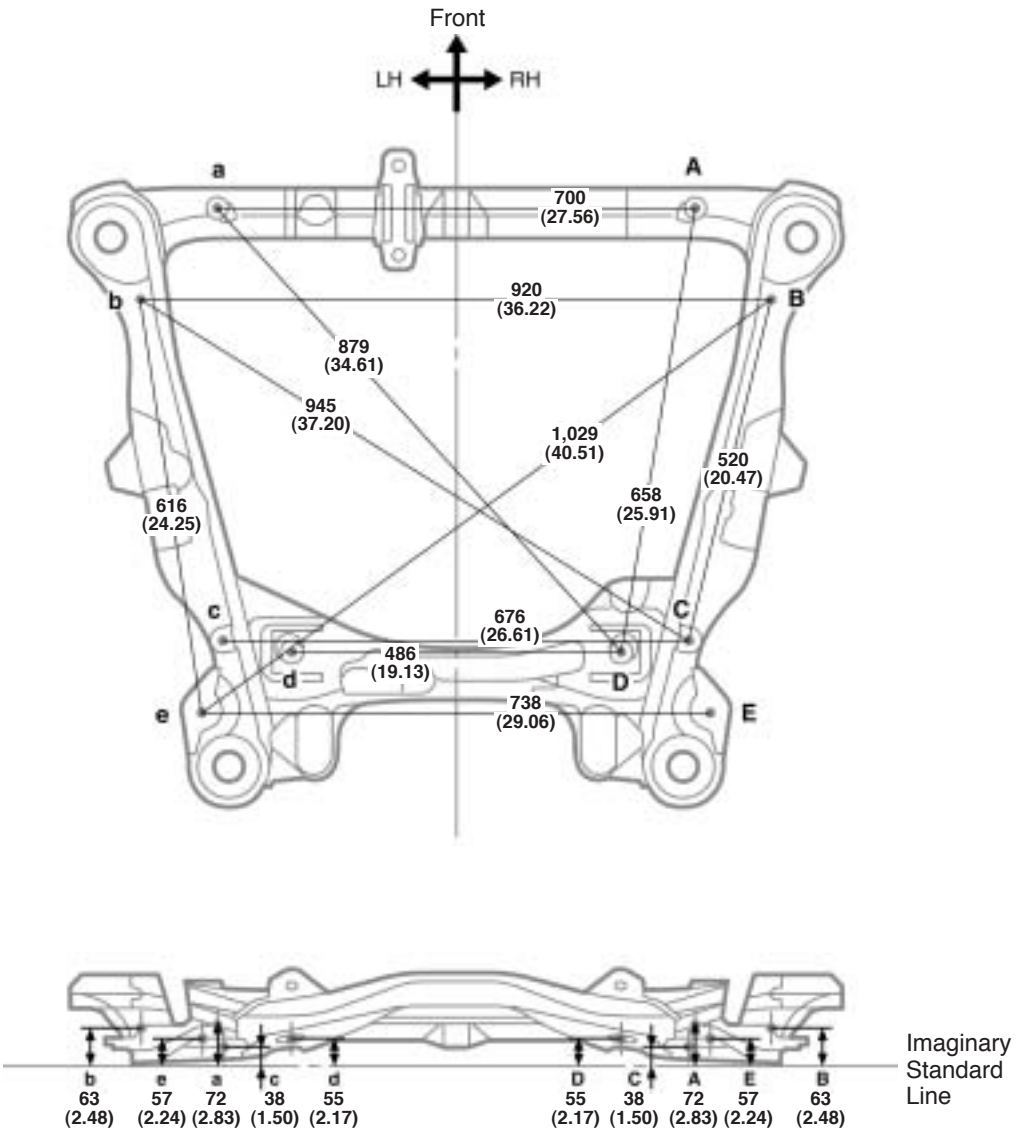


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front frame standard hole	13 (0.51)	D, d	Front frame standard hole	13 (0.51)
B, b	Front frame standard hole	13 (0.51)	E, e	Lower arm installation hole	15 (0.59)
C, c	Front frame standard hole	13 (0.51)	—	—	—

FRONT FRAME

(Two-Dimensional Distance)

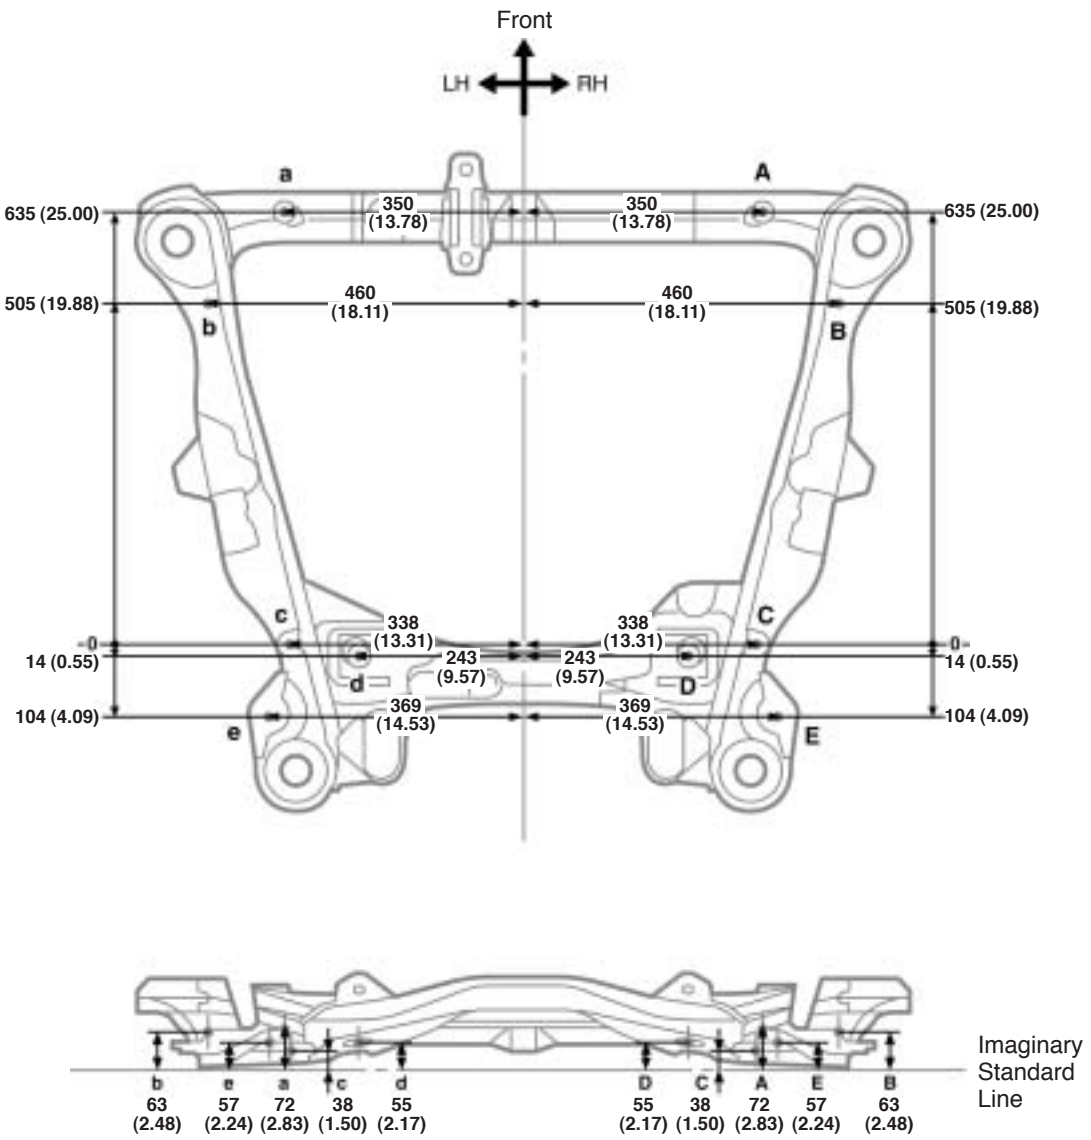

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front frame standard hole	13 (0.51)	D, d	Front frame standard hole	13 (0.51)
B, b	Front frame standard hole	13 (0.51)	E, e	Lower arm installation hole	15 (0.59)
C, c	Front frame standard hole	13 (0.51)	—	—	—