
BODY PANEL SEALING AREAS

HINT:
1) *Prior to applying body sealer, clean the area with a rag soaked in grease, wax and silicone remover.*
2) *If weld-through primer was used, first wipe off any excess and coat with anti-corrosion primer before applying body sealer.*
3) *Wipe off excess body sealer with a rag soaked in a grease, wax and silicone remover.*
4) *If body sealer is damaged by peeling, cracks, etc., be sure to repair as necessary.*


++++++++++	Flat Finishing	————	No Flat Finishing

1. ENGINE COMPARTMENT

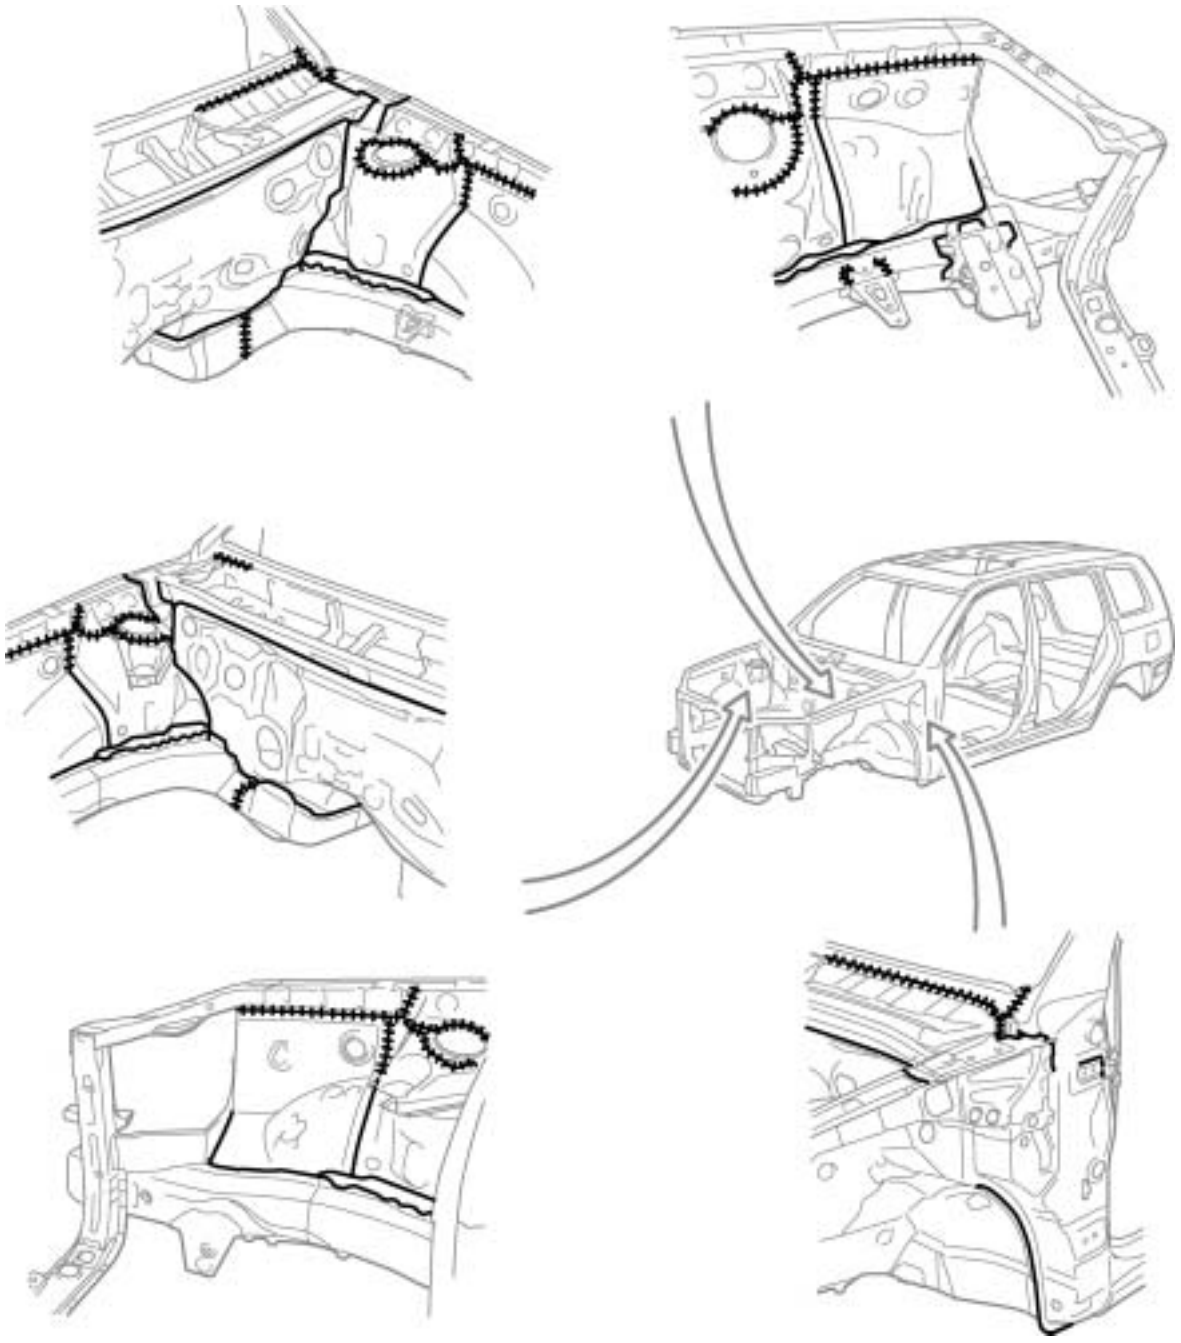


F16731

2. INSIDE

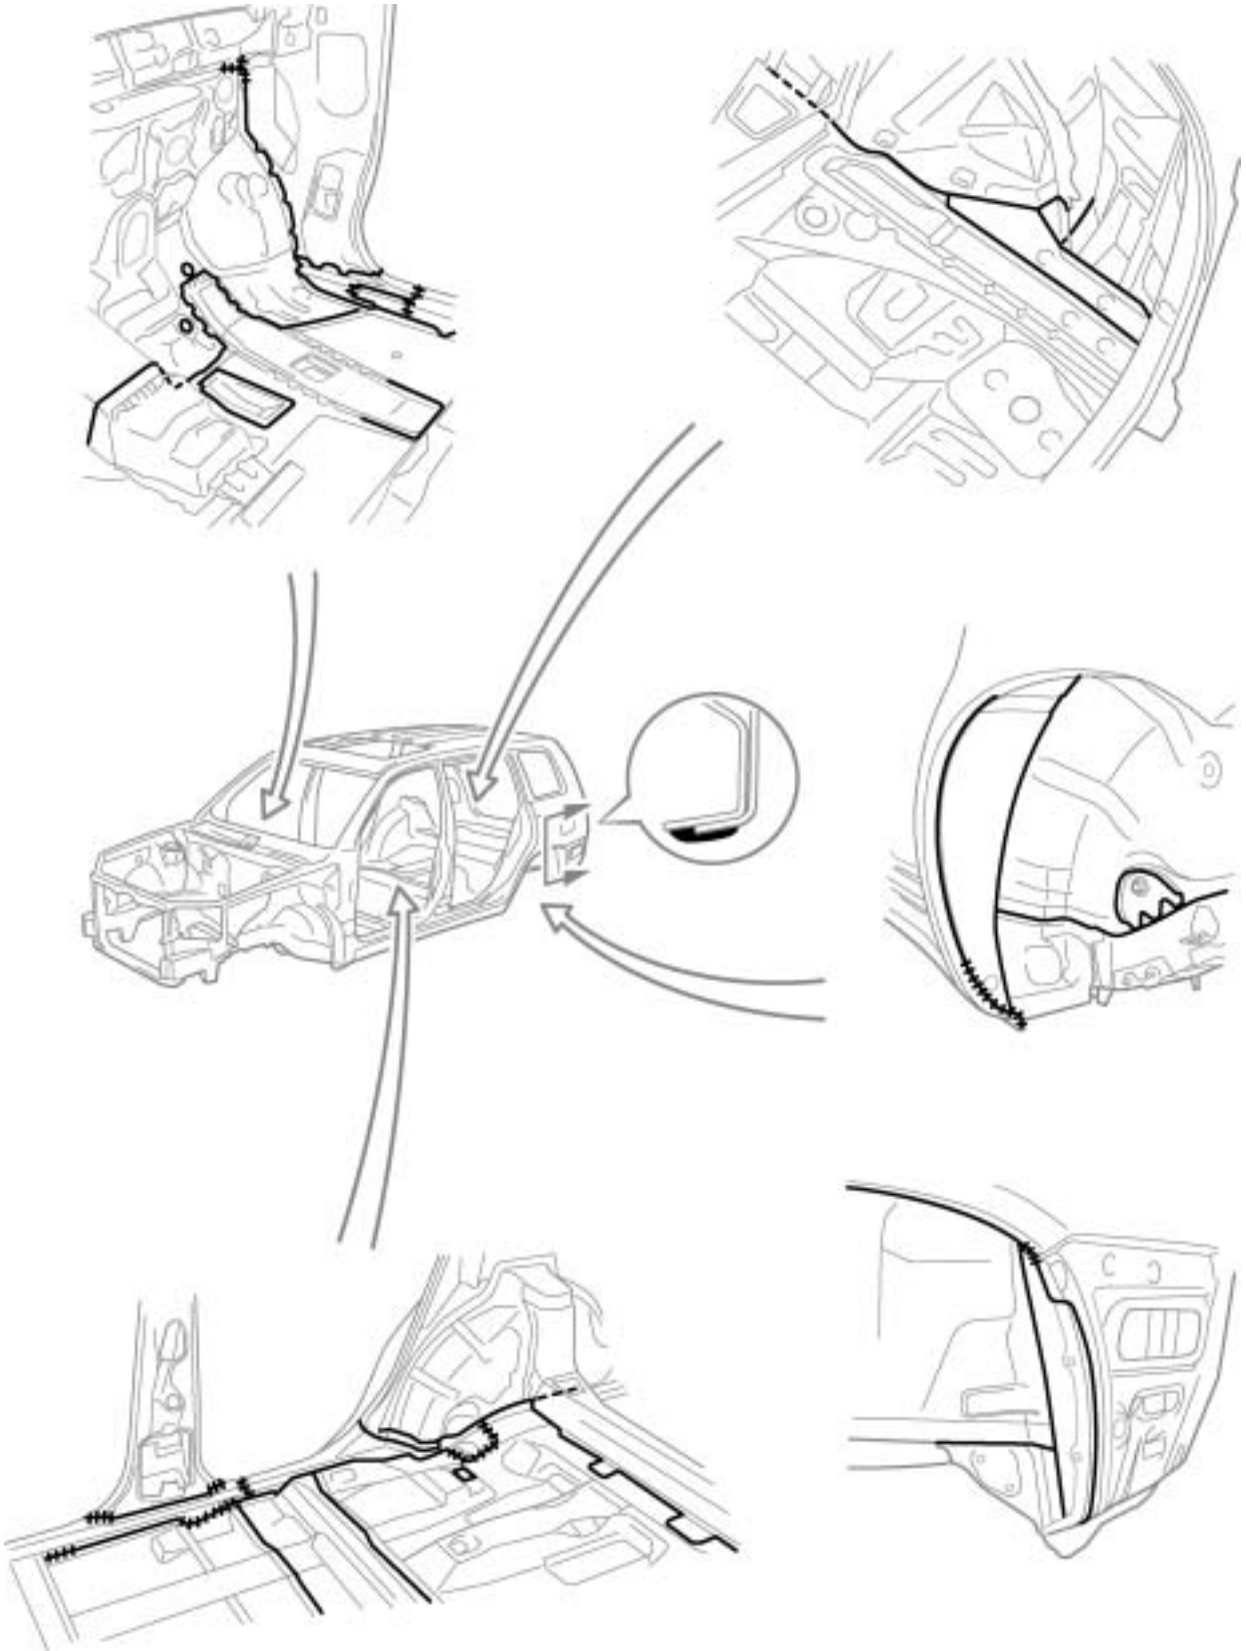


F16732

3. REAR LUGGAGE COMPARTMENT

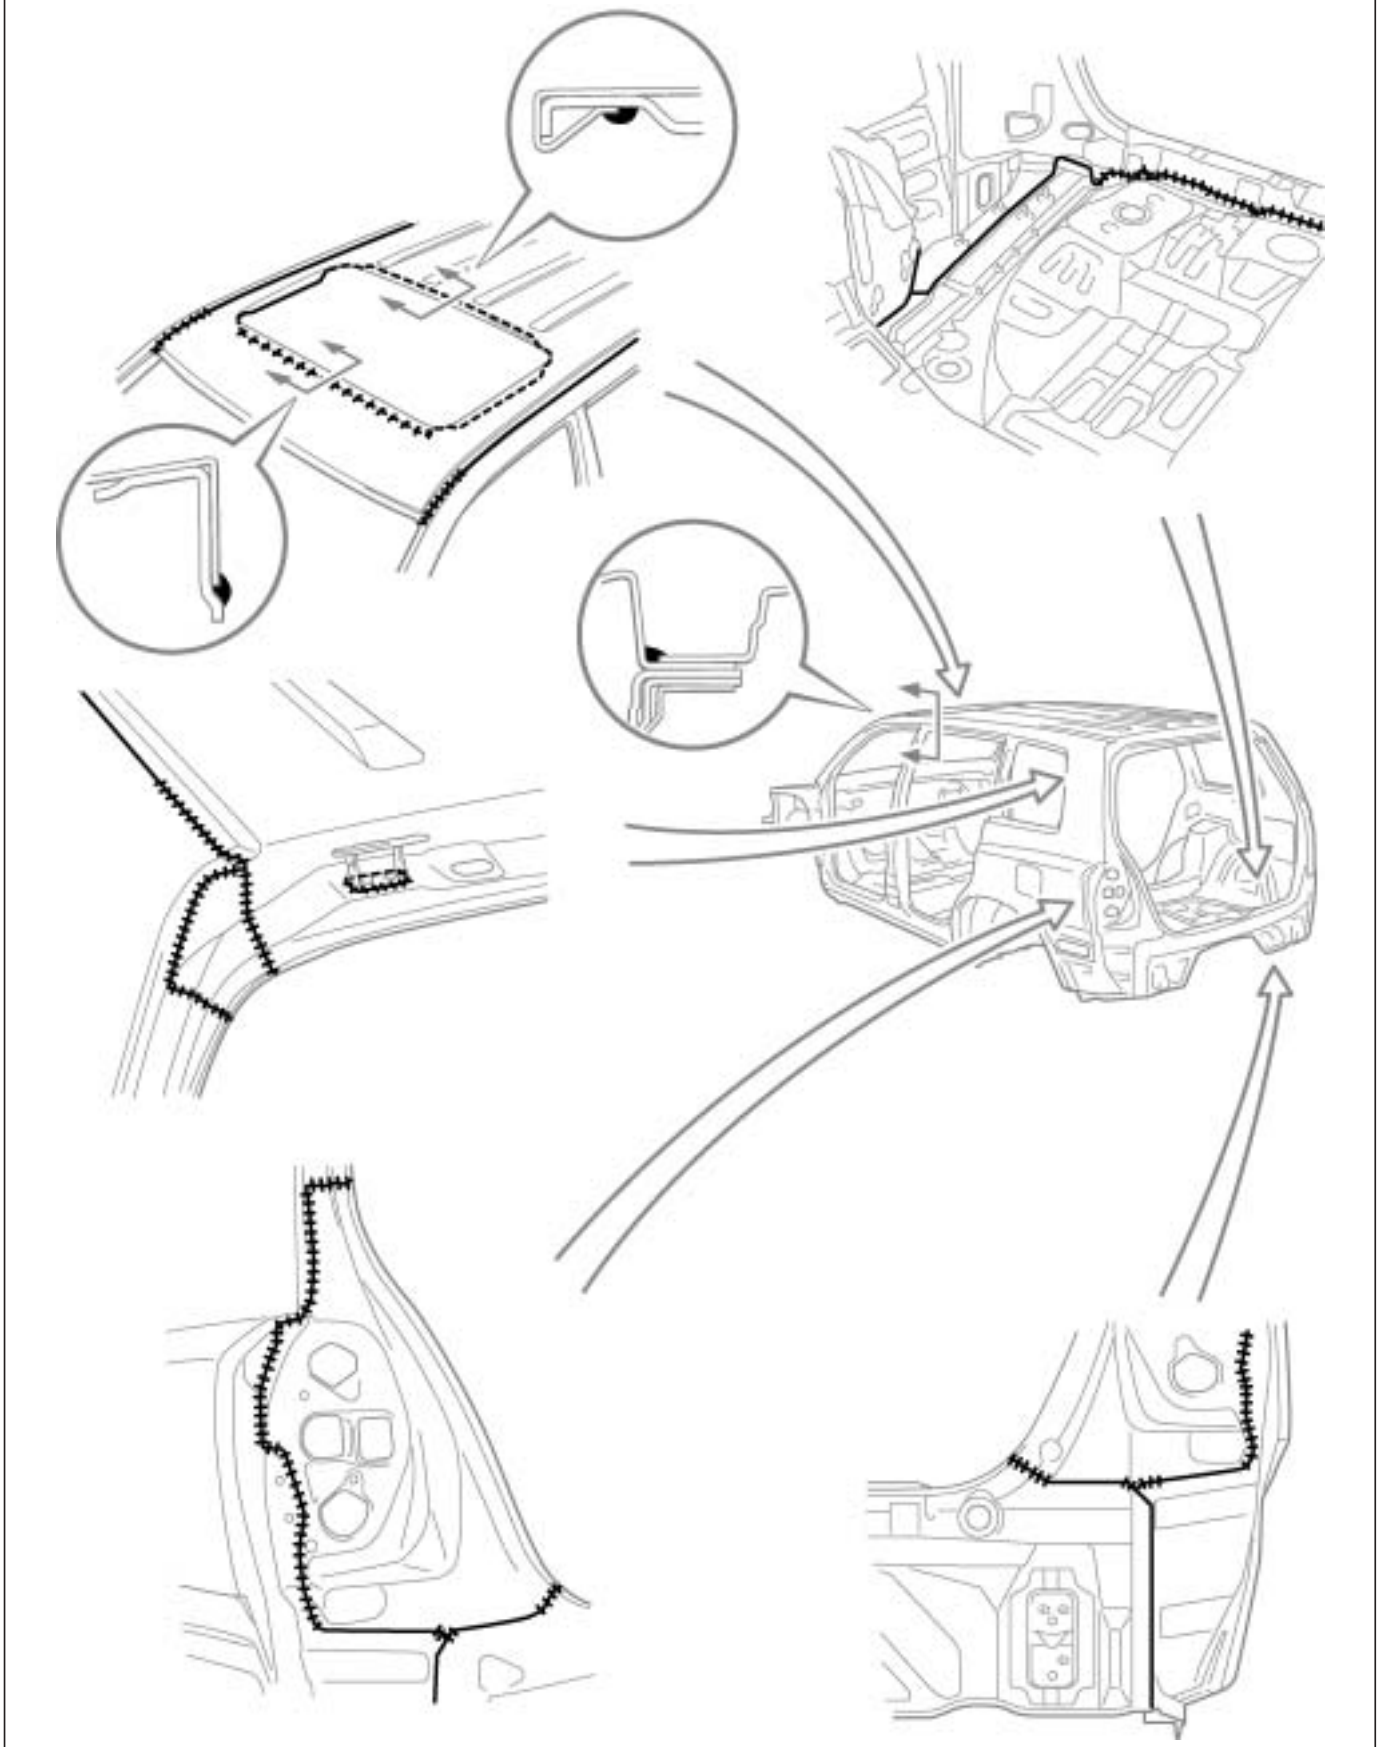


F16733

4. DOOR PARTS

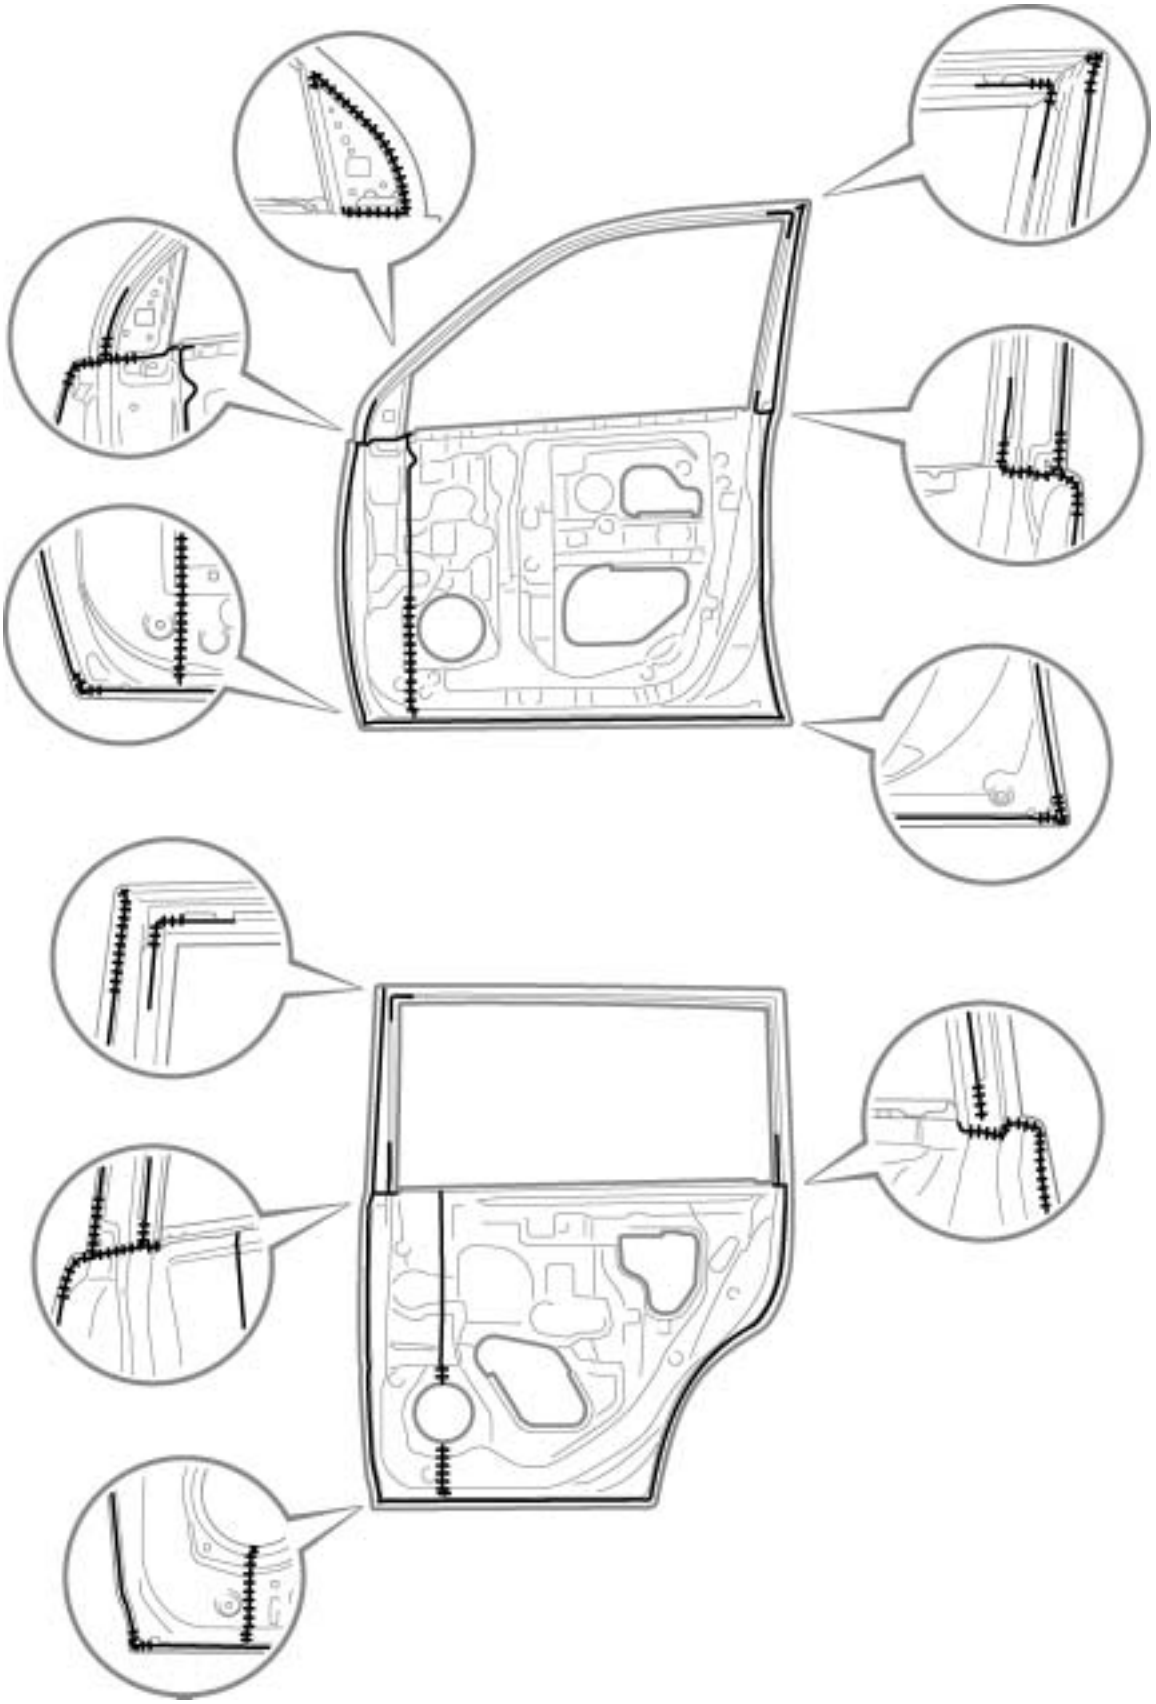

F16734

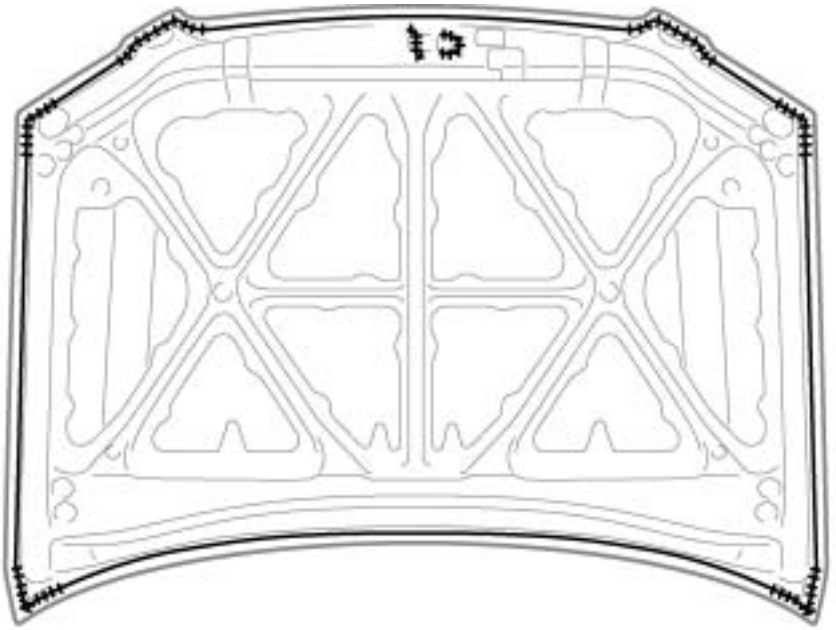



F16735