
■LUBRICATION SYSTEM


1. General

- The lubrication is fully pressurized and all oil passes through an oil filter.
- A trochoid gear type oil pump is directly driven by the crankshaft.

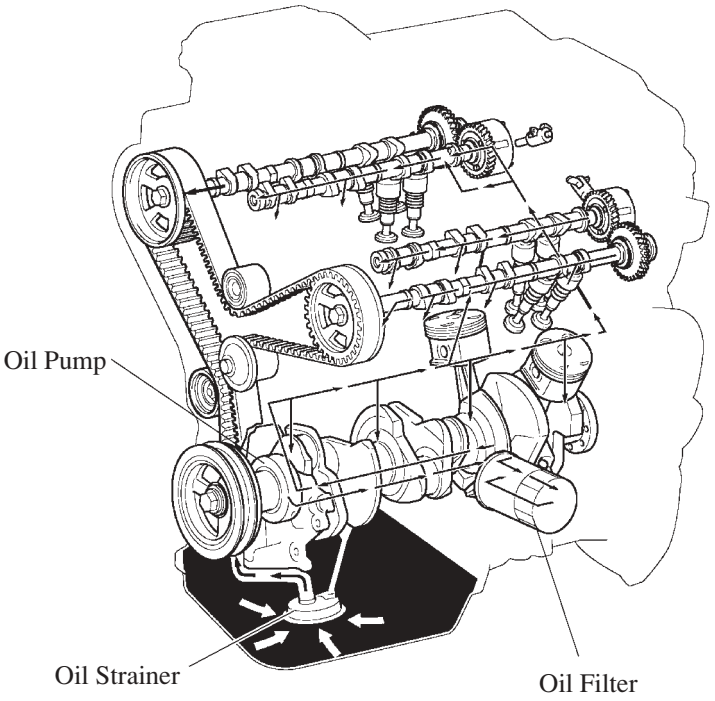


▶ Oil Capacity ◀

	liter (US qts, Imp. qts)
Dry	5.5 (5.8, 4.8)
with Oil Filter	4.7 (5.0, 4.1)
without Oil Filter	4.5 (4.8, 4.0)

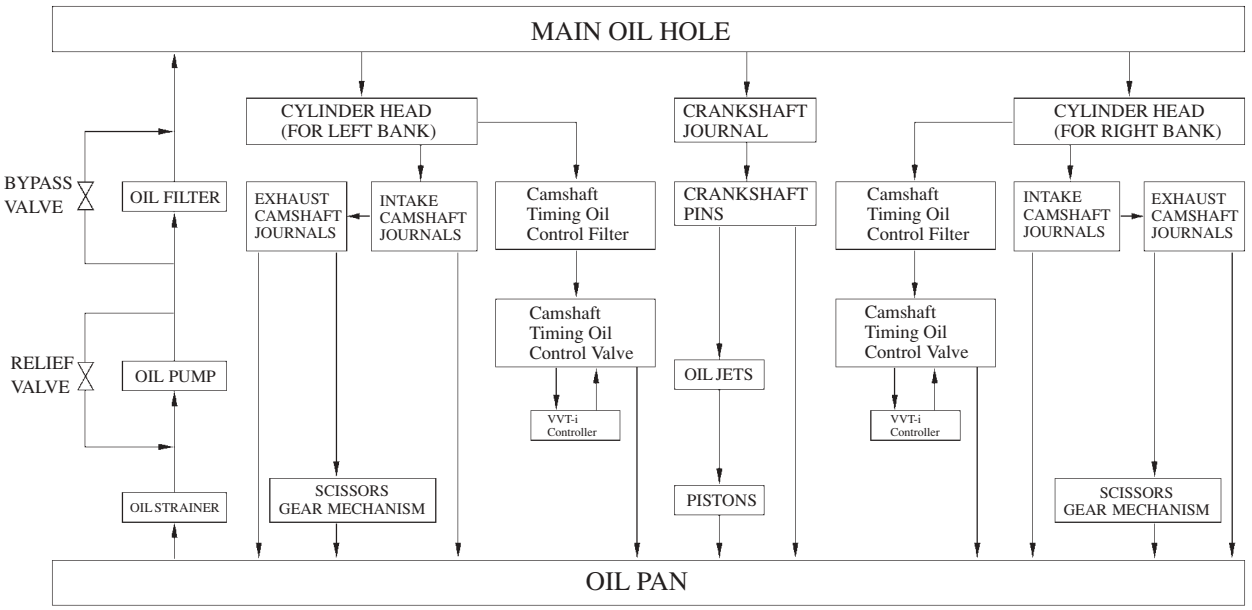

2. Oil Pan

- The oil pan is made up of 2 pices. No.1 oil pan is made of aluminum alloy and No.2 oil pan is made of steel sheet.
- No.1 oil pan is secured to the cylinder block and the transaxle housing and is increasing rigidity.

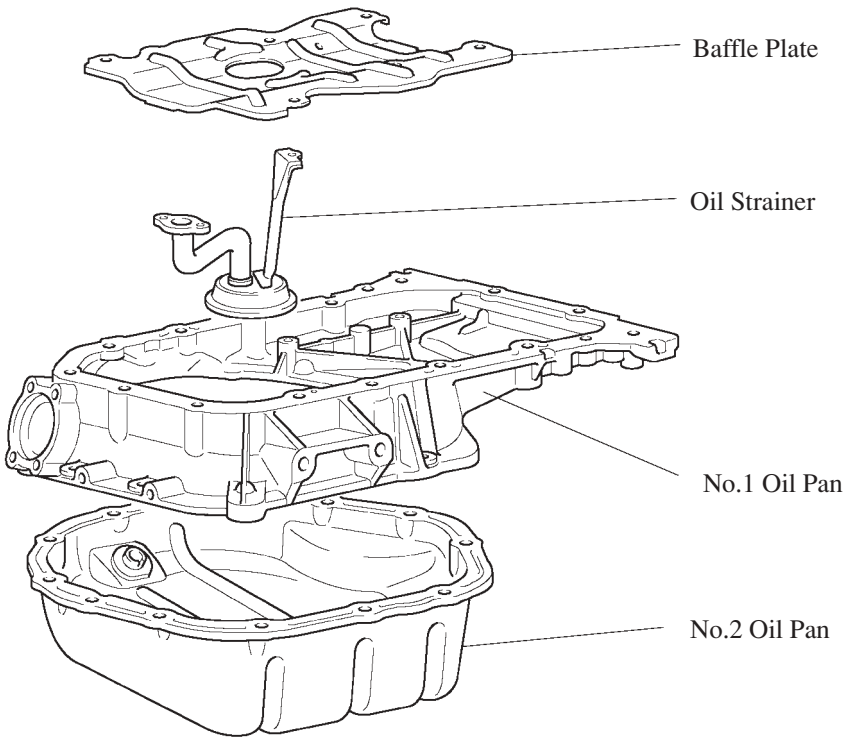

187EG23