

OIL PUMP ASSY (3MZ–FE)

COMPONENTS


170K6–01

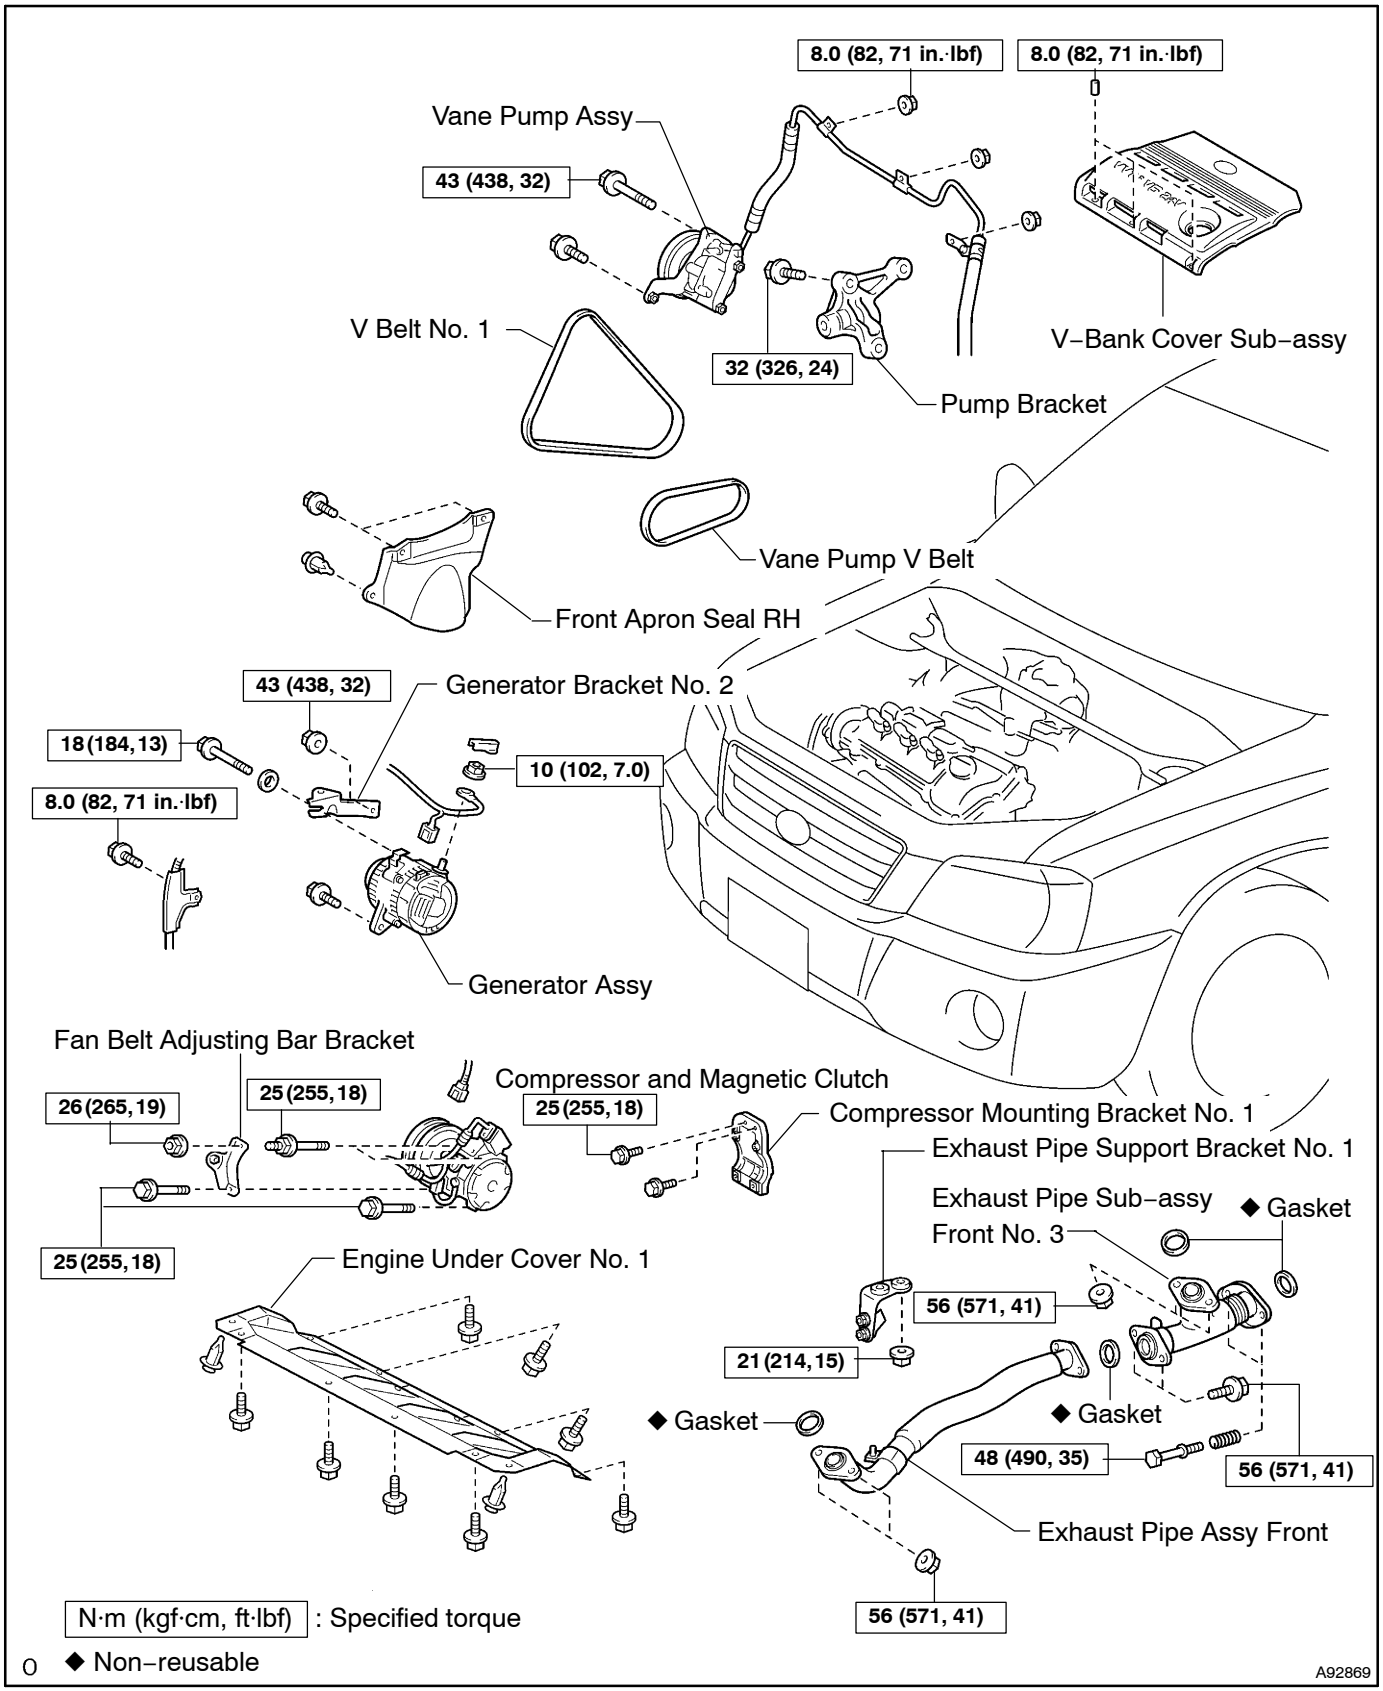


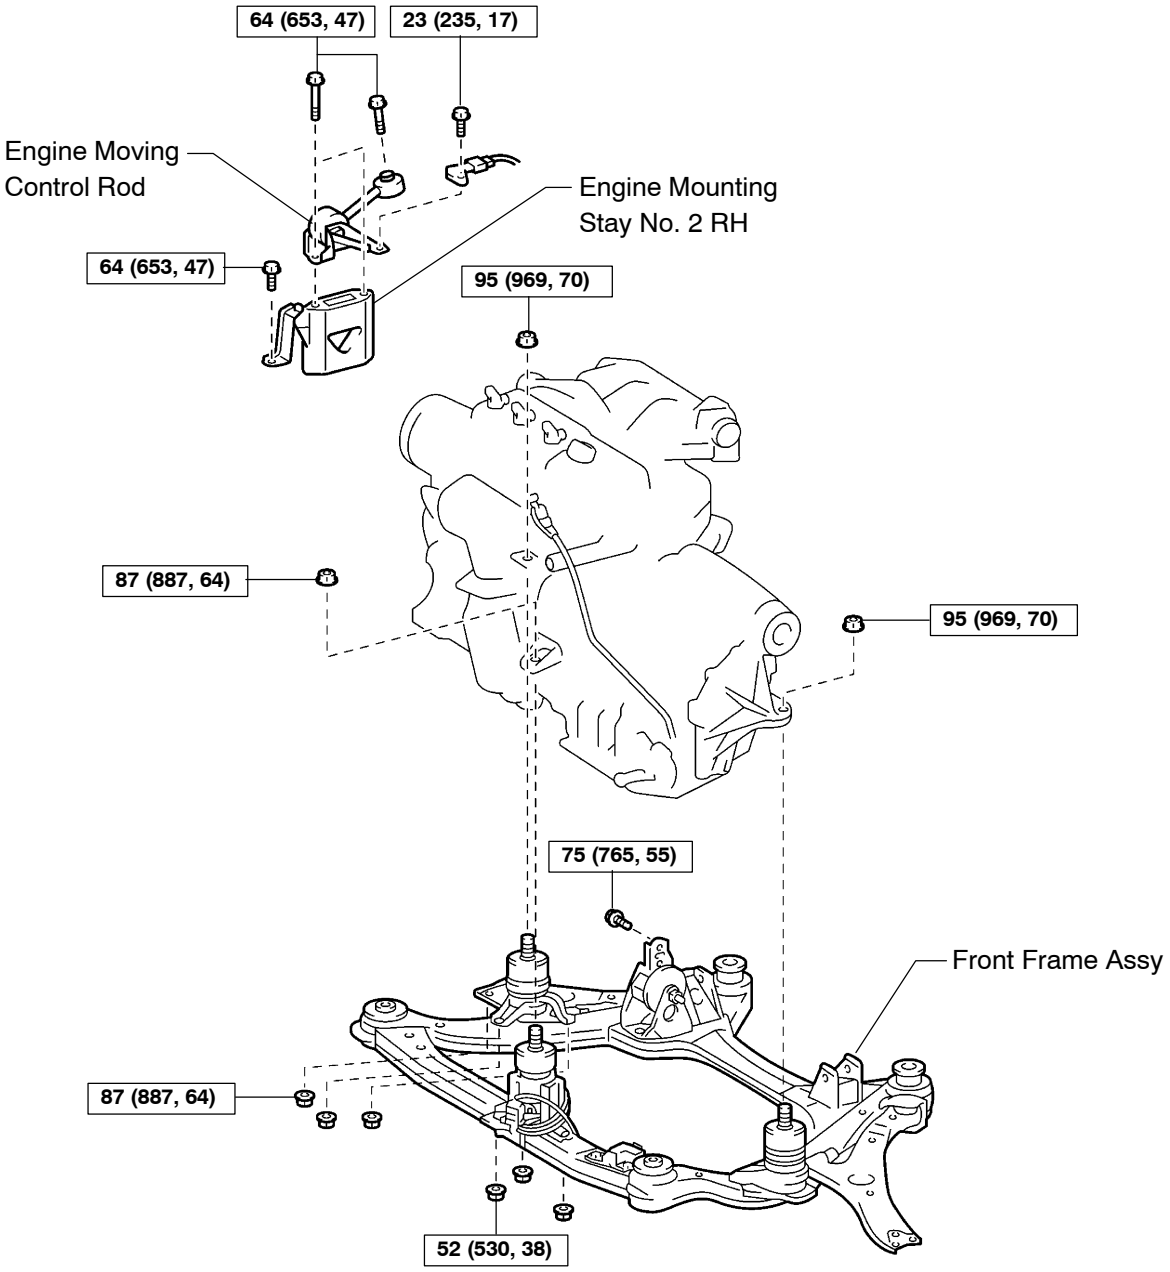

N·m (kgf·cm, ft·lbf) : Specified torque

A90976

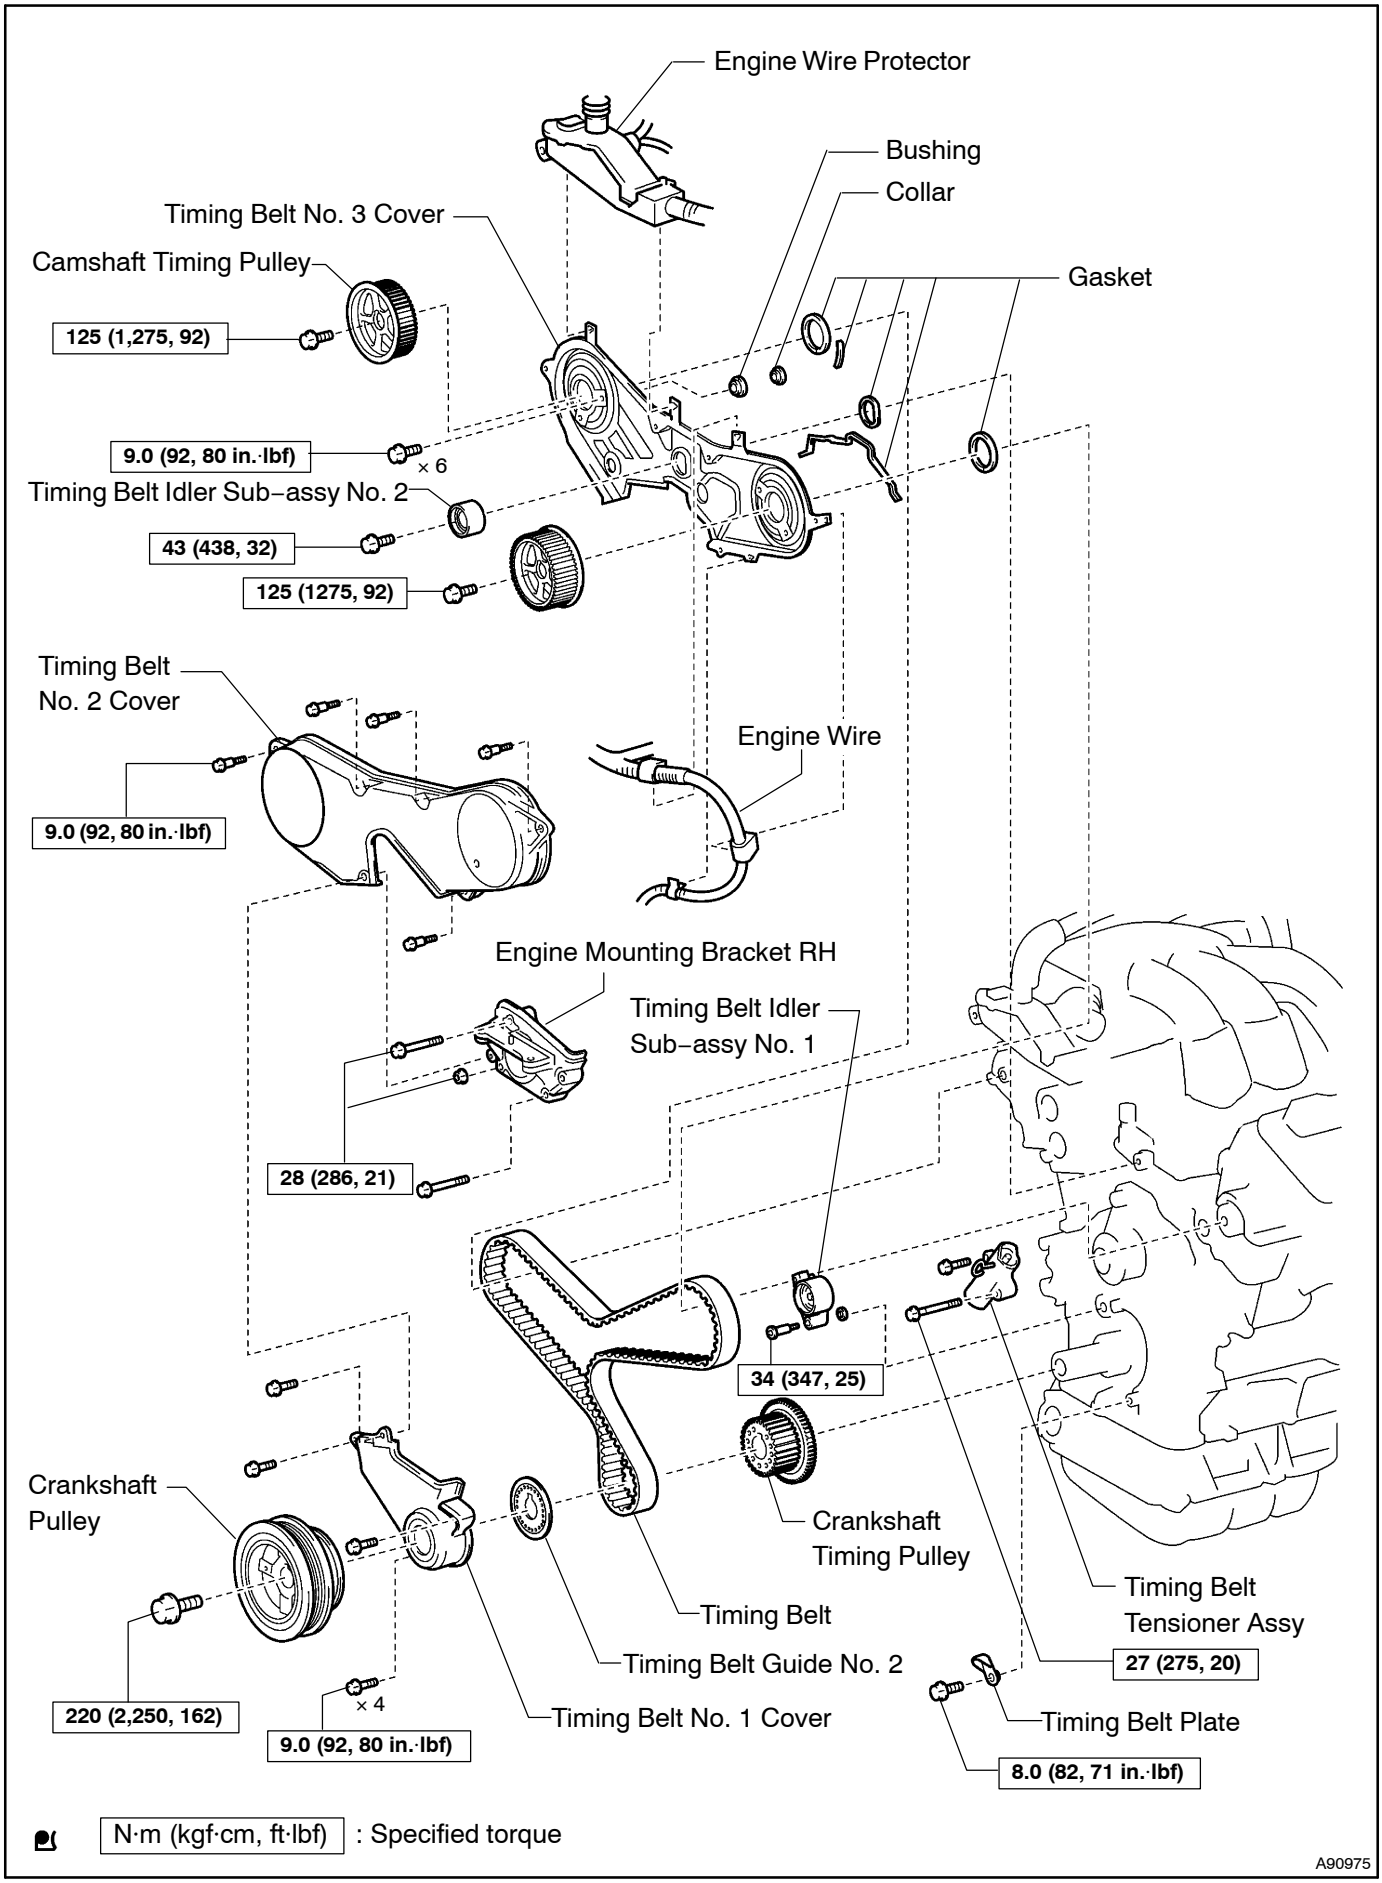
Engine Wire Protector
Bushing
Collar
Timing Belt No. 3 Cover
Camshaft Timing Pulley
Gasket
125 (1,275, 92)
9.0 (92, 80 in.·lbf)
× 6
Timing Belt Idler Sub–assy No. 2
43 (438, 32)
125 (1275, 92)
Timing Belt No. 2 Cover
Engine Wire
9.0 (92, 80 in.·lbf)
Engine Mounting Bracket RH
Timing Belt Idler Sub–assy No. 1
28 (286, 21)
34 (347, 25)
Crankshaft Pulley
Crankshaft Timing Pulley
Timing Belt
Timing Belt Tensioner Assy
Timing Belt Guide No. 2
27 (275, 20)
220 (2,250, 162)
× 4
9.0 (92, 80 in.·lbf)
Timing Belt No. 1 Cover
Timing Belt Plate
8.0 (82, 71 in.·lbf)
N·m (kgf·cm, ft·lbf) : Specified torque
A90975

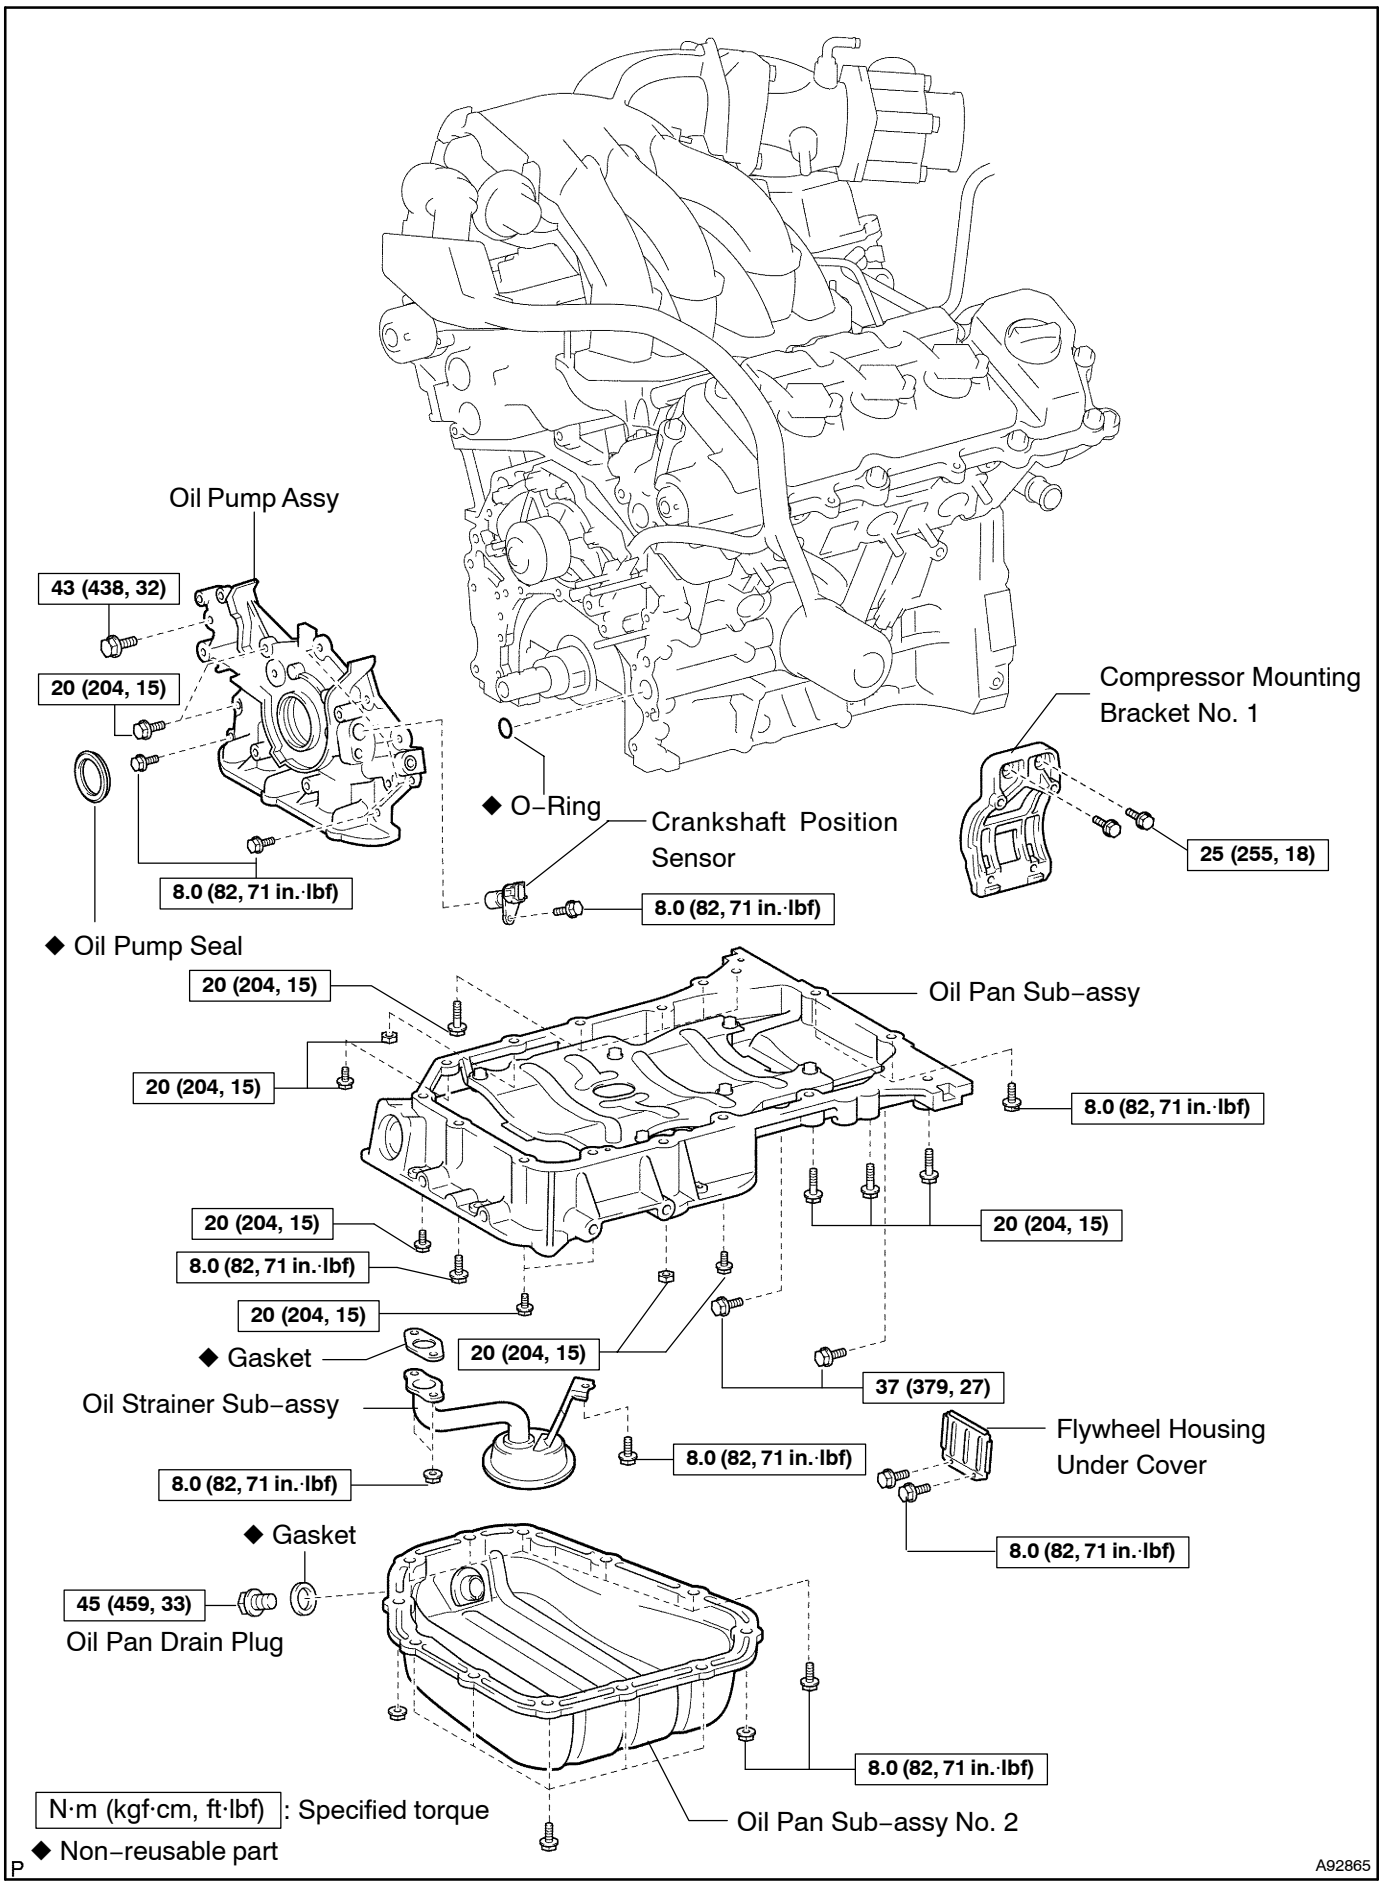
Oil Pump Assy
43 (438, 32)
20 (204, 15)
8.0 (82, 71 in.·lbf)
◆ Oil Pump Seal
◆ O–Ring
Crankshaft Position Sensor
8.0 (82, 71 in.·lbf)
Compressor Mounting Bracket No. 1
25 (255, 18)
20 (204, 15)
20 (204, 15)
Oil Pan Sub–assy
8.0 (82, 71 in.·lbf)
20 (204, 15)
8.0 (82, 71 in.·lbf)
20 (204, 15)
20 (204, 15)
◆ Gasket
Oil Strainer Sub–assy
8.0 (82, 71 in.·lbf)
37 (379, 27)
8.0 (82, 71 in.·lbf)
Flywheel Housing Under Cover
8.0 (82, 71 in.·lbf)
◆ Gasket
45 (459, 33)
Oil Pan Drain Plug
8.0 (82, 71 in.·lbf)
Oil Pan Sub–assy No. 2
N·m (kgf·cm, ft·lbf) : Specified torque
◆ Non–reusable part
A92865